AUGUST 1, 1918 PRICE 15 CENTS

NOTICE TO READER—When you finish reading this magazine place a one-cent stamp on this notice, mail the magazine and it will be placed in the hands of our soldiers or sailors destined to proceed overseas. No wrapping—no address

AVIATION AND AERONAUTICAL ENGINEERING

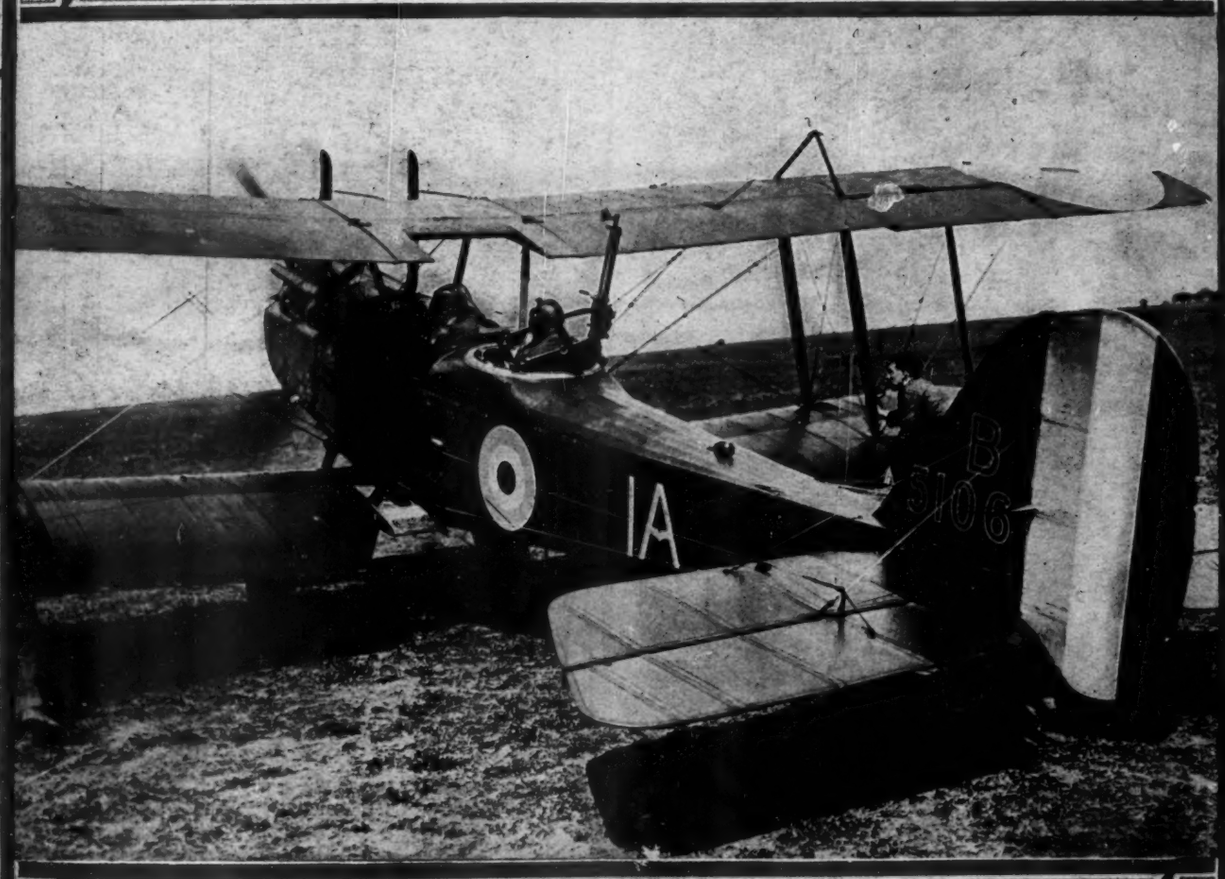

Feature Photo Service — British R.E.8 Combat Biplane — British Official

VOLUME V
Number 1

SPECIAL FEATURES

CONVENTIONAL PROPELLER CALCULATIONS

THE DE HAVILAND IV BIPLANE

PERMEABILITY OF BALLOON FABRICS

THE ROLAND D.II BIPLANE

COST OF THE AERIAL MAIL SERVICE

Two Dollars a Year

PUBLISHED SEMI-MONTHLY
BY
THE GARDNER-MOFFAT CO., Inc.
120 W. 32nd ST. NEW YORK

Entered as second-class matter, August 2, 1916, at the

AIRCRAFT

V. 5
Aug. 1918 –
Jan. 1919

MARTIN
U.S.A.

TRADE MARK

THE entire organization and skill, experience and ability of this company are devoted to intensive production in the interests of the United States for the period of the war.

WHEN peace comes Martin commercial and pleasure airplanes will maintain the supremacy of performance and dependability which they have held since 1909.

THE GLENN L. MARTIN COMPANY

CLEVELAND, OHIO

Contractors to the United States Government

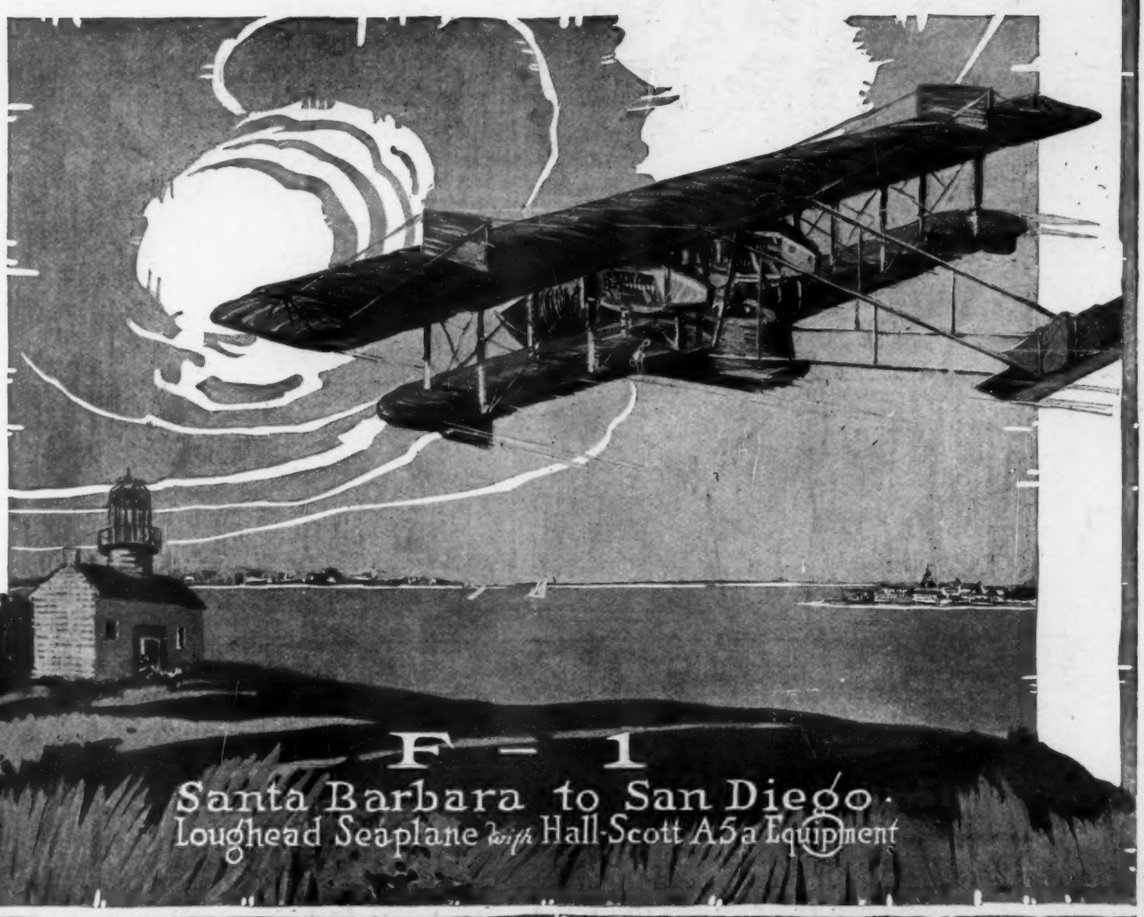

New American Endurance Run Established

On April 12th, the Loughead Seaplane F-1 established a new American duration record. This seaplane, the largest ever constructed on the Pacific Coast, made the trip, with a pilot and three passengers, from Santa Barbara to San Diego, a distance of 211 miles, in 181 minutes.

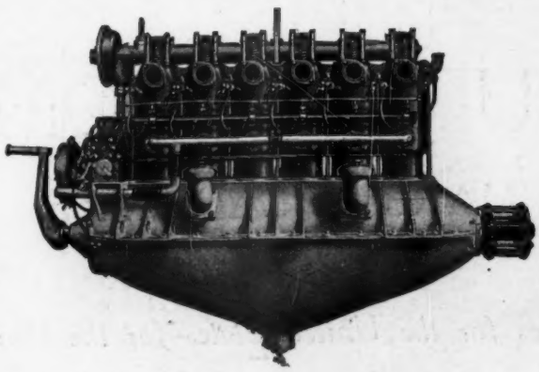

The F-1 is designed for aerial patrol and is motored by two Six Cylinder *Hall-Scott* A-5 150 *h.p.* Airplane Engines.

Catalog on Request

HALL-SCOTT MOTOR CAR COMPANY

General Offices: CROCKER BUILDING SAN FRANCISCO, CALIFORNIA

HALL-SCOTT

PROPERTY U. S. AIR FORCE

CONTRACTORS TO

The United States Army and Navy
The British Admiralty

THE BURGESS COMPANY

MARBLEHEAD, MASS.

Sole Licensees for the United States for the Dunne Patents

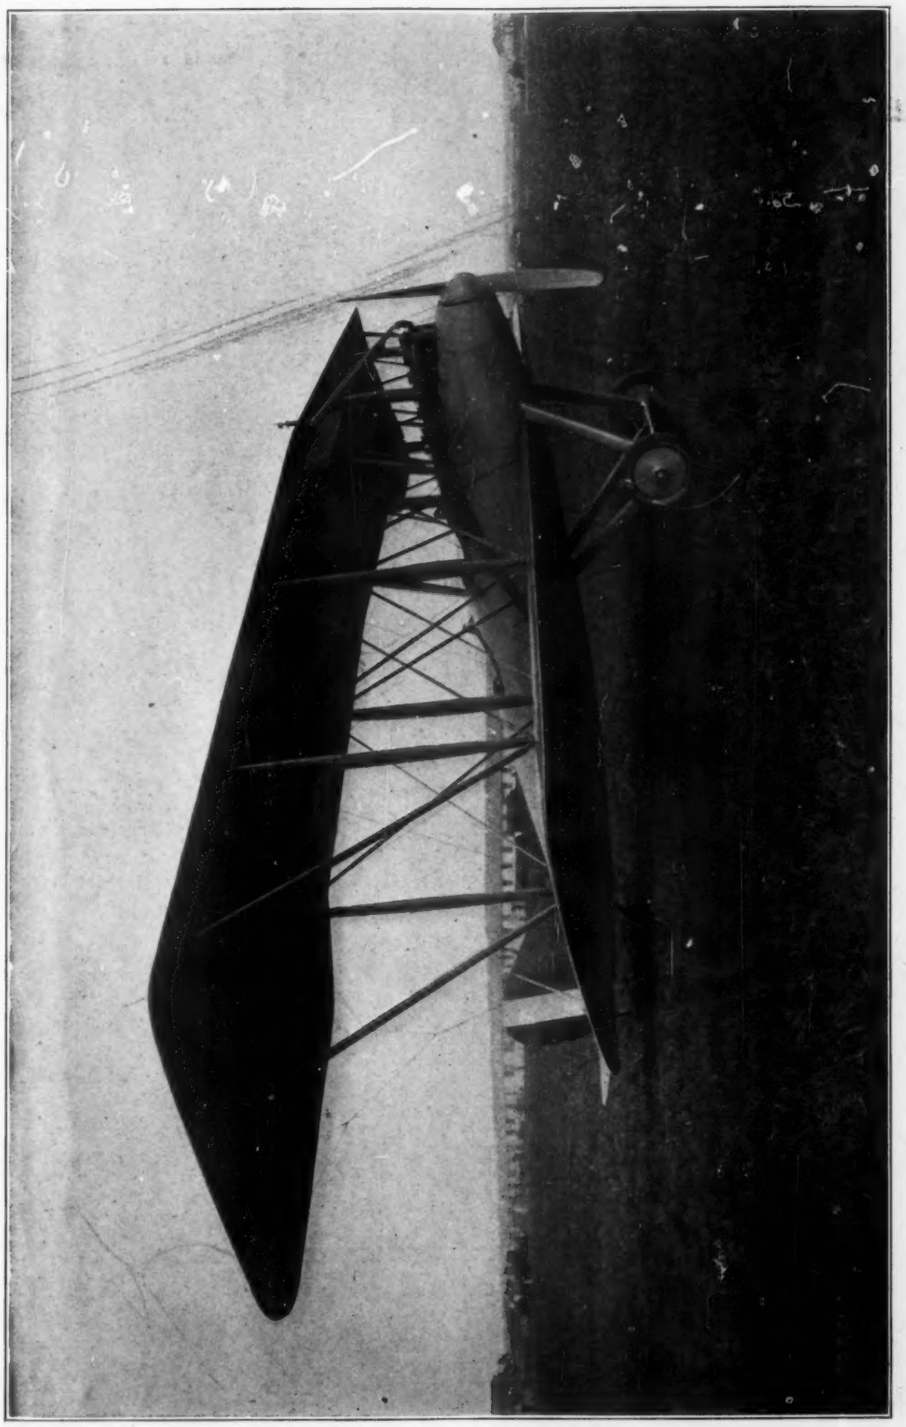

L·W·F·ENGINEERING·COMPANY·
COLLEGE POINT, N. Y.

NEW ENDURANCE RECORD

Established by

Union Airplane Motor at U. S. Aeronautical Testing Laboratory, Navy Yard, Washington, D. C.

Best previous record exceeded by fifty per cent.

UNION GAS ENGINE COMPANY

ESTABLISHED 1885

OAKLAND - - - CALIFORNIA

The Eagle's Wings

That Standard Production is a vital factor in giving wings of combat to our national bird, is a source of patriotic pride to the Standard Aircraft Corporation—"A Real Fighting Industry."

STANDARD AIRCRAFT CORPORATION

ELIZABETH NEW JERSEY

A·REAL·FIGHTING·INDUSTRY

BAKELITE

REG. U. S. PAT OFF

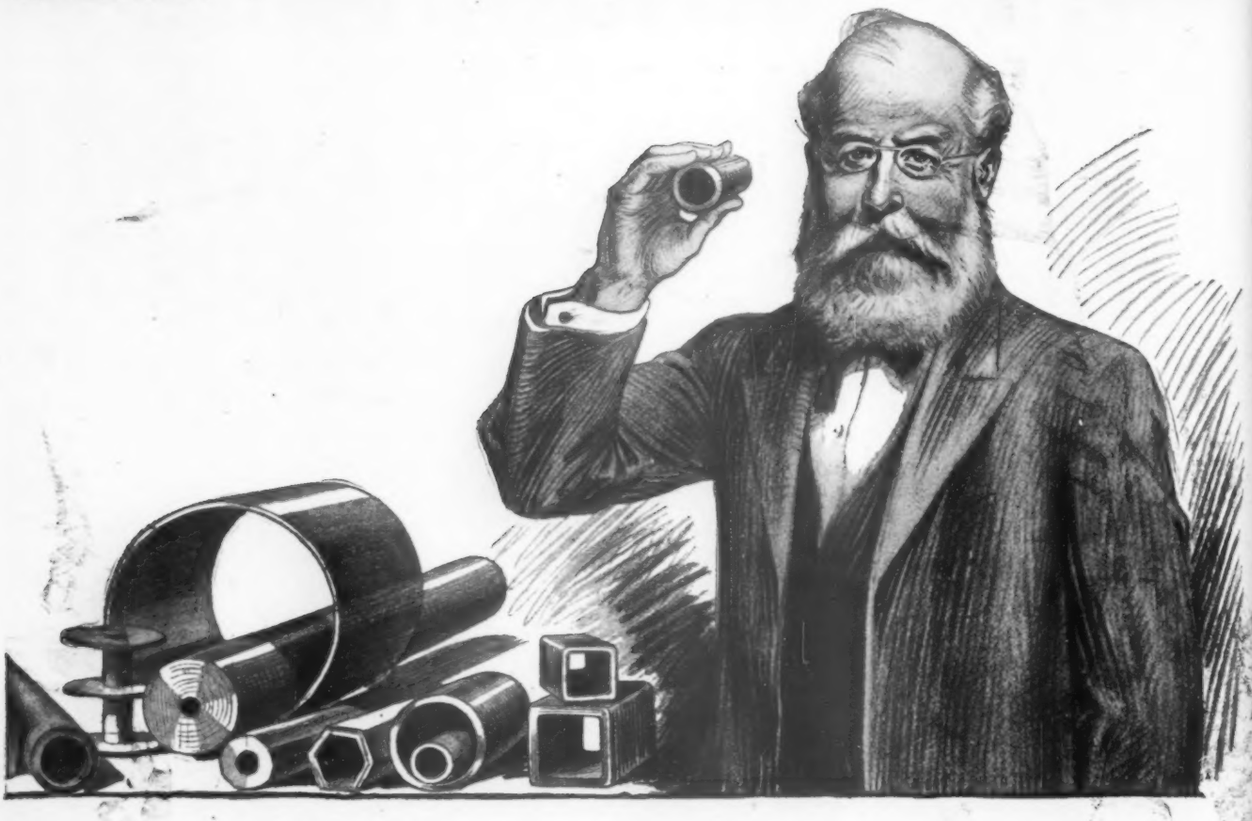

These Sheets, Tubes and Rods Save Moulding

"SOME of the most complex electrical and mechanical articles have been machined or punched from the many varied stock sizes of Bakelite Sheet, Tube and Rod.

These convenient forms of Bakelite afford the manufacturer who does not wish to incur the expense of making special moulds an opportunity to take advantage of the superior insulating and physical properties and easy machining qualities of Bakelite at a very nominal cost.

Bakelite Sheet, Tube and Rod possesses even greater mechanical and dielectric strength than Bakelite Moulded Insulation. It is unaffected by water, steam, oils, solvents and most chemicals and will not bloom or swell."

Orders for these forms of Bakelite should be directed to either the

CONTINENTAL FIBRE COMPANY
Newark, Delaware

WESTINGHOUSE ELECTRIC & MFG. CO.
East Pittsburgh, Pa..

The GENERAL BAKELITE COMPANY, 2 Rector Street, New York, welcomes inquiries from manufacturers and maintains a research laboratory for the working out of new applications, including those pertaining to flying machines.

2004-B

AIRPLANE STEEL

3½% COLD DRAWN NICKEL STEEL BARS

FOR AIRPLANE BOLTS
EYE BOLTS
CLEVIS PINS, ETC.

Special Analysis Stock Conforming to Government Specifications

Your inquiries are solicited. If you are a manufacturer and not on our mailing list, please send in your name

SALES OFFICES
1001 Ford Bldg., Detroit, Mich.
801 Conover Bldg., Dayton, Ohio
239 East Ohio Street
Indianapolis, Indiana

The Betz-Pierce Co.
"STEEL OF QUALITY"
2230-40 East Ninth Street, Cleveland

SALES OFFICES
1308-9 Park Bldg.
Pittsburgh, Pennsylvania
911 Peoples Gas Building
Chicago

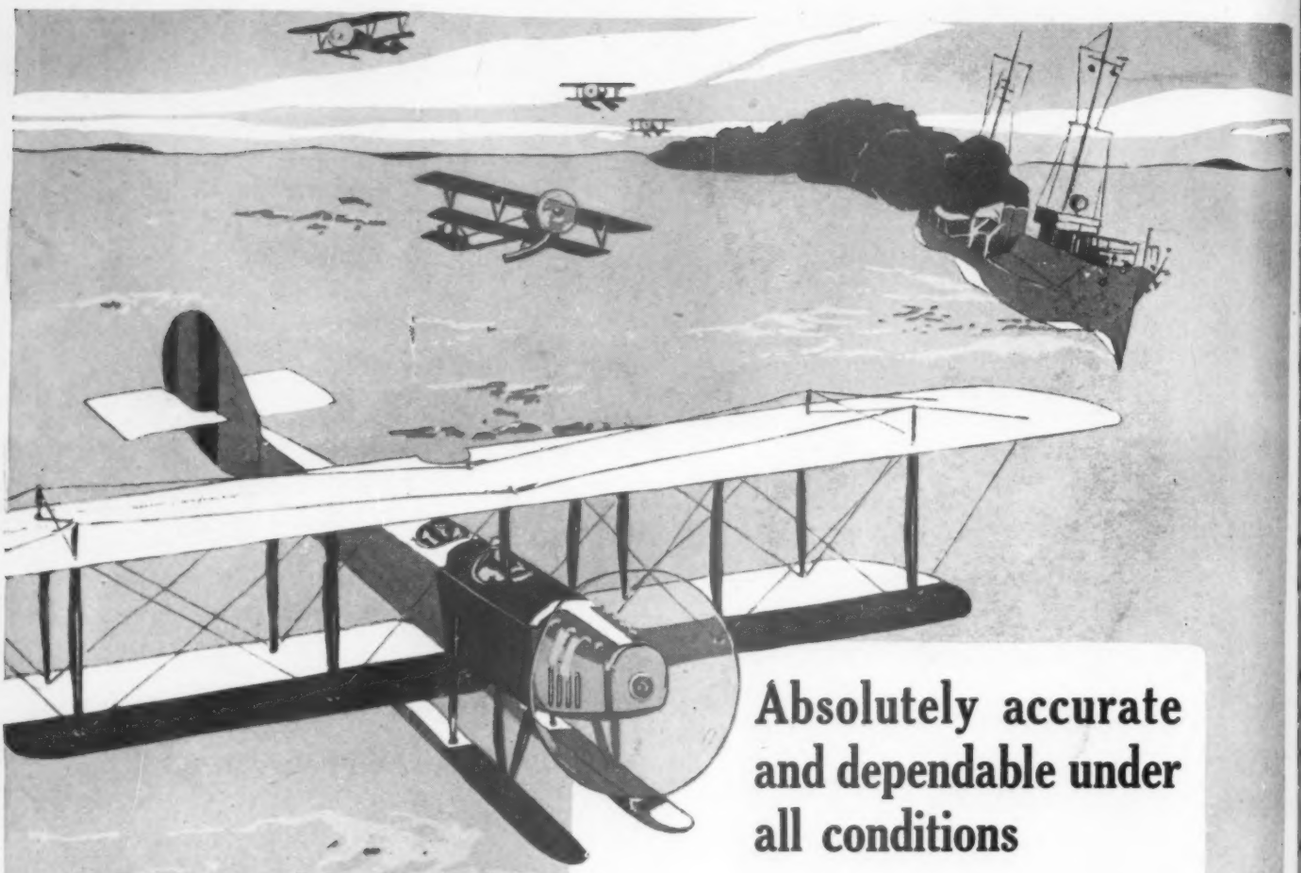

Absolutely accurate and dependable under all conditions

The Boyce Moto Meter tells the pilot the *exact* condition of his engine—any time, at any altitude, in any climate. A glance shows him whether it is becoming too hot—and equally vital—whether it is becoming too cold.

The Boyce Moto Meter is the only motor heat indicator which registers as low as freezing.

THE MOTO METER COMPANY, Inc.,
Contractors to the U. S. Government,
Long Island City, New York.

Creators of motor heat indicators. Exclusive Licensee of the Boyce Fundamenal Patents.

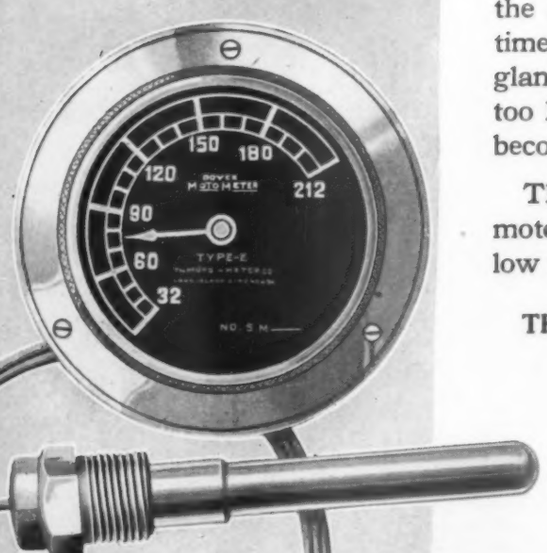

BOYCE MOTO METER

"We have been using NON-GRAN bearing bronze for three years in various parts of our truck. The quality of the metal has at all times been very uniform."

IN this positive fashion a manufacturer of motor trucks who is known best perhaps by the quality and performance of his product, has added his testimony to that of many others.

HIGH SPEED
NON-GRAN
BEARING BRONZE

American Bronze Corporation
Berwyn Pennsylvania

DU PONT AMERICAN INDUSTRIES

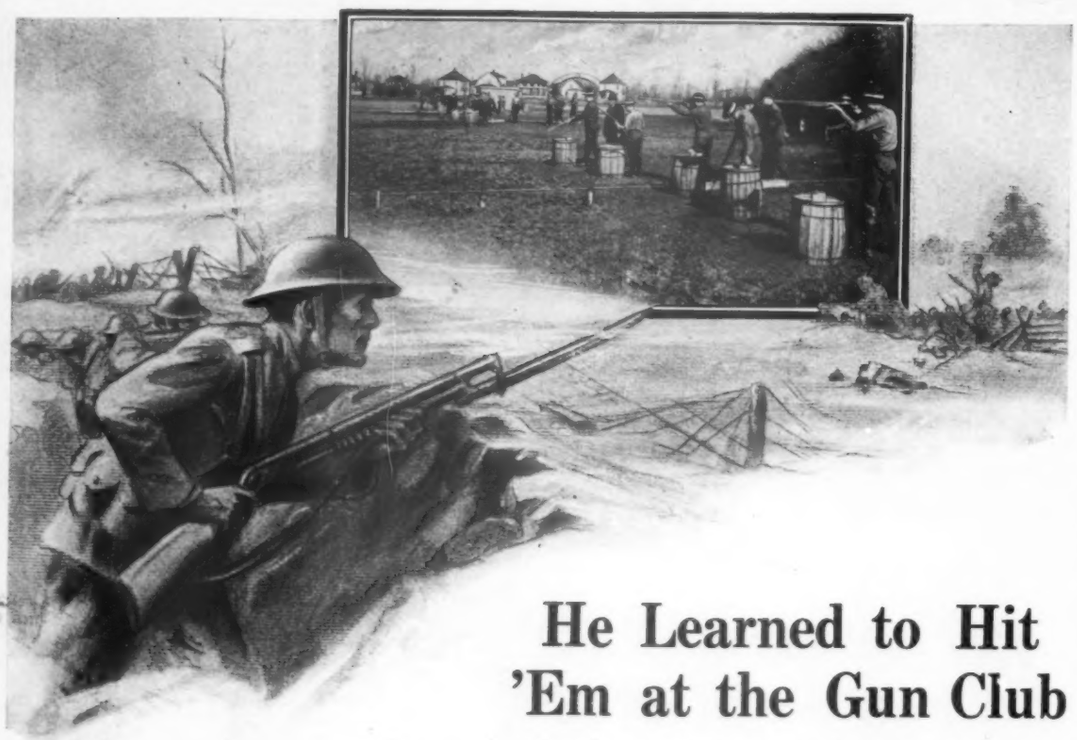

He Learned to Hit 'Em at the Gun Club

Back home he was a trapshooter. At the gun club he learned how to hit moving objects, ninety times out of a hundred.

Stopping a hand grenade in mid-air or dropping a charging Hun is "old stuff" for him.

At the cantonments and aviation camps in the U. S. and France regulation

TRAPSHOOTING

at-clay targets is a recognized part of the training. And with enemy trenches a few yards distant the bayoneted trench shotgun is proving a most efficient weapon of defense or offense.

Whether for prospective active service or home defense you can learn to "shoot and hit" at one of the thousand of gun clubs in this country. You will be welcomed at any club by good Americans who will loan you a gun and teach you how to handle it with skill.

For address of nearest club and Trapshooting Instruction Book check trapshooting in the coupon, sign your name and mail it now to

E. I. DU PONT DE NEMOURS & CO.

ESTABLISHED 1802

WILMINGTON DELAWARE

Mark X before subject that interests you and Mail This Coupon to

E. I. DU PONT DE NEMOURS & CO.
Advertising Division

WILMINGTON, Avia. DELAWARE.

☐ Trapshooting	☐ Auto Enamel
☐ Trapshooting for Women	☐ Rayntite Top Material
☐ Trapshooting Leagues	☐ Craftsman Fabrikoid
☐ Game Bird Booklet	☐ Fairfield Rubber Cloth
☐ Du Pont Sporting Powders	☐ Anesthesia Ether
☐ Industrial Dynamites	☐ Leather Solutions
☐ Blasting Powder	☐ Metal Lacquers
☐ Blasting Supplies	☐ Refined Fusel Oil
☐ Farm Explosives	☐ Commercial Acids
☐ Py-ra-lin Toilet Goods	☐ Alums
☐ Challenge Collars	☐ Py-ra-lin Enamel
☐ Town & Country Paint	☐ Wood Pulp
☐ Vitrolac Varnish	☐ Tar Distillates
☐ Flowhote Enamel	☐ Bronze Powder

Name _____

Address _____

City _____

State _____

Visit the Du Pont Products Store Boardwalk, Atlantic City, N. J.

The Du Pont American Industries are:

E. I. Du Pont De Nemours & Company, Wilmington, Del. . . . Explosives
Du Pont Chemical Works, Equitable Bldg., New York, Pyroxylin and Coal Tar Chemicals
Du Pont Fabrikoid Company, Wilmington, Del. . . . . Leather Substitutes
The Arlington Works, 725 Broadway, N. Y. Ivory Pyralin and Cleanable Collars
Harrisons, Inc., Philadelphia, Pa. . . Paints, Pigments, Acids and Chemicals
Du Pont Dye Works, Wilmington, Del. . . . . Dyes and Dye Bases

DU PONT

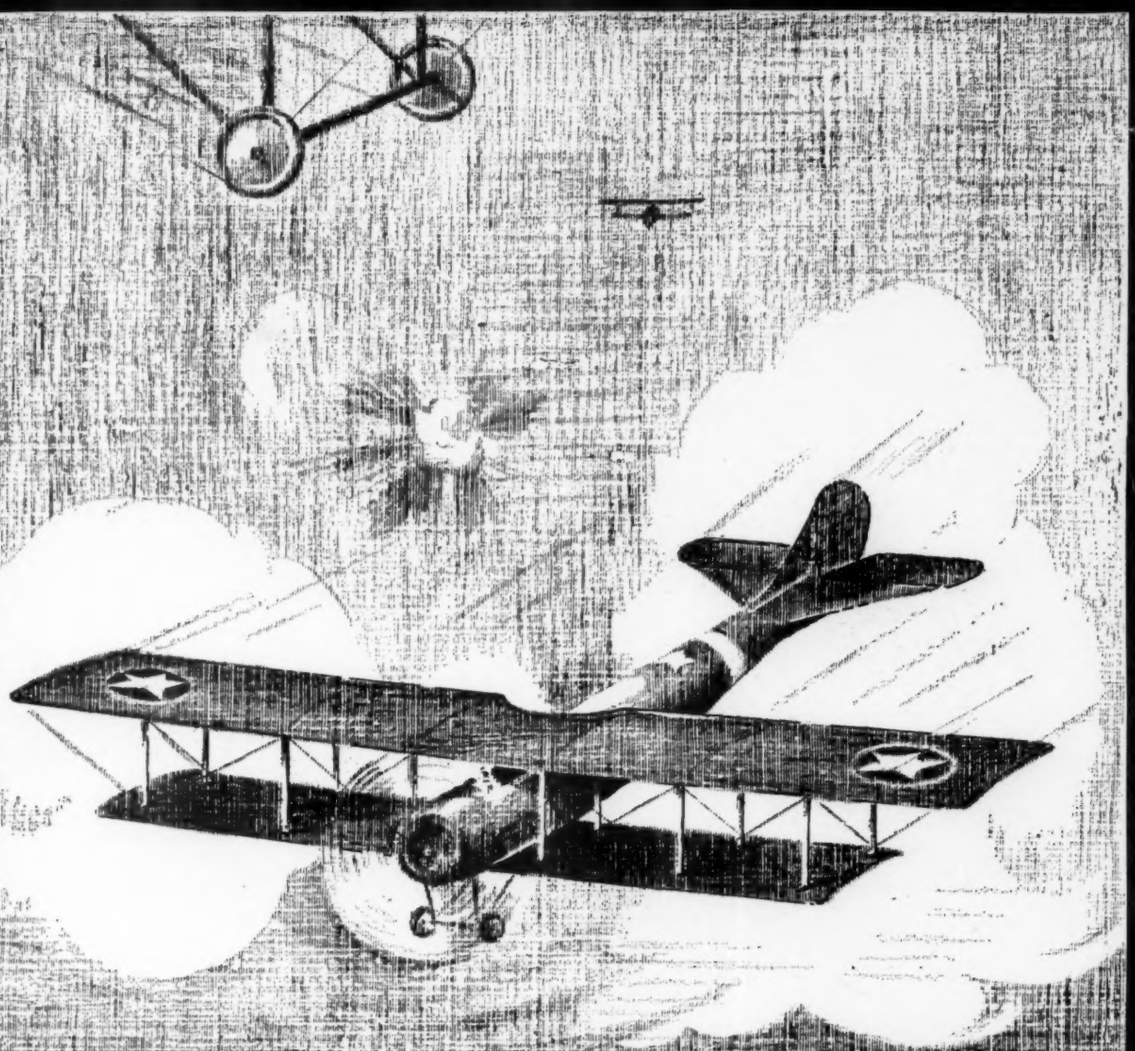

Kawneer
AEROPLANE PARTS

Our Three Big Plants are Now in Full Production

ON

Trailing and Leading Edges—Struts and Braces (stream line and oval)—Bent Tubing and Metal Fuselage Parts—All Steel Rudders—Elevators—Fins and Stabilizers—Special Metal Designs

KAWNEER MANUFACTURING COMPANY

BERKELEY, CAL. NILES, MICH. GUELPH, ONT.

GOODYEAR
AKRON

PHILBRIN

"Triplex Double" Ignition

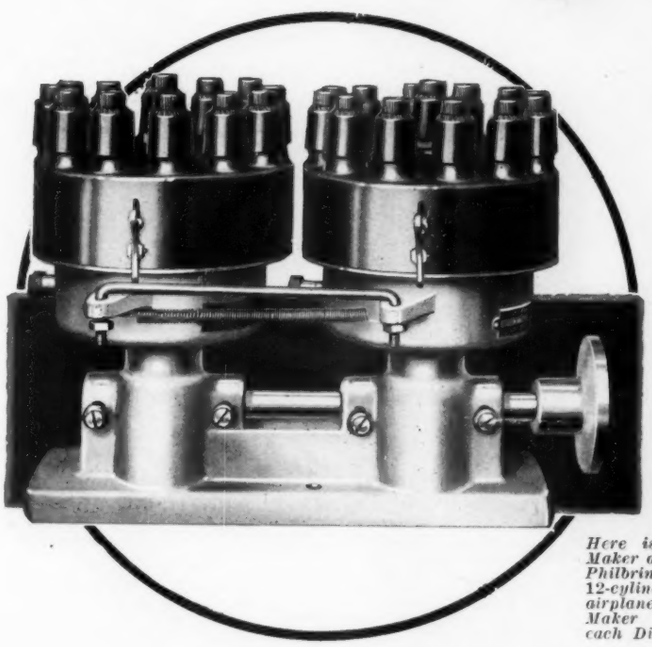

Here is shown the Contact Maker and Distributors of the Philbrin System devised for 12-cylinder, double ignition airplane motors. A Contact Maker is contained within each Distributor.

For Airplanes

The double ignition airplane motor presents a problem of spark synchronism which has found its solution in Philbrin Triplex Double Airplane Ignition.

This system is specially designed for double ignition motors. The current for both distributors is fed through one Contact Maker.

In other words, one Contact Maker SIMULTANEOUSLY fires both spark plugs in each cylinder. Thus perfect synchronism is assured.

Each spark is completely efficient and will continue so at all engine speeds and under highest compression. There is no speed that the engine can attain for which the Philbrin Contact Maker has not ample capacity. Due to inherent simplicity of design the Philbrin Contact Maker operates WITH PRACTICALLY NO LAG.

The Philbrin Triplex Double System embodies THREE separate systems of motor ignition—two virtually independent Single Spark Systems and one High Frequency or Emergency System. Each Single Spark System has its Contact Maker, located within one of the Distributors. Only one Contact Maker serves at a time. The other is always available by turning a switch.

The High Frequency System employs a magnetic interruptor; delivering a "shower of sparks" to each cylinder through the same pair of Distributors. This "shower of sparks" will fire any mixture that is ignitable. It has special value in case of emergency and provides efficient combustion under conditions such as:—a flooded carburetor, fouled plugs, a chilled motor, or inferior fuel.

This combination of three systems makes ignition failure practically impossible. It would be hard to conceive of an ignition system more adequately suited to airplane requirements.

Tests have been made of Philbrin Triplex Double Ignition on double ignition motors and the results of these tests should be of genuine interest to airplane engineers. They are available to responsible parties.

PHILIPS-BRINTON COMPANY

525 South Broad Street Kennett Square, Pa.

3+X=34

The ingredients in varnish are simple—usually three—gum, turpentine and oil.

The requirements of varnish are complex—in the case of the United States Signal Corps for Airplane work they number 34 specifications.

Between the three simple ingredients and the satisfaction of the thirty-four conditions there is one vital interval, and that is the process of manufacture.

No book tells exactly how to make varnish. No college teaches the process. No process is invented over night.

In the Sherwin-Williams plant, specific processes have been growing for fifty-two years. Time, temperatures, proportions and experience are the determining elements that enable us to make a varnish for any purpose with practically the same three ingredients.

Air-Plane Rexpar is a definite combination of the correct processes and the correct ingredients. It meets all the specifications designated by the United States Signal Corps for Airplane work. It was ordered by the United States Government because it passed all tests, and could be had at a reasonable price and in any quantity. The first order for 16 carloads is the largest individual order for varnish on record.

Sherwin-Williams resources in experience, materials, plant capacity and shipping facilities are adequate for any demand, and on any specification.

The varnish on airplanes shall

1. Protect wood.
2. Protect doped linen.
3. Protect doped cotton.
4. Protect metal.
5. Be long oil varnish.
6. Resist air.
7. Resist light.
8. Resist water.
9. Resist natural gas.
10. Resist illuminating gas.
11. Have proper brushing qualities.
12. Have proper flowing qualities.
13. Have proper covering qualities.
14. Have suitable body.
15. Dry dust free rapidly.
16. Harden rapidly.
17. Be elastic.
18. Be clear.
19. Be transparent.
20. Be highest quality.
21. Match a fixed color solution.
22. Be durable.
23. Not flash below 95 degrees Fahr.
24. Not whiten under water.
25. Not dull under water.
26. Not show defects under water.
27. Stand air test during application.
28. Stand air test durihg drying.
29. Meet a fixed setting test.
30. Meet a threefold drying test.
31. Meet a severe bending test.
32. Be inspected before shipment.
33. Be inspected at destination.
34. Prove durable under fixed test.

Sherwin-Williams Air-plane Rexpar meets all these requirements.

THE SHERWIN-WILLIAMS COMPANY
War Sales Office, 601 Canal Road
Cleveland, Ohio

SHERWIN-WILLIAMS PRODUCTS

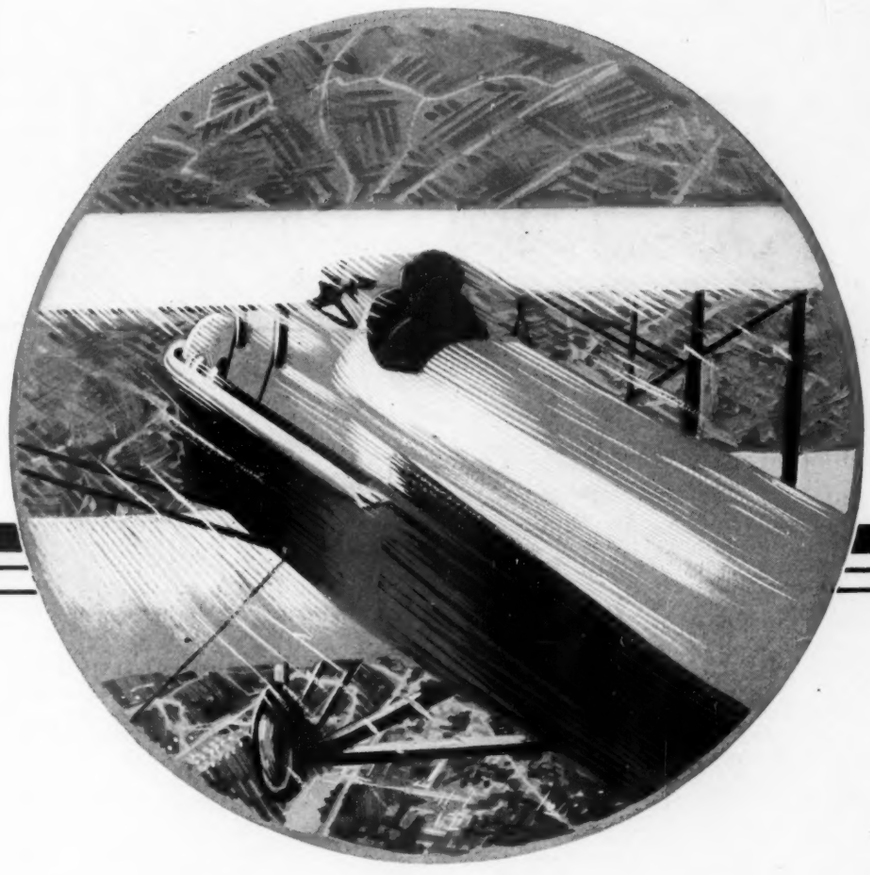

We manufacture the following parts for airplanes

All Standard Types of Turnbuckles Tie Rods and Clevises Thimbles Bolts and Clevis Pins

THE

DAYTON METAL PRODUCTS CO.

DAYTON, OHIO, U. S. A.

WYMAN-GORDON

Only long experience can produce forgings which will meet the exacting demands of the successful airplane.

The unvarying reliability of Wyman-Gordon products is the logical result of high ideals consistently maintained.

At every stage of manufacture, Wyman-Gordon forgings are subject to rigid inspection and tests, guaranteeing a perfect product.

Engineers and manufacturers are invited to consult with us in reference to any of their forging problems.

Wyman-Gordon Co.

WORCESTER, MASS. CLEVELAND, OHIO

GUARANTEED FORGINGS

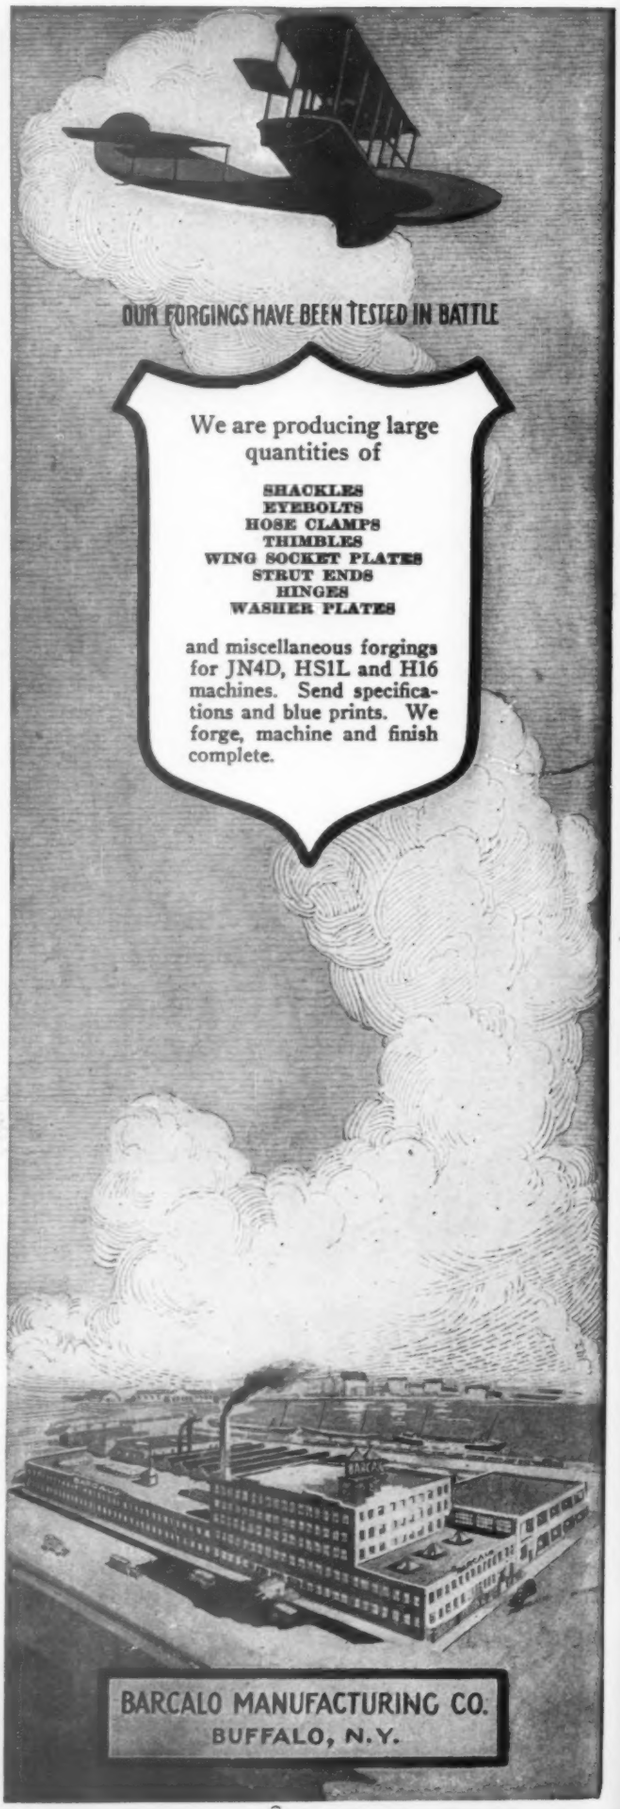

AUGUST 1, 1918

AVIATION
AND
AERONAUTICAL ENGINEERING

VOL. V. NO. 1

Member of the Audit Bureau of Circulations
Member of the Associated Business Papers, Inc.

INDEX TO CONTENTS

	PAGE		PAGE
Conventional Propeller Calculations	21	Cost of the Air Mail Service	36
The DeHaviland IV Biplane	27	Skilled Workmen May Be Retained	37
Permeability of Balloon Fabrics	30	Digest of the Foreign Aeronautical Press	38
The Roland D. II Biplane	34	News of the Fortnight	39

THE GARDNER - MOFFAT COMPANY, Inc., *Publishers*
120 WEST 32D STREET, NEW YORK
WASHINGTON OFFICE, 310 EVENING STAR BUILDING

SUBSCRIPTION PRICE: TWO DOLLARS PER YEAR. SINGLE COPIES FIFTEEN CENTS. CANADA AND FOREIGN: TWO DOLLARS AND A HALF A YEAR. COPYRIGHT. 1918, BY THE GARDNER-MOFFAT COMPANY, INC.

ISSUED ON THE FIRST AND FIFTEENTH OF EACH MONTH FORMS CLOSE FIVE DAYS PREVIOUSLY. ENTERED AS SECOND-CLASS MATTER, AUGUST 3, 1916, AT THE POST OFFICE AT NEW YORK, N. Y., UNDER ACT OF MARCH 3, 1879.

EFFICIENT AERIAL NAVIGATION DEPENDS UPON

Aeronautic Instruments
of
Accuracy and Precision

SPERRY - GYROSCOPE - COMPANY
MANHATTAN - BRIDGE - PLAZA
BROOKLYN - NEW - YORK
U - S - A

LONDON
15 Victoria St., N. W., 1

PARIS
126 Rue de Provence

QUALITY

New Departure Ball Bearings

Here are a few of many reasons for the QUALITY of this ball bearing:

Because it is of chrome alloy steel tubing specially made for us and *the best that money and skill can produce.*

Because our manufacturing processs exact dimensions that are accurate to a ten-thousandth part of an inch or *one-thirtieth the thickness of a human hair.*

Because each bearing is tested seventy-eight times during its development by precise instruments that assure maximum quality and accuracy.

Because the steel balls are made by ourselves from the best chrome alloy steel procurable and are insistently tested for strength, sphericity and uniformity of size.

The quality of New Departure ball bearings is the reason for their extensive use in automobiles, motor trucks, aeroplanes and all kinds of machinery.

THE NEW DEPARTURE MANUFACTURING COMPANY, BRISTOL, CONN.

Conrad Patent Licensee.

346-A

W. D. MOFFAT, PRESIDENT
W. I. SEAMAN, TREASURER
H. I. BOWNE, GENERAL MANAGER

AVIATION AND AERONAUTICAL ENGINEERING

H. M. WILLIAMS, MANAGING EDITOR
LADISLAS D'ORCY, ASSOCIATE EDITOR
GEORGE NEWBOLD, BUSINESS MANAGER

Vol. V | August 1, 1918 | No.1

Conventional Propeller Calculations

By F. W. Caldwell*

Under war conditions, when there is lack of time for extensive propeller trials and experimental work, we must be able to predict the performance of a propeller as to the horsepower absorbed at given airplane and engine speeds and as to its efficiency under these conditions. It is also necessary to make stress calculations for the purpose of predicting strength,

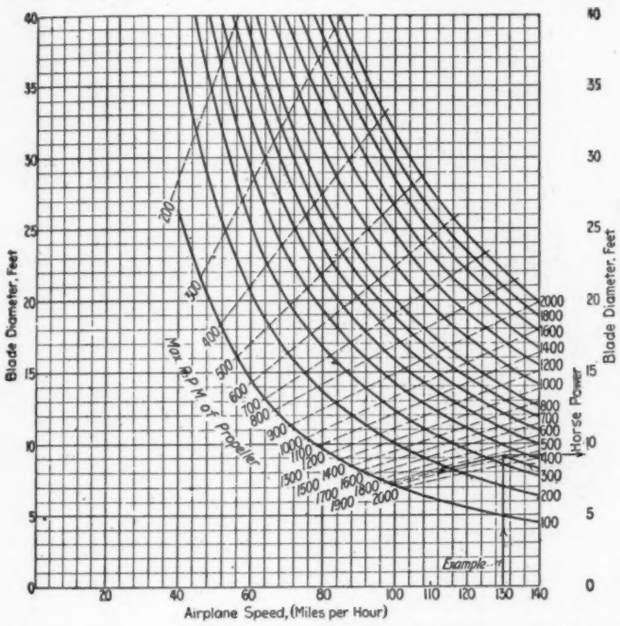

FIG. 1 CHART FOR DETERMINING PROPELLER DIAMETERS FOR 15 PER CENT SLIP. ALSO MAXIMUM PROPELLER SPEEDS FOR GIVEN DIAMETERS AND HORSEPOWERS

since there is usually no opportunity for a destructive test before the propeller has to be put into production. The main purpose of this paper is to show how such calculations are made.



FIG. 1A PROPELLER EFFICIENCY AT VARIOUS SPEEDS OF FLIGHT

The first step is to choose a diameter. The chart, Fig. 1, shows the minimum diameter required to maintain the slip as low as 15 per cent. The chart also shows the maximum propeller speed that can be used for any given diameter and horsepower. If the speed is greater than that shown as the maximum, a smaller diameter must be chosen for the propeller, and there is a consequent loss in efficiency.

The diameters given are minimum diameters for good practice. In general the diameter should be made as large as possible without making the blades so narrow that they will flutter excessively when wood construction is used. Plane designers should bear in mind the necessity of ample propeller diameter in laying out a power plant installation; an otherwise excellent design may be spoiled by limitations of clearance, resulting in too small a propeller diameter.

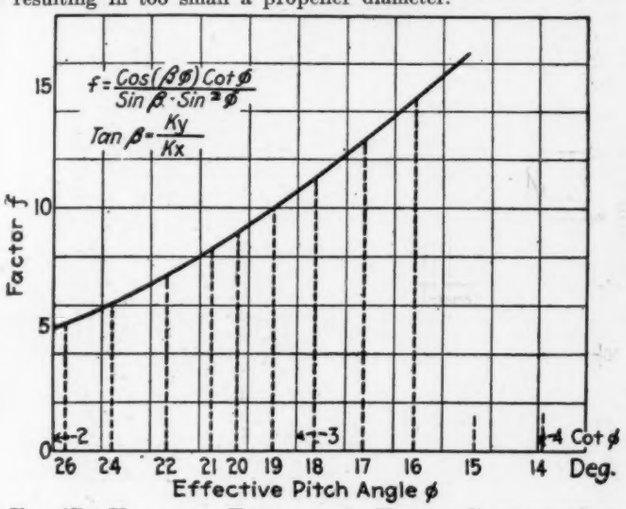

FIG. 1B VALUES OF FACTOR f FOR VARIOUS EFFECTIVE PROPELLER PITCH ANGLES

After determining the diameter, a blade form must be chosen. The question of the outline of the blade form is an unsettled one, since different blade forms are based on elaborate theories. The difference in efficiency of different blade forms is not great, but the difference in strength is considerable. The form shown in Fig. 2 is a fair one, both as to efficiency and strength.

The following nomenclature relating to propeller design will be used in this paper:



FIG. 2 EXPERIMENTAL BLADE FORM

ρ = specific weight of air expressed in pounds per cubic foot.
g = acceleration due to gravity = 32.2 f.p.s.
K_y = lift coefficient, absolute units.
K_x = drag (or drift) coefficient, absolute units.
L = vertical component of force (lift) on aerofoil, pounds.
D = horizontal component of force (drag) on aerofoil, pounds.
f = factor for computing work absorbed by propeller.
C = empirical constant depending on blade form.
S = area of plane surface, square feet.
V = velocity of airplane, feet per second.
P_e = effective pitch of propeller or advance per turn.
V_1 = velocity (in helical path) of propeller element, feet per second.
v = velocity of slip stream, feet per second.
b = maximum blade width, feet.

* Aeronautical Mechanical Engineer, Aviation Section, Signal Corps, U. S. Army. Paper read before S. A. E. Convention at Dayton.

b_1 = effective blade width, feet = $0.75b$ for blade form in Fig. 2.
N = engine speed at ground level, rev. per second.
N_1 = engine speed at 20,000 ft. altitude, rev. per second.
d = diameter of propeller, feet.
D_1 = equivalent diameter of propeller, feet = $0.580d$ (for computing work absorbed only).
R = radius of propeller, feet.
T = thrust, pounds.
A = area of propeller disk, square feet.
A_1 = effective area of propeller disk, square feet $\left(= 0.95\pi \frac{d^2}{4} \right)$ (as corrected for the 5 per cent area considered ineffective due to the radiator).

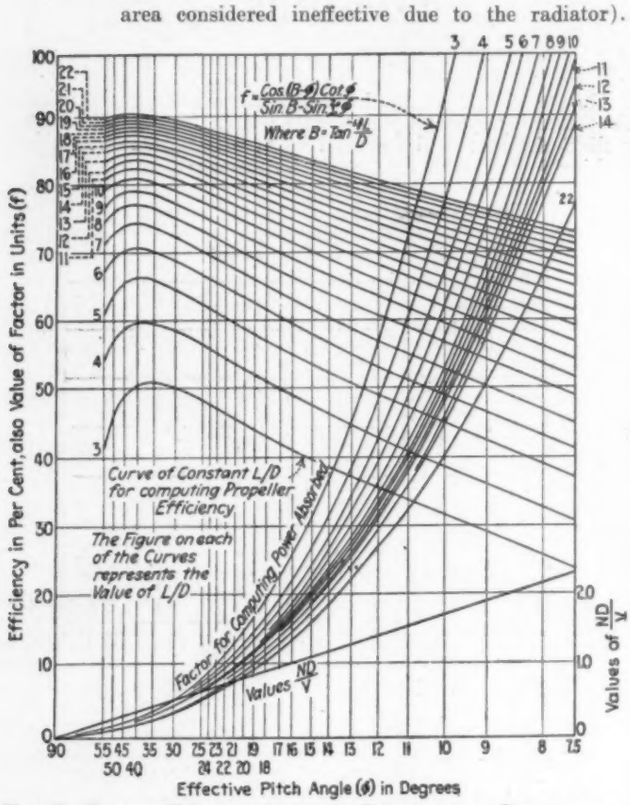
Efficiency in Per Cent, also Value of Factor in Units (f)
Effective Pitch Angle (φ) in Degrees
Values of ND/V
f = Cos(B-φ) Cot φ / Sin B - Sin φ
Where B = Tan⁻¹ 4L/D
Curve of Constant L/D for computing Propeller Efficiency
The Figure on each of the Curves represents the Value of L/D
Factor for Computing Power Absorbed
Values ND/V

FIG. 3 CURVES USED BY AIRCRAFT ENGINEERING DIVISION OF AIR SERVICE, U. S. A., IN CALCULATING PROPELLER EFFICIENCY, FACTOR f AND $\frac{ND}{V}$

$\varphi = \tan^{-1} \frac{V}{\pi Nd}$ (effective pitch angle).

$\beta = \tan^{-1} \frac{K_y}{K_x}$

θ = blade angle, degrees.
e_1 = theoretical efficiency (Froude Method), per cent $\left(= \frac{100V}{V + v/2} \right)$
e_2 = aerofoil efficiency, per cent.
e = true efficiency, per cent $(= e_1 \times e_2)$.

It is necessary to solve for blade width and angle of attack by means of an empirical formula. As a rough rule the angle of attack may be taken as 2 deg. for plane speeds above 100 m.p.h. and 3 deg. for plane speeds below 100 m.p.h. The method of checking this would go beyond the scope of this paper, which is intended to cover only fundamentals.

The maximum blade width should be about one-twelfth the diameter for the best practice. This gives an "aspect ratio" of six for each blade.

The usual method of computing blade widths consists in dividing the blade into zones and treating each zone as a separate aerofoil. The power absorbed by each zone is then found from the formula

$$\text{Work for zone} = \frac{\rho}{g} K_x S V_1^3. \qquad (2)$$

This may be simplified by taking an average value of K_y for the blade and a weighted mean for the blade width. The power absorbed per blade is then found from the formula:

$$\text{Power} = \frac{\rho}{g} K_y b_1 R V^3 f C \text{ ft.-lb. per sec.} \qquad (3)$$

The value of f may be obtained by taking 0.58 of the diameter to represent an equivalent diameter for the whole blade. (This value has been established experimentally for blade form shown in Fig. 2.) Then the value of $V/0.58\pi Nd$ is calculated, as is the corresponding angle whose tangent is $v/0.58\pi Nd$, and the corresponding value of f is found on the chart, Fig. 3.

The ordinate corresponding to the angle is followed until it crosses the line corresponding to an L/D of the section, and the corresponding value of f is read on the scale at the right or left. An average value of L/D may be assumed with sufficient precision to be twenty, when using this method.

The empirical constant C is dependent on the blade form and must be determined experimentally. For the blade form shown in Fig. 2 it is 1.1, while it varies from 0.85 to 1.2 for different blade forms now in use. The symbol b_1 represents the weighted mean of the blade width. This weighted mean of the blade width is found by determining the mean ordinate of a curve in which the cubes of the radii of the blades sections are laid off as abscissae and the corresponding blade widths are laid off as ordinates. This empirical method gives good results.

The best method of computing propeller efficiency consists in an extension of the water-propeller theories. The theoretical efficiency $V/(V + v/2)$ is computed. First the thrust is computed and then the slip-stream velocity from the impact formula $T = \frac{\rho}{g} AVv$.

To compute the aerofoil efficiency a representative point along the blade is taken. This will usually be at 75 or 80 per cent of the radius according to the blade shape; for the blade shown in Fig. 2 it is at about 78 per cent. The product of the theoretical and aerofoil efficiencies gives the actual efficiency very closely. There is a further small correction due to the spiral component of the slip stream.

The angle whose tangent is $V/0.78\pi Nd$ is found and a corresponding ordinate φ, Fig. 3, is followed until it crosses the efficiency line corresponding to the L/D of the aerofoil section at 0.78 of the radius. This L/D will be about twenty in good design.

Propeller Materials

Wood has been the favorite propeller material up to the present. Its success is mainly due to its high tensile strength, light weight and flexibility. Flexibility is an important factor in reducing propeller stresses, as can be seen from Figs. 4 to 6. When the thrust is applied to a wooden propeller, the blade bends and the centrifugal force creates a moment tending to restore it to its original position.

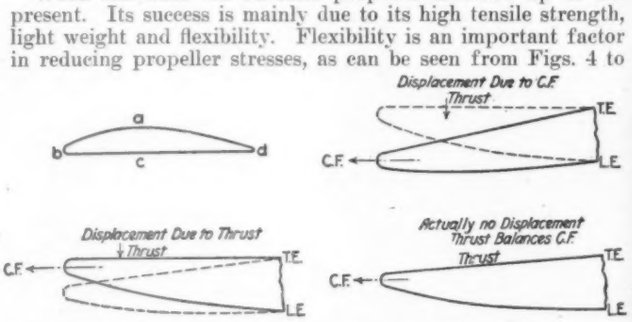

FIGS. 4, 5, 6 DEFLECTIONS CAUSED BY AXIAL THRUST AND CENTRIFUGAL FORCE. ALSO CROSS-SECTIONAL VIEW OF BLADE

The lack of flexibility is evidently one of the weaknesses of steel propellers, since the metal cannot bend and accommodate itself to the different flying attitudes. This difficulty can be overcome for any single flying attitude and air density by offsetting centers of gravity of different sections in such a way that the bending moment due to air pressure is compensated for by the bending moment due to centrifugal force.

A few photographs of steel-propeller failures are reproduced as Figs. 7 to 14. None of these propellers was carefully designed, so that the failures occurred after a few minutes' running at comparatively low speeds. All of these propellers

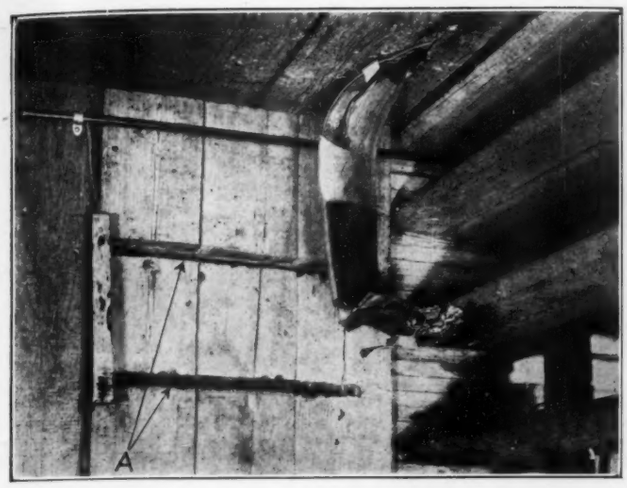

FIG. 7 VIEW AFTER FAILURE OF PROPELLER WITH STEEL BLADE EMBEDDED IN ROOF
A—Observers' slots

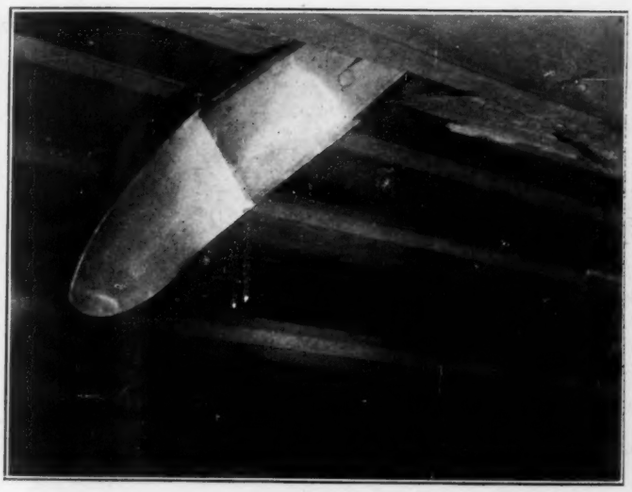

FIG. 11 PROPELLER BLADE EMBEDDED IN ROOF AFTER FAILURE
This propeller consisted of two steel plates riveted to a forged hub. Destroyed after five min. at 1800 r.p.m.

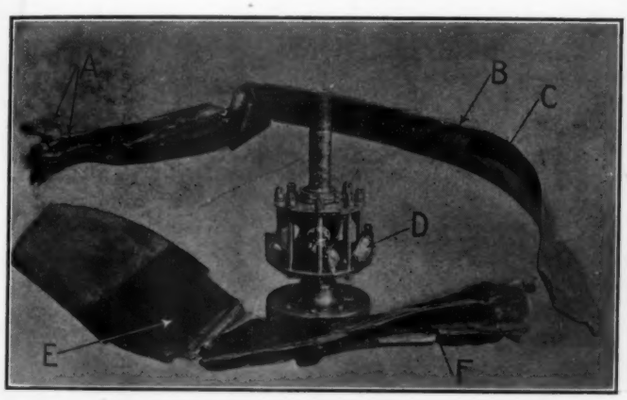

FIG. 8 PARTS OF PROPELLER SHOWN IN FIG. 7
A—Hub bolts, sheared 0.065 in. sheet steel hub. Destroyed after 2 min. at 1330 r.p.m. B—Rubber coating. C—Bare steel. D—Rubber in hub. E—Balance hole. F—Riveted edges.

FIG. 12 PARTS OF PROPELLER SHOWN IN FIG. 11
A—Hub uninjured. B—All rivets failed in double shear. C—Shaft broke. D—Oval rivet sheared.

were heavier than the wood propellers designed for the same service, and in none of them was the strength of the same order of magnitude as in the wood propellers. We have repeatedly tested wood propellers at speeds up to 2500 r.p.m. without injury.

Upper view of steel propeller before whirling test.

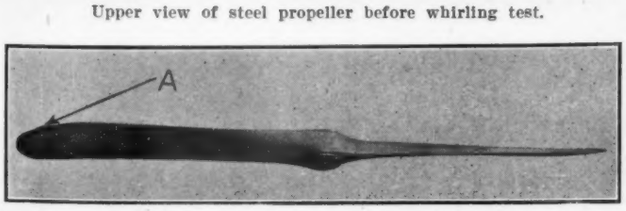

Lower view shows opening (*A*) at seam at leading edge. Failure after 14 min. at 1400 r.p.m. A piece welded inside from blade for balancing flew out of the tip.

FIGS. 9 AND 10

Among the propeller materials experimented with up to date the metals have shown the least encouraging results. While I do not consider a steel propeller out of the question, it is certain that the results to date have been discouraging. Steel propellers should be given a thorough ground test before being used in flight on an airplane, since the failures are usually extremely sudden and are disastrous to the plane structure.

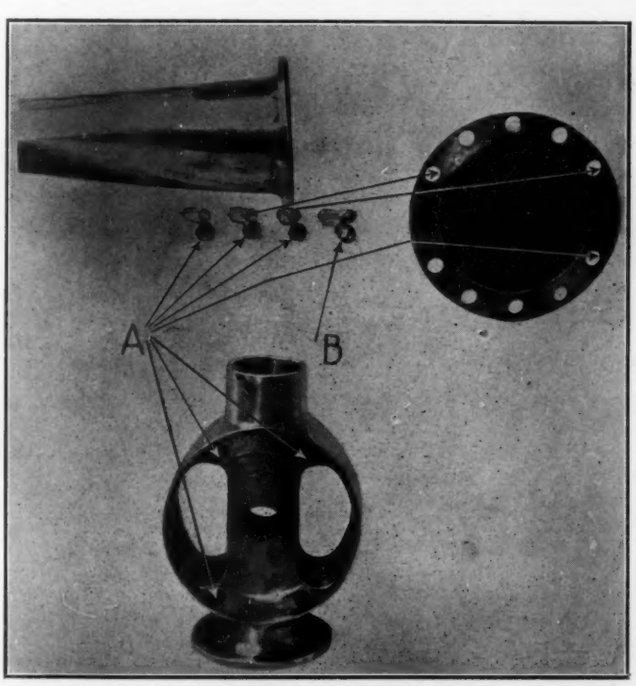

FIG. 13 HUB PARTS OF STEEL PROPELLER AFTER FAILURE, BLADES UNINJURED
A—Three bolts failed. B—One of five bolts uninjured.

Aerofoils

The aerofoil sections used have an important bearing on the propeller efficiency. The characteristics shown in Figs. 15 to 17 are taken from a report issued in 1912 by the National Physical Laboratory of England, and are about as good as any that have been published.

Adjustable-Pitch Propellers

Almost from the start of air-propeller work, a propeller with adjustable pitch has been considered highly desirable, because it is believed that the efficiency of the propeller could then be maintained constant for different airplane speeds. This is based on the theory that the L/D of the aerofoil section is the controlling factor in the propeller efficiency, a theory which is not borne out in practice.

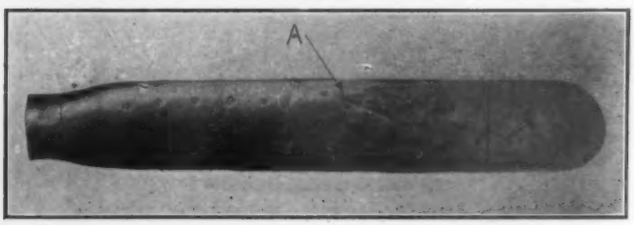

FIG. 14 BLADE OF SIMILAR PROPELLER, CRACKED AT *A*

Fig. 18 illustrates the effect of varying plane speed on the apparent angle of attack of a propeller section. This angle is usually chosen as 2 deg. for a flight speed of 130 m.p.h. and the aerofoil will then have a ratio of K_y/K_x of about twenty. In climbing at the rate of 70 m.p.h. the apparent angle of attack will be increased to about 10 deg., and the K_y/K_x ratio will drop to from ten to twelve.

Fig. 19 shows that the increase in true angle of attack is not so great when the slip stream velocity is taken into account; besides this, the theoretical efficiency $(V/V + v/2)$ is greatly reduced in climbing and is not increased by an increase in the aerofoil efficiency.

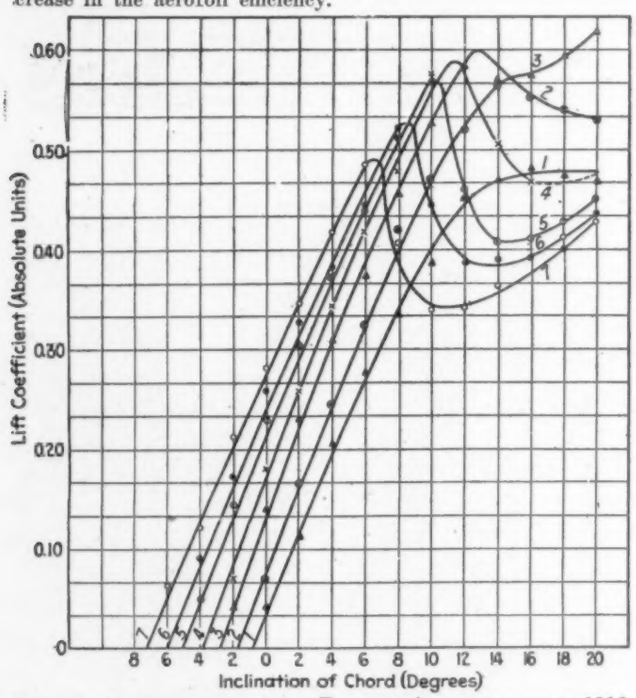

FIG. 15 CHARACTERISTICS OF TYPICAL AEROFOILS FROM 1912 REPORT OF NATIONAL PHYSICAL LABORATORY, ENGLAND

An analysis of an adjustable pitch propeller (appended to this paper) shows no gain in efficiency. There is, however, a net gain in horsepower delivered to the plane, owing to the increase of engine speed in climbing. For the case in question the gain in the rate of climb is 49 per cent. Fig. 20 shows the gain in the rate of climb in a somewhat slower machine.

The keeping up of the engine speed becomes of interest in connection with the development of an engine with torque that is constant at high and low altitudes. From the performance curves shown in Fig. 21 it is apparent that the climbing rate of a plane equipped with such an engine would be greatly improved if the engine speed near the ground were increased and kept the same as the plane climbs.

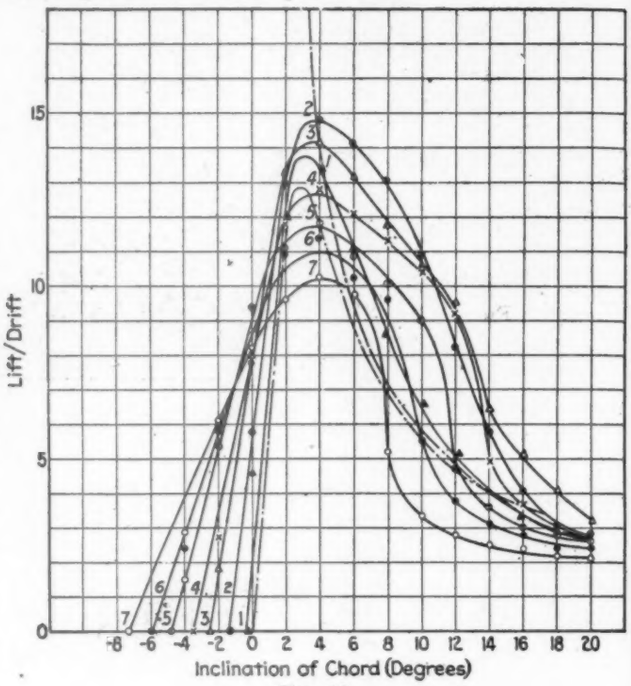

FIG. 16

It is the opinion of the author that, if it becomes desirable, an adjustable pitch propeller of fairly light weight can be built for a smooth running engine, such as the Liberty twelve,

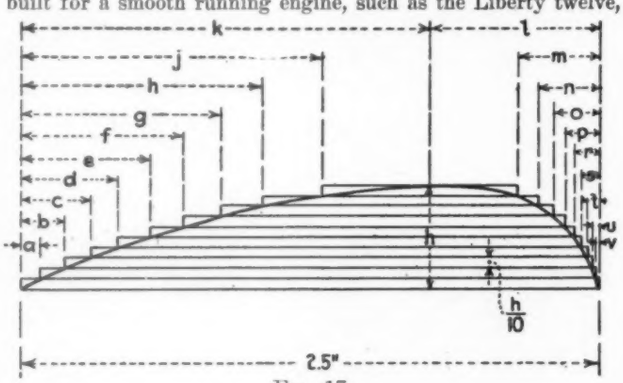

FIG. 17

but considerable trouble may be expected with engines that have an inherent vibration.

Constant Engine Power at Altitudes

The author has been told by many engine designers that it

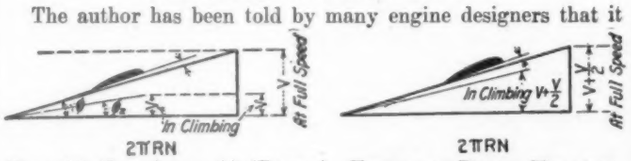

FIGS. 18 (LEFT) AND 19 (RIGHT) EFFECT OF PLANE VELOCITY ON ANGLE OF ATTACK

would be useless to build an engine to maintain its power at altitudes, because the propeller efficiency would then be so low that the net gain would be small.

All aeronautical engineers who have made a study of the subject realize that the development of an engine with constant, or nearly constant torque at altitudes up to 20,000 or 30,000 ft., is the one outstanding opportunity for improvement in airplane performance. It is just as easy to design propellers for operation at 20,000 ft. as it is to design them for performance at the ground level, so that the problem is one that must be solved by the engine designers.

The air density at 20,000 ft. is of the order of 50 per cent of that at ground level. The density of air is about 0.13 per cent of the density of water. Yet we are using the same means of propulsion in airplanes as is used in boats, and we are obtaining in practice efficiencies as high as 85 per cent, something which cannot be approached in marine practice. Not only is this true, but a propeller designed for use at 20,000

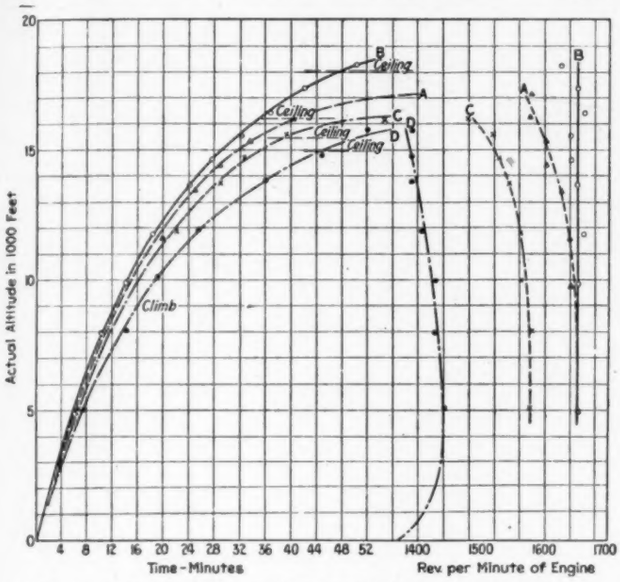

FIG. 20 COMPARISON OF CLIMBING TESTS OF ADJUSTABLE-PITCH PROPELLER

A—Pitch set at ground. B—Pitch changed during climb. C—Pitch set to check with D. D—Solid wood blade.

ft. will function without appreciable loss of efficiency near the ground, as may be seen from an analysis in which airplane and propeller performance are worked out in a typical case.

The words "constant torque" as used in the following analysis mean that the torque is independent of both the engine speed and the altitude. This is the simplest case to discuss, and the discussion applies exactly to this case alone. An engine that satisfies this requirement only in part would, of course, have a performance intermediate between that of the conventional gasoline engine and that of the engine with constant torque. This analysis is applicable equally to a steam turbine and is perhaps of more interest in relation to a steam turbine, owing to the range of speed involved.

In comparing the performance of the airplane and propeller at 20,000 ft. altitude and at the ground, we will assume:

1. Speed of airplane at ground level, 130 m.p.h., or 191 f.p.s.
2. Output of engine, 356 hp. (at 1400 r.p.m., or 23.3 r.p.s.).
3. Diameter of propeller, 11.5 ft. (area 104 sq. ft.).
4. Total lifting surface of plane, $S = 420$ sq. ft.
5. Total weight of loaded plane, $W = 3400$ lb.

The value of K_y in absolute units is computed from the formula

$$W = \frac{\rho K_y S V^2}{g} \tag{4}$$

$$K_y = \frac{3400}{0.00238 \times 420 \times 191^2} = 0.0933. \tag{5}$$

The corresponding value of K_y/K_x may be taken as 12.3.

The efficiency of the propeller can be computed by a method of trial as follows: First assume an efficiency of 80 per cent. The thrust will then be

$$T = \frac{0.80 \times 356 \times 550}{191} = 820. \tag{6}$$

The slip-stream velocity can be computed from the impact formula (2), and then

$$v = \frac{T}{AV\frac{\rho}{g}} = \frac{820}{104 \times 191 \times 0.00238} = 17.3 \text{ f.p.s.} \tag{7}$$

which means that the slip is 9 per cent.

From the Froude method the theoretical efficiency can be found as follows:

$$e_1 = \frac{V}{V + \frac{v}{2}} = \frac{191}{200} = 0.955. \tag{8}$$

Analysis of Propeller Efficiency

Assuming that the section at 0.75 radius is representative of the propeller as a whole and that the value of L/D at this section is twenty, the efficiency by the aerofoil method can be obtained from the chart shown in Fig. 3. It is first necessary to find the corresponding value of Nd/V, which is

$$\frac{Nd}{V} = \frac{1400}{60} \times \frac{0.75 \times 11.5}{200} = 1.01. \tag{9}$$

The aerofoil efficiency is found from Fig. 3 to be 85 per cent. The product of the two efficiencies (see equation 8) is $0.955 \times 0.85 = 81$ per cent. A further correction due to the spiral component of the slip stream will reduce this to 80 per cent. Since the assumption made in computing the slip-stream velocity was correct it need not be recomputed.

The drag of the supporting surfaces at ground level and at

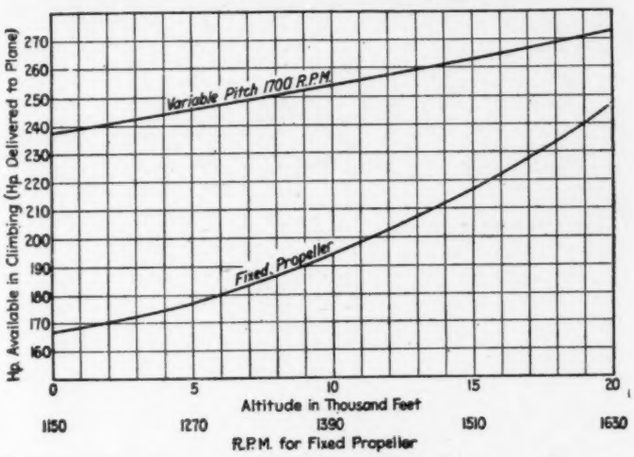

FIG. 21 PERFORMANCE OF PROPELLER FOR CONSTANT TORQUE ENGINE

a plane velocity of 191 f.p.s. will then be $3400 + 12.3 = 276$ pounds. The parasite resistance, that is to say, the propeller thrust minus the wing drag will be $820 - 276 = 544$ pounds.

At 20,000 ft. altitude the air density can be taken as 50 per cent of the density at ground level. As a first approximation assume that the propeller speed will vary in proportion to the cube root of the horsepower, the horsepower being proportional to the engine speed (if constant torque is assumed), and in inverse proportion to the cube root of the density; then in level flight.

$$N_1 = 23.3 \sqrt[3]{\frac{N_1}{23.3} \times \frac{1}{0.5}} = 33 \text{ r.p.s.} = 1980 \text{ r. p. m.} \tag{10}$$

Assuming a constant torque the engine will then deliver 503 hp. Assuming 80 per cent propeller efficiency

$$T = \frac{503 \times 0.80 \times 550}{V} = \frac{221{,}500}{V}$$

As a first approximation to determine K_x, assume the velocity to be proportional to the cube root of the horsepower delivered and inversely proportional to the cube root of the air density. Then

$$V = 191 \sqrt[3]{\frac{1}{0.5} \times \frac{503}{356}} = 270 \text{ f.p.s.}$$

$$\text{and } K_y = \frac{3400}{420 \times 0.00119 \times 270^2} = 0.0933.$$

The corresponding K_y/K_x will be 12.3 and K_x will be 0.00759.

$$\text{Thrust} = \text{Total Drag} = \left(\frac{\rho}{g} K_x S V^2\right) + \left(\frac{0.5}{1} \times 544 \times \frac{191^2}{191^2}\right)$$

Since $\frac{\rho}{g} = 0.00119$ at 20,000 ft. altitude, we have

$$\frac{221{,}500}{V} = \left(0.00119 \times 0.00759 \times 420 + \frac{0.5 \times 544}{191^2}\right) V^2$$

Whence

$$V = 270 \text{ f.p.s.} = 184 \text{ m.p.h.}$$

Thus the assumptions as to plane velocity are seen to be correct for constant torque, so that they need not be recomputed.

To find the propeller efficiency under the new condition the thrust is first computed from the formula

$$T = \frac{550 \text{ hp.} \times e}{V} = \frac{550 \times 503 \times 0.80}{270} = 820 \text{ lb.}$$

Again the slip-stream velocity will be

$$v = \frac{T}{AV\frac{\rho}{g}} = \frac{820}{104 \times 270 \times 0.00119} = 24.3 \text{ f.p.s.}$$

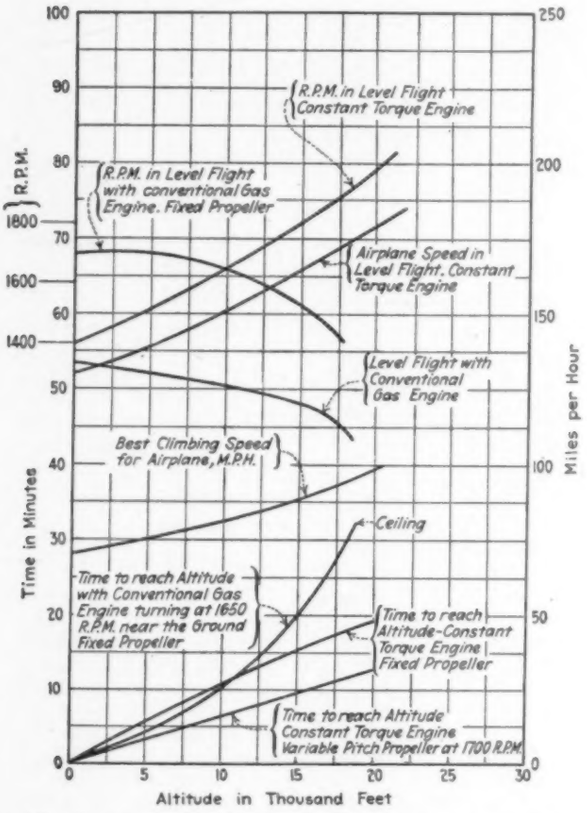
R.P.M.
Time in Minutes
Miles per Hour
Altitude in Thousand Feet
R.P.M. in Level Flight Constant Torque Engine
R.P.M. in Level Flight with conventional Gas Engine. Fixed Propeller
Airplane Speed in Level Flight. Constant Torque Engine
Level Flight with Conventional Gas Engine
Best Climbing Speed for Airplane, M.P.H.
Ceiling
Time to reach Altitude with Conventional Gas Engine turning at 1650 R.P.M. near the Ground Fixed Propeller
Time to reach Altitude-Constant Torque Engine Fixed Propeller
Time to reach Altitude Constant Torque Engine Variable Pitch Propeller at 1700 R.P.M.

FIG. 22 CLIMBING AND LEVEL FLYING PERFORMANCE OF AIRPLANE WITH CONSTANT TORQUE ENGINE COMPARED WITH THAT OF PLANE WITH CONVENTIONAL GAS ENGINE

The theoretical efficiency will be

$$e = \frac{V}{V + \frac{V}{2}} = \frac{270}{270 + 12} = 0.958.$$

Since Nd/V has the same value as before, the true angle of attack will be the same and the aerofoil efficiency will again be equal to 85 per cent.

The product of the two will as before be 81 per cent, and this will be reduced to 80 per cent by the correction for the spiral component of the slip stream.

It is apparent therefore that the efficiency of the propeller is the same for the two ı ying conditions, provided the engine torque is kept constant.

These results can be deduced without making the calculations as follows: The total lift of the plane may be expressed as

$$W = \frac{g}{\rho} K_y S V^2$$

in which S is constant for all altitudes and W and g are approximately constant. In order to maintain a constant angle of attack K_y must be held constant, then ρV^2 is constant, and V is inversely proportional to the square root of the density. For this condition the total drag of the machine will remain constant and the horsepower required to drive the plane will be equal to the horsepower required at the ground level multiplied by the ratio of the plane velocity at altitude to the plane velocity at the ground.

If the speed of the propeller is kept proportional to the velocity of the plane, its Nd and its V efficiency will be constant. To maintain this speed the engine horsepower must be proportional to the ratio of N^3 multiplied by the inverse ratio

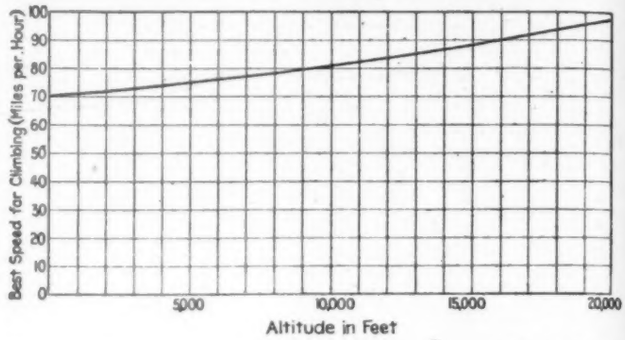

FIG. 23 FOR ABSOLUTE VALUE OF KEY, $\frac{L}{D}$ AND WING DRAG ARE CONSTANT. POWER ABSORBED BY DRAG OF WINGS WILL THEN BE PROPORTIONAL TO SPEED OF PLANE

of the air densities. But since N^2 is proportional to V^2 it is also inversely proportional to the ratio of air densities. It is consequently necessary to maintain only the engine horsepower proportional to the speed. This is obviously the definition of an engine with constant torque.

The rate of climb to be expected from a plane fitted with a constant-torque engine is shown graphically in Fig. 21.

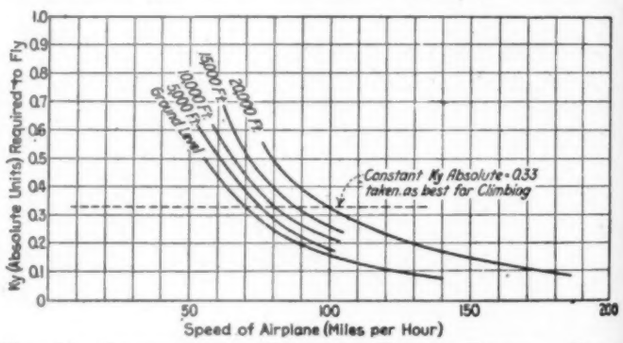
Ky (Absolute Units) Required to Fly
Speed of Airplane (Miles per Hour)
Ground Level
5000 Ft.
10000 Ft.
15000 Ft.
20000 Ft.
Constant Ky Absolute = 0.33 taken as best for Climbing

FIG. 24 PROPELLER FOR CONSTANT TORQUE ENGINE. BEST CLIMBING SPEED AT GROUND LEVEL 70 M.P.H.

If an adjustable-pitch propeller were applied to this engine, the propeller speed could be maintained at 1700 r.p.m. during the whole climb. The horsepower available and the rate of climb, Figs. 22 and 23, indicate such an improvement in the performance that the variable pitch feature becomes highly desirable.

Ceilings

Evidently the ceiling of such a plane is not limited by aerodynamical considerations, but only by the strength of the materials employed. The engine and propeller speed would continue to increase until something let go. The limiting speed of a propeller of this size would probably be about 2500 r.p.m. in thin air with the materials now in use. This would correspond to an air density equal to 31 per cent of that at the ground, and at an altitude of about 34,000 ft. In flying at greater heights it would be necessary to throttle the engine in order not to over-stress the propeller, so that the ceiling would be in the neighborhood of 45,000 feet.

In conclusion I wish to emphasize the fact that the variable-pitch propeller is, to a certain extent, limited to special cases. The design of a propeller for an engine with constant torque presents no difficulty, except that the climbing rate near the ground must be reduced, owing to the slow speed of the engine. This is not serious and can be entirely overcome by the use of a variable-pitch propeller. The interesting feature of this development is the great speed to be expected. It is not out of the question to attain speeds of 200 m.p.h. at an altitude of 30,000 feet.

The De Haviland-IV Biplane*

This large airplane employed for long distance reconnaissance and for bomb dropping, is chiefly built by the Aircraft Manufacturing Co., Ltd. (England). The different machines show minor differences in construction and outfitting according to the time of construction.

Both wings of the two strutter biplane, which have distinctly rounded tips, have a span of 12.93 m. and a chord of 1.67 m.

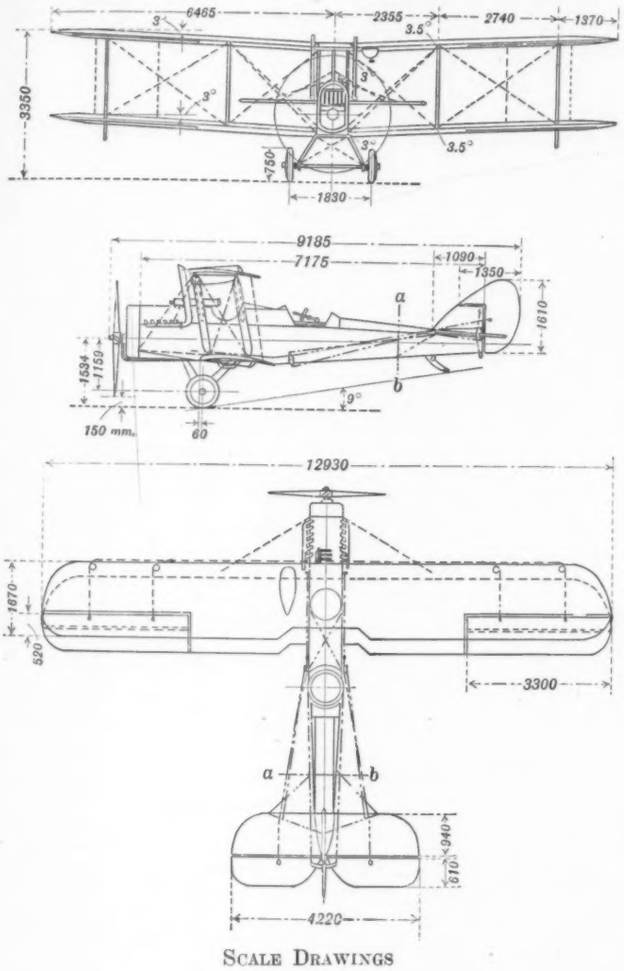

Scale Drawings

The stagger is 0.32 m. There is no sweep-back, but the upper and lower planes are attached respectively to a center section 0.7 m. wide and direct to the body, at a dihedral angle of 174 deg. The pilot, whose seat is right under the top plane center section, has a good view forward. The center section and wings have their trailing portions cut away in the center to give a better view backwards. The angle of incidence is 3 deg. at the body and at the top plane center section. Both main spars, which are of spruce, are of one section, left solid where occur the compression ribs. At these points and where fittings occur the spars are not only left solid but are reinforced by mahogany pieces glued and screwed on. At a point between the inner inter-plane struts and the commencement of the wing flaps the main wing spars are spliced and bound with fabric.

The wing ribs are only very slightly cambered on the under surface. Leading and trailing edges are slightly raised. Into grooves in the two flanges, which measure 13 mm. in width and 4.5 mm. in thickness, are glued and tacked with brass tacks the three-ply webs, which are provided with large lightening holes. The ribs at the struts and in the middle of each bay have flanges as wide as 37 mm. and the web between them is solid spruce between the spars. Between every two ribs, which are spaced 310 to 400 mm. apart, there is a false rib extending from the leading edge to the front spar. The internal wing bracing, which is of thickened wire, is in duplicate up to the middle of the outer bay. The wing covering is of a yellowish-white color, and is sewn to the ribs in such a way that the stitches surround the whole rib. In front of the trailing edge, which is in the form of a strip of wood, eyelets are incorporated in the under surface, which serve to equalize pressure and to drain out moisture.



Wing Spar Splice

The crank levers of the wing flaps, which in all the planes are hinged direct to the rear spars, are made of 1.5 mm. sheet aluminum, which is reinforced on either side by facings of wood riveted on. The same construction is employed for the elevator and rudder cranks. At their outer end, where the control cables are attached, the aluminum cranks are doubled over. The very simply arranged wing bracing consists of stream line wire, while the external drift bracing takes the form of cables.

The wing fittings are, as in so many other English machines, very simply carried out. Three mm. thick sheet steel plates at the outer plane struts, and 3 mm. and 2 mm. at the inner struts, having lugs bent to the angle of the bracing wires, are secured to the wing spars by two bolts. A large forked bolt passes through the center of the spar while a second smaller one

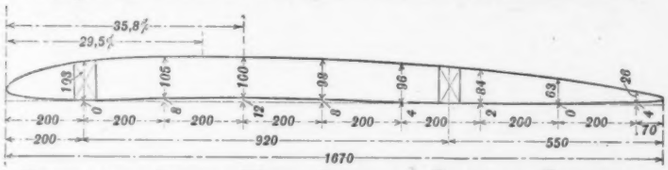

Upper and Lower Wing Section. Distance Between Ribs: Upper, 310 to 380 mm.; Lower, 310 to 400 mm.

passes down the outside of the spar. The interplane struts, which are made of spruce, are of streamline section, and the inner struts are kept stronger than the outer ones. On the ends of the struts are short sheet steel shoes into which are riveted aluminum packing pieces hollowed out in the center. Through these are passed 8 mm. steel bolts, which rest in the forked end of the spar bolts, the bracing wires keeping the



Plane Strut Sections: Center (I), Outer (II), Inner (III)



Upper and Lower Spar Sections

struts in place. The struts for the top plane center section are similarly attached.

The body is covered with ply-wood up to a point behind the gunner's cockpit, this part being built up without the use of diagonal bracing. The longitudinals are of spruce and the engine bearers of ash. The formers as well as supports for controls and machine guns are made of ply-wood, some of which is 13-ply and as much as 26 mm. thick. The fittings for the attachment of the lift wires are each connected with two 8 mm. through-bolts. The after portion of the body is carried out in the usual manner as a girder, and the longitudinals are spliced. This does not apply to the extreme rear part underneath the tail plane, which is covered with ply-wood 3 mm. thick. In the front the body has a rounded top. From the observer's seat vertical formers gradually carry the

* Translation of an article in *Flugsport*, reproduced by courtesy of *Flight*.

top into the rectangular section at the beginning of the tail plane.

The undercarriage is very light in proportion to the heavy machine. It weighs 54 kg. Each pair of struts is of solid wood and is not bound with fabric. Screwed to the struts are vertical strut-shoes of wood, which carry, in addition to the wheel axle, horizontal tubes for the attachment of the rubber shock absorbers. The axle rests between two cross-struts of wood, which are shaped to a fair shape and connected at the bottom by 3 mm. three-ply. In order to cause no eddies during the flight the axle is fitted into the streamline casing thus formed by covering its upper side with a layer



TAIL PLANE AND ELEVATOR: TAIL PLANE FRONT SPAR, 42 MM.; REAR SPAR, 50 MM.

of wood suitably hollowed out and secured to it with a wrapping of fabric. In order to better guide the axle in the slots in the struts this casing of wood is left square at this point, and entirely surrounds the axle. It is covered with sheet metal. The diagonal bracing of the undercarriage is in the form of streamline wire, and is only placed in the bay of the front chassis struts. In addition there is a horizontal tension wire running in front of the streamline cross-strut.

The tail plane, which is of rectangular plan form with rounded corners, is so attached to the body that its angle of incidence can be varied from the pilot's seat, during flight, from + 2 deg. to + 5 deg., as in the Sopwith. For this purpose its front spar is so mounted as to be free to rotate, while the rear spar with its bracing is secured to a vertical tube placed in front of the stern post. This tube carries a thread engaging with an internally threaded bobbin, bolted to the stern post but free to rotate, operated by a hand wheel and cables, and forcing by its rotation the thread, and with it the vertical tube, up or down. The two elevator flaps, hinged to the tail plane, are not connected to one another. The rudder has a balanced portion.

The 12-cylinder Rolls-Royce engine develops, according to the firm's plate on it, 300 hp. at 1,650 r.p.m., when the hourly consumption is 105 liters of gasoline and 4.5 liters of oil. The speed is not to exceed 1,800 r.p.m. In general arrangement

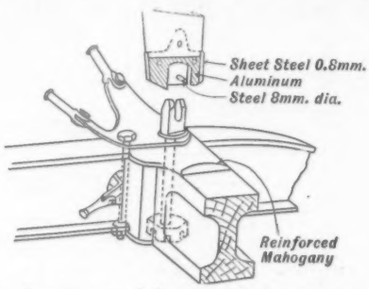

INTERPLANE STRUT ATTACHMENT

the engine is similar to older types of the same make, but it has four carbureters. The exhaust is either carried over the top plane or direct through short collectors slanting outwards from the body. The nose of the body is formed by a radiator fitted with shutters over its upper part. Through an opening

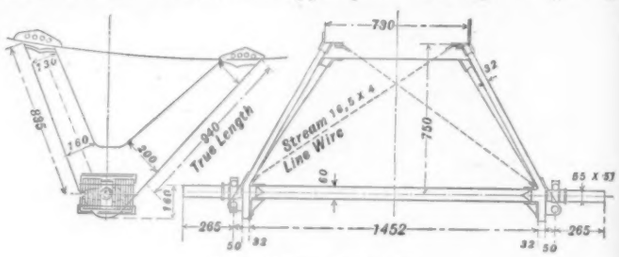

THE UNDERCARRIAGE

in the center of the radiator projects the reduction gear of the engine, which reduces the speed of the airscrew to 900 r.p.m.

Under the front of the body is placed transversely the oil

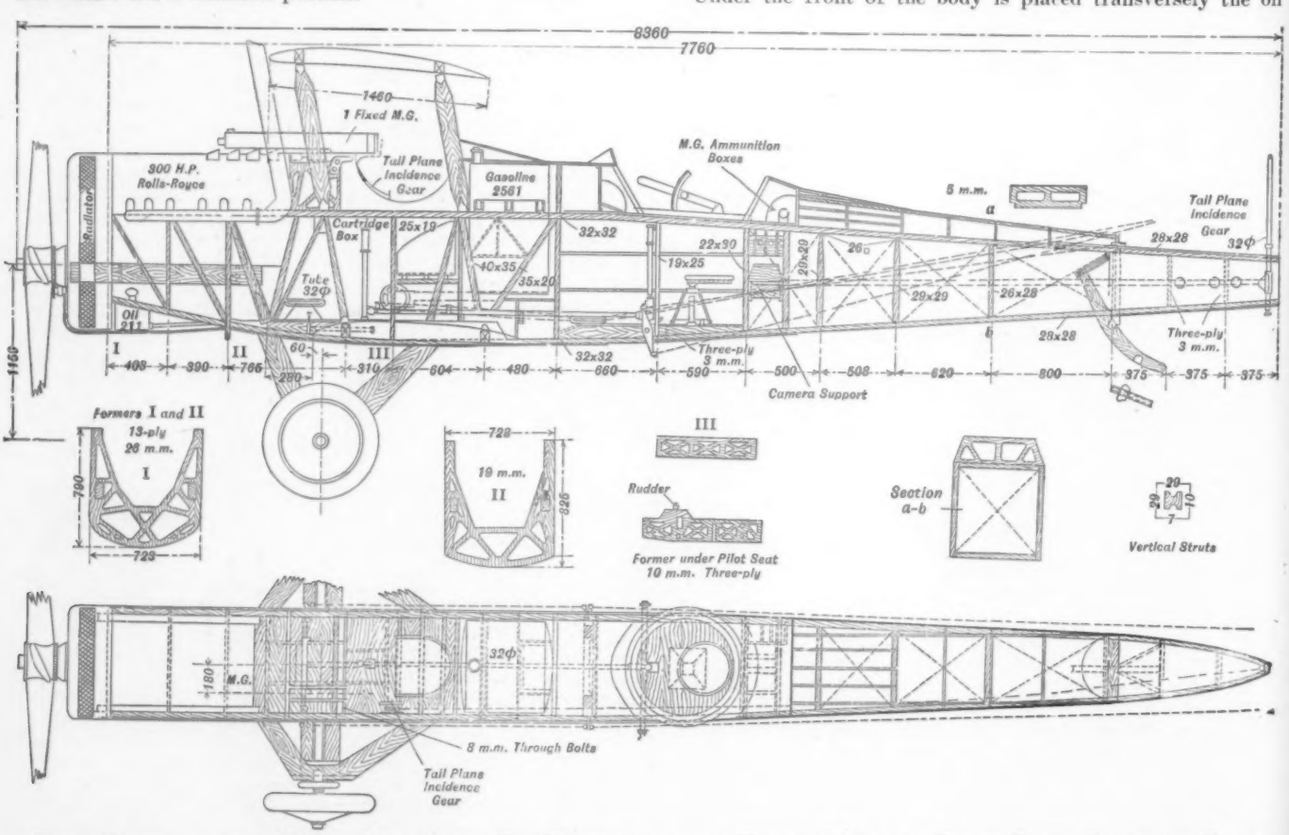

SCALE DRAWING OF THE BODY. WING AREA: TOP PLANE, INCLUDING FLAPS, 20.69 SQ.M.; LOWER PLANE, INCLUDING FLAPS, 19.62 SQ.M. TOTAL WING AREA: 40.31 SQ.M. AIRSCREW: DIAMETER, 2.66 M. BLADE WIDTH, 0.245 M. PITCH, 3.30 M. CONTENTS OF RADIATOR, 35 LITERS

tank, which has a capacity of 21 liters. The main gasoline tank, which is arranged for air pressure, has a capacity of 256 liters and is placed behind the pilot's seat. A gravity tank holding 28 liters is placed under the left top plane. Sufficient fuel is carried for a flight of about 2¾ hours' duration. In another machine there is an additional tank holding 76 liters, which brings the capacity up to about 3¾ hours.

More recent machines have, instead of the one pressure tank, and mounted in the same place, two tanks placed side by side, each of which is provided with a supply pump driven by a small propeller. With this arrangement a spring-loaded valve is provided inside the tank, which returns any surplus of gasoline to the tank. The two leads from the main tanks

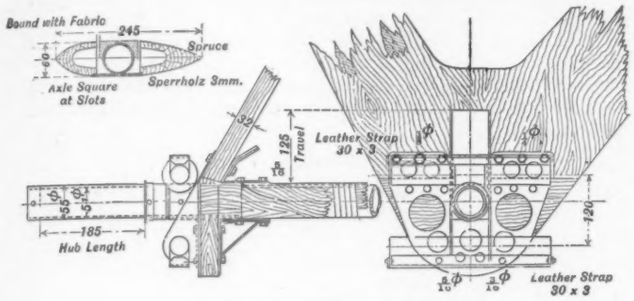

ARRANGEMENT OF AXLE

and that of the gravity tank are joined at the engine to an omnibus tube, to which is attached a manometer for controlling the tanks.

The machine is provided with complete dual control, the control lever of the observer being removable. The wing flaps are inter-connected, and their cables run on the outside of the wings along the leading edge. Each wing flap has two crank levers. The upper and lower flaps are connected by two streamline wires. In the same manner the elevator and rudder cables run on the outside of the body, the rudder cables being in duplicate, while each of the elevator flaps has single control cables.

The equipment of the pilot's and observer's cockpits differs in individual machines. On an instrument board in the former, provided with illumination for night flying, are the following instruments: speed indicator, revolution counter, altimeter, thermometer, clock, hand pressure pump, inclinometer, map board and compass. To the left of the pilot the various gasoline pipes are so arranged that the different cocks are within easy reach. On the same side are arranged oil and gasoline pressure indicators, a pressure pump, fed from the gravity tank, and also on a common axis the throttle, spark, advance lever, and mixture regulator for altitude work. On the throttle rods a catch lever is so arranged that when the throttle is closed the lever for regulating the mixture at altitudes will return with it. To the right of the pilot are arranged the cables controlling the radiator shutters, the switch for night illumination, and shelf for signal cartridges. Gasoline level indicators are not fitted.



BOMB SIGHT

In the observer's cockpit are placed: Speed indicator, altimeter, throttle and switch for night illumination. Observer's and pilot's cockpits are placed far apart on account of the main gasoline tanks being placed between them. For communication between the occupants there is a speaking tube on the right, and on the left an endless cable passing over rollers in the two cockpits. Behind the observer's seat is the mounting for the camera with adjoining shelves for the slides. The presence of a wireless outfit could not be ascertained in any of the machines.

The armament consists of two interconnected machine guns mounted on a turntable in the observer's cockpit, and of a fixed machine gun for the pilot mounted on the left of the top covering of the body. The control of the fixed machine gun is accomplished hydraulically by a control mechanism placed immediately behind the airscrew. This mechanism is driven off a pinion on the hub of the airscrew, and releases two shots for each revolution of the airscrew. Firing of the gun is accomplished from the control lever. A spring-controlled hand pump for filling the leads is mounted on the floor of the pilot's cockpit. For loading there is either a lever on the gun or a cable running over a roller, provided with a grip. A telescopic sight is placed to the right under the gun, in front of the rectangular wind screen. As the observer's seat is placed rather far aft, a good field of fire is also obtained from here in an outward and forward direction.

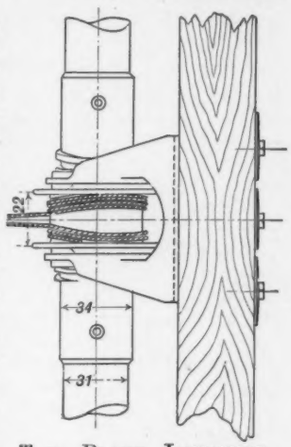

TAIL PLANE INCIDENCE GEAR

The bomb gear, judging from the makeshift way in which the release gear is built, appears to have been added as an afterthought. Bomb racks, either arranged for four smaller or for one large bomb, are placed under the lower wings and under the body. The release is accomplished from the pilot's seat by means of Bowden cable. The cables are either joined at the right of the seat or arranged separately on the outsides of the body. A sighting arrangement is built into the body immediately behind the rudder bar. It consists of a square plano-concave glass plate, 15 mm. thick at the edges and 5 mm. thick in the center. Underneath this are three wire rods soldered at right angles to a fourth rod lying in the direction of flight, while 17 cm. further down is another longitudinal rod, and a transverse rod working in longitudinal slots, which can be locked in place by screws.

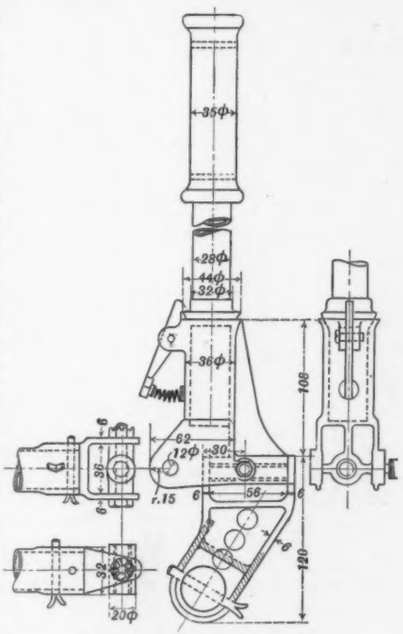

CONTROL LEVER IN THE OBSERVER'S COCKPIT

The weight of the machine empty, but including cooling water, was ascertained to be 1,110 kg. and the maximum useful load is assumed to be 590 kg.

Weights

	Kg.
Engine	390.0
Exhaust pipes	15.0
Radiator and water	76.9
Airscrew	42.0
Gasoline tanks	28.0
Oil tank	4.5
Engine accessories, leads, etc.	19.6
Body with cowl	175.0
Tail plane, incidence gear	2.5
Body accessories, seats, etc.	8.0
Undercarriage	54.0
Tail skid	5.0
Controls	9.5
Wings	209.0
Bracing	31.0
Armament supports	40.0
	1110.0

Loads

	Kg.
Crew	150.0
Armament	73.6
12 bombs, about	144.0
Photographic outfit	10.0
Wireless arrangement	5.0
Fuel	205.0
Estimated useful load	590.0
Weight of wings	5.2 kg. sq. m.

Determination of Permeability of Balloon Fabrics*

By Junius David Edwards

1—Introduction

One of the most essential characteristics of a balloon envelope is that it shall be gas tight, or nearly so. Therefore the determination of the permeability of balloon fabrics to hydrogen, which is the gas used in the modern dirigible and kite balloons, is of first importance in determining their suitability for balloon construction. In connection with a study of the permeability of balloon fabrics it has been necessary to investigate different forms of apparatus and the influence of experimental conditions in order to interpret test results intelligently. The results of the Bureau's investigation of methods of determining permeability are presented in this paper. The effect of composition, method of construction, etc., upon the permeability will not be discussed in the present paper, which deals only with testing methods.

A great many materials have been suggested for rendering fabric gas tight; the great majority of balloon envelopes, however, are made from rubber-coated silk or cotton, usually the latter. For the balloon envelope, two plies of cloth are used with the gas-tight rubber film between them. The two plies may be placed parallel to each other or one ply may be placed at an angle of 45 deg.; the biased fabric is supposed to offer greater resistance to tearing. Usually from 100 to 130 grams of rubber per square meter are placed between the plies. For protecting the fabric and the gas-retaining rubber film from the action of light, heat, moisture, etc., rubber coatings may be applied on the outside; further protection is sometimes added by coating the inside of the fabric also. Lighter single-ply fabrics are sometimes made for use in ballonets and three-ply fabrics find use in large dirigibles or supply balloons.

Goldbeater's skin finds some application in dirigible balloons of the rigid type. Oiled fabrics of various kinds, as well as fabrics coated with lacquers made from cellulose acetate or nitrate, have been tried. Various coatings have also been applied to rubberized fabrics with a view to rendering them more nearly gas tight and increasing their durability. However, none of these has been found entirely successful.

2—Theory of Permeability Process

Gas escapes from a balloon envelope through leaks at valves, seams, and imperfections in the fabric, and by passage through the fabric. Hydrogen might pass through the fabric by diffusion through minute holes in a manner similar to the passage of a gas through a porous plate or it might escape by solution in the rubber film with subsequent evaporation from the other side. As a matter of fact, both processes occur simultaneously. The escape of hydrogen through openings in the fabric is only a case of gas effusion, but the passage of hydrogen through the rubber of the fabric is a very different phenomenon.

Thomas Graham,[1] in 1866, investigated the flow of gases through rubber films and showed that it was a solution phenomenon and not a diffusion phenomenon. If gases passed through rubber films by diffusion through microscopic holes, their relative rates of escape should be approximately inversely proportional to the square roots of their densities. Graham showed, however, that the rates of penetration of different gases bore no relation to their density. He found the relative rates of penetration of rubber by different gases to be as follows:

Nitrogen	1.0
Methane	2.15
Oxygen	2.56
Hydrogen	5.50
Carbon dioxide	13.58

The rate of change of permeability of rubber films with change of temperature is also much greater than can be accounted for by the diffusion theory. These and other facts have shown that gases penetrate rubber by first dissolving in the rubber.

When a rubber-coated balloon fabric is placed in contact with hydrogen on one side and air on the other, the following process is substantially what occurs. Both the hydrogen and the oxygen and nitrogen of the air dissolve in the rubber film and tend to saturate it up to the limits determined by the temperature and by the partial pressure of each gas. Each gas penetrates the rubber film at its characteristic speed, and when it reaches the opposite side of the rubber film the gas evaporates from its solution in the rubber because the partial pressure of the gas in question is substantially zero. More of each gas is dissolved continuously on the first side of the fabric and a dynamic equilibrium is reached which continues so long as fresh air and fresh hydrogen are available at the two surfaces. In this manner hydrogen passes through the rubber to the air side and air passes through to the hydrogen side.

These facts will be discussed more fully in connection with the experimental work and their bearing on methods of test pointed out.

3—Methods of Determining Permeability

The permeability of a balloon fabric may be defined as the rate at which it is penetrated by a certain gas; except when stated otherwise, this gas is understood in this paper to be hydrogen. Permeability will be expressed in terms of liters of hydrogen per square meter per 24 hr., the volume of hydrogen being corrected to the standard conditions of 0 deg. C and 760 mm. mercury pressure.

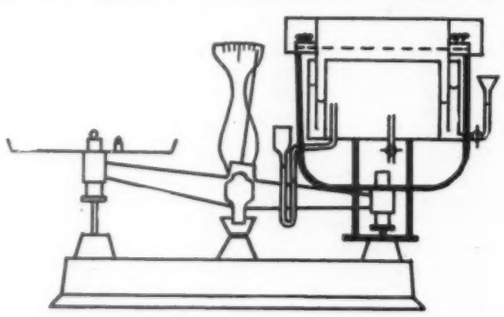

FIG. 1 RENARD-SURCOUF BALANCE

The methods in use for the determination of the permeability of balloon fabrics to hydrogen may be divided into two classes: (1) Methods which measure the rate of decrease in volume of a mass of hydrogen separated from the atmosphere by a definite area of the fabric; or (2) methods which measure by chemical or physical means the volume of hydrogen passing through a definite area of fabric in a given period.

The two methods may be characterized as the volume loss and penetration methods, respectively. According to the definition of permeability just given the volume-loss method does not measure the permeability of a fabric because in the volume-loss method the quantity measured is the volume of hydrogen escaping minus the volume of air passing into the hydrogen chamber. What it measures is the difference in the permeability of the fabric to hydrogen and air. Accordingly, any result obtained with this method will be characterized as the "volume-loss" permeability.

(*a*) *Volume-Loss Methods.*—The most widely used apparatus for applying the volume-loss method is known as the Renard-Surcouf balance. As shown in Fig. 1, it consists of the bell of a small gas holder mounted on one arm of a balance; the top of the bell is closed by the fabric (shown by a dotted line) under test. The bell moves up and down in an annular space filled with water; the annular container is attached to the base of the balance. The bell is first filled with hydrogen by alternately filling and emptying until the air has been displaced. The proper pressure is then obtained by adding weights to the opposite balance arm. As hydrogen escapes, the bell sinks, and the pointer moves over a calibrated scale indicating the volume loss. The apparatus should be kept in a constant temperature chamber.

Five other forms of apparatus of this class are described by Austerweil.[2] In each of these forms of apparatus a gas cham-

* Published by permission of the Director, Bureau of Standards.

[1] Phil. Mag., 32, p. 401: 1866.

[2] G. Austerweil, Die Angewandte Chemie in der Luftfahrt. Published by R. Oldenbourg, München, 1914.

ber filled with hydrogen is closed by the fabric under test. A graduated measuring tube is connected with this chamber and the volume of hydrogen escaping is measured by the volume of water necessary to replace it and maintain constant pressure. A leveling bottle may be used to introduce water into the measuring tube or it may be connected with a Mariotte flask which automatically introduces the water under constant pressure. If a leveling bottle is used, the pressure does not remain constant and must be adjusted at frequent intervals. The operating characteristics of this class of apparatus are discussed in section 6.

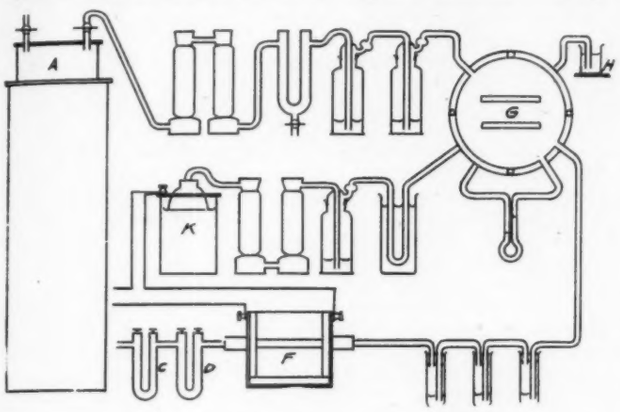

FIG. 2. APPARATUS OF BARR AND ROSENHAIN

(*b*) *Penetration Methods.*—The various forms of apparatus for applying the penetration method all employ a cell which is divided by the fabric into two chambers. In one of these chambers an atmosphere of hydrogen is maintained at a definite pressure. Through the other chamber is passed a stream of air which carries away the hydrogen as it penetrates the fabric. The amount of this hydrogen is determined by burning it to form water and weighing the water after absorption in some suitable medium, or the percentage of hydrogen is determined in the stream of air passing over the fabric by means of the gas interferometer.

The apparatus of Barr and Rosenhain,[3] as used in the National Physical Laboratory, is shown in Fig. 2. The hydrogen from the electrolytic cell *K* passes through a series of washing and drying tubes into the permeability cell *G* and out through the water seal *H*. The air from the gas holder *A* after passing through a series of washing and drying tubes passes over the other side of the fabric, then through another series of drying tubes, through an electric furnace *F*, where the hydrogen is burned, and finally through the absorption tubes *C* and *D* which are to be weighed. The permeability cell is kept in a constant temperature bath.

The apparatus described by Heyn[4] and used at the Physikalischen Reichsanstalt is similar in principle though differing in form and detail.

Frenzel[5] made a notable improvement in this method by employing a Rayleigh-Zeiss gas interferometer for determining the concentration of hydrogen in the air stream after passing over the fabric. From the percentage of hydrogen so determined and the rate at which the air was passing, as determined by a gas meter, the permeability was easily calculated.

4—Experimental Apparatus

In the investigation of different testing methods several forms of apparatus were employed. The most useful apparatus and the one employed in all routine testing work as well as most of the experimental work is shown in Fig. 3. It applies the penetration method and employs a gas interferometer for determining the hydrogen passing through the fabric.

In this apparatus, the fabric is held in the permeability cell *a*, maintained at constant temperature in an air or water bath *h*. Pure, dry hydrogen passes over one side of the fabric and out through a water seal *g*.

Air after passing through the wet-pressure regulator *c* and a length of capillary tubing to reduce pressure fluctuations, is dried by bubbling through concentrated sulphuric acid in *e* and then passed over the other side of the fabric through a drying tube d^1 and into one chamber of the interferometer. It passes out through the drying tube d^2, which prevents diffusion of water vapor into the interferometer and then through the saturator *f* filled with glass beads partly covered with water and then through the wet meter *m*. The saturator is employed to prevent loss of water from the meter by evaporation into the gas being measured. When the interferometer is being read, the air stream is by-passed through the cock *l* into the wet meter so as not to interrupt the flow of air through the permeability cell. The pressure on the air and hydrogen sides is measured by U-gages *i* filled with oil and water, respectively. Dry air is passed through the other chamber of the interferometer to serve as a comparison gas, or it may be passed through both chambers when it is desired to obtain the "zero reading" of the interferometer.

The gas interferometer and its uses have been described in detail by Haber and Lowe,[6] L. Stuckert,[7] L. H. Adams,[8] and others. The Rayleigh-Zeiss type of gas interferometer measures the difference in refractivity of two samples of gas contained in two gas chambers 100 cm long. Light from an illuminated slit passes through both chambers, after which the two beams combine to produce interference fringes which are observed through an eyepiece. The optical paths of the two beams can be brought to equality by tilting a glass compensator plate which is placed in the path of one of the beams. If the composition of the gas in one of the chambers is changed, the optical paths are different and the interference fringes are shifted. The fringes are brought back to their original position by tilting the compensator plate. The angle through which the compensator plate has been turned, which is measured by means of a drum attached to the micrometer screw, is a measure of the change in refractive index of the gas.

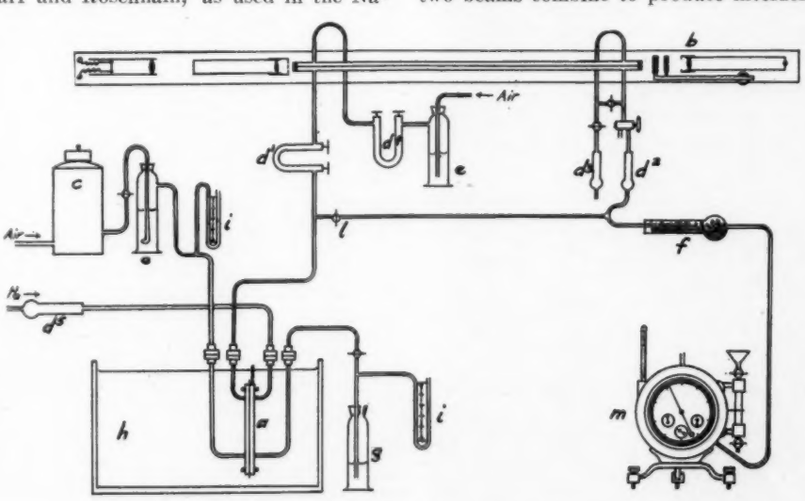

FIG. 3. DIAGRAM OF BUREAU OF STANDARDS APPARATUS

The instrument used for this work was of such sensitivity that one scale division indicated 0.01 per cent hydrogen in air when using air as a comparison gas.

The calibration of this instrument by a new method has been discussed by the author[9] in the Journal of the American

[3] Report of the British Advisory Committee for Aeronautics, p. 86, 1909-10.

[4] Sitz. der König. Akad. Wiss., p. 365, 1911.

[5] "Uber die Gasdurchlässigkeit der Gummierten Ballonstoffe." Zs. fur Flugtechnik und Motorluftschiffahrt, 5, p. 264, 1914.

[6] Haber and Lowe, Zs. f. Angew. Chem. 23, p. 1393; 1910.

[7] Stuckert, Zs. f. Elektrochemie, 16, p. 37; 1910.

[8] L. H. Adams, J. Am. Chem. Soc., 37, p. 1181; 1915.

[9] Edwards, J. Am. Chem. Soc., 39, p. 2382; 1917.

Chemical Society. The interferometer furnishes a rapid and accurate method of determining the amount of hydrogen penetrating the fabric. Its many advantages will be pointed out in connection with the various subjects discussed in succeeding sections.

The permeability cells used are shown in greater detail in Fig. 4. The cell adopted as standard had a fabric area of 250 cm²; other cells having areas of 1000, 100, 50 and 25

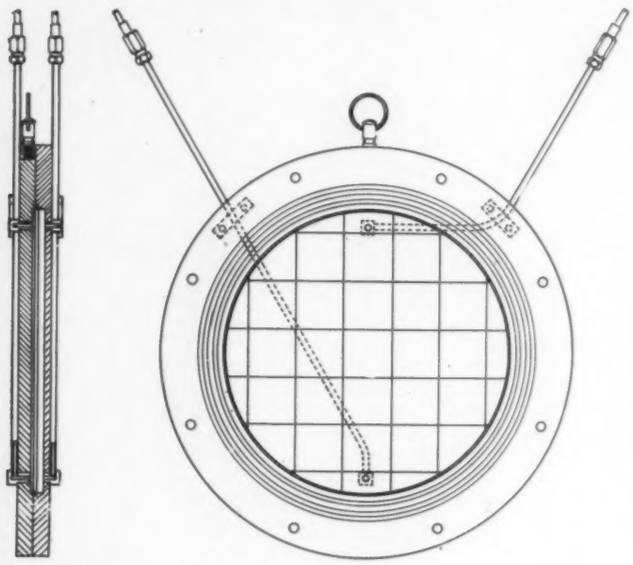

FIG. 4. BUREAU OF STANDARDS PERMEABILITY CELL

cm² were constructed for experimental purposes. In designing these cells the gas and air chambers were kept small in volume in order to reduce the space which must be swept out when operating. A large mesh-wire screen (3 cm. openings) kept the fabric from being pressed against the back of the air chamber by the pressure of the hydrogen. The flanges of the cell contain a number of very fine grooves which take up the excess of grease used to make the fabric gas tight; they also give a better grip on the fabric. The two halves of the cell are held together by bolts and wing nuts (not shown in figure).

Connections to the gas and air lines and interferometer were made with small metal unions, and copper and glass tubing was used in making the connections to the various parts of the apparatus where necessary.

5—*Effect of Experimental Conditions on Apparent Permeability*

In order to interpret tests made under different conditions and with different apparatus, the effect of experimental conditions on the apparent permeability was investigated. The apparatus shown in Fig. 3, with various modifications, was used for all the work reported in this section. The general conclusions reached are applicable to all apparatus of this type whether the hydrogen is determined by combustion or by use of an interferometer; the operating detail of the apparatus, however, may be quite different. The interferometer was used in preference to the combustion method because it greatly facilitated the testing work in point of speed and accuracy and permitted the carrying out of certain experiments which would otherwise have been impossible of execution.

(*a*) *Effect of Temperature on Permeability.*—It has been known for a long time that the permeability of rubber films increases rapidly with increase of temperature.[10] For this reason it is necessary in all accurate work to maintain the fabric at a constant temperature during the period of test.

The rate of change of permeability with change of temperature for a number of different fabrics is shown in Fig. 5. In determining these curves the cell containing the fabric was mounted in an air bath, which was maintained at the desired temperature by means of an electric heater controlled by a thermostat. The fabric was allowed to come to equilibrium and its permeability determined at each temperature before changing to the next temperature. Curves 10449, 10451 and 10650 show the temperature coefficients of fabrics from three American manufacturers and curve 10568 is for a fabric of foreign manufacture. These curves are all very similar in shape, indicating that, approximately at least, the same relation between permeability and temperature holds for fabrics of quite different composition. For purposes of comparison, another curve showing the change of permeability with temperature as determined by other experimenters is included. This curve *A* is taken from the report of Gibbons and Smith[11]; it shows substantial agreement with the Bureau's results. Frenzel[12] gives graphs for four continental balloon fabrics. They show a smaller rate of change than any of the preceding curves and indicate the change of permeability to be a linear function. None of the fabrics examined by this Bureau have shown a linear relation between temperature and permeability. Communications from private testing laboratories here and abroad show temperature effects corresponding to those obtained at the Bureau and do not indicate a linear relation. Two tests at two different temperatures by Rosenhain and Barr[13] indicate a somewhat more rapid increase of permeability with increase of temperature. Their data are insufficient to warrant any general conclusions, however.

In order to make the tests comparable, the Bureau of Standards has adopted the practice of making all tests at a standard temperature of 25° C. This temperature was adopted because of the ease and convenience with which the testing apparatus could be maintained at this temperature, and because it was thought to represent with some degree of approximation an average balloon temperature.

The National Physical Laboratory, England, has adopted 15.5° C (60° F) as its standard temperature. That temperature cannot be maintained in most American testing laboratories in summer without refrigeration, which needlessly complicates the testing. The customary practice in France is to use 15° C as the standard temperature. However, temperature control of the Renard-Sureouf balance, which is the most widely used instrument there, is rather difficult, and it is not known what degree of uniformity there is in temperature control in French practice. For the purpose of approximate comparisons, the permeability of the average rubberized fabric at 15° C may be taken as 65 per cent of the permeability at 25° C.

(*b*) *Effect of Pressure on Permeability.*—It has been customary, both here and abroad, to determine the permeability of balloon fabrics under a pressure of hydrogen equivalent to 30 mm. of water. This is approximately the normal working pressure of a non-rigid balloon.

The pressure coefficient for two-ply balloon fabrics has been found to be rather small. The rate of change of permeability with change of hydrogen pressure for three fabrics is shown in Fig. 6. The change in permeability with change in pressure is very small, above 50 or 60 mm. the curve being almost horizontal. The greater effect of pressure change at low pressures may be due, as suggested by Frenzel, to the fact that the initial increases of pressure stretch both the rubber film and the supporting fabric, but the point is soon reached where further stretch of the rubber film is prevented by the relatively inelastic fabric, and thereafter the permeability shows only a very small change. The effect of pressure as well as of temperature varies somewhat with different fabrics, but with those tested it was small. This is to be expected, since an increase of hydrogen pressure of 10 mm. of water (0.74 mm. of mercury) means an increase of only about 0.1 per cent in the total pressure of the hydrogen.

Since the permeability is approximately proportional to the partial pressure of hydrogen, the permeability should vary with the atmospheric pressure, because the partial pressure of the hydrogen is equal to the atmospheric pressure plus the constant excess pressure under which it is confined in the cell. However, the changes in barometric pressure are usually small, seldom more than 1.5 per cent; accordingly, they have been neglected in routine testing since their effect upon permeability, as far as can be ascertained from an examination of test results, is within the limits of experimental error. It should be noted that it is the excess gas pressure above atmospheric

[10] Graham, Phil. Mag., 32, p. 401; 1866.

[11] First Annual Report of the National Advisory Committee for Aeronautics (Washington, 1915), p. 171.

[12] Frenzel. "Uber die Gasdurchlässigkeit der Ballonstoffe." Druckerei des Elsässichen Textilblattes im Gebweiler.

[13] Report, Great Britain Committee on Aeronautics, p. 60; 1910-11.

which produces the greatest part of the increase noted at the beginning of the curves shown in Fig. 6.

(*c*) *Effect of Humidity of Hydrogen and Air*—The influence of moisture upon the permeability was determined by

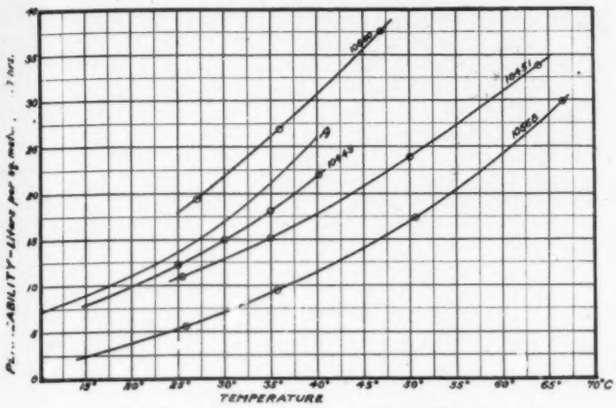

FIG. 5. EFFECT OF PRESSURE ON PERMEABILITY

comparing the permeability shown when using dry hydrogen and air with the permeability when using moist hydrogen and air. When dry gas was to be used, it was passed through concentrated sulphuric acid; when moist gas was employed, it was passed through sulphuric acid of such concentration that the relative humidity of the saturated gas was approximately 65 per cent at 25° C.

The permeability of a fabric was determined with dry gas and then with moist gas; the order was then reversed. The same difference was noted in each case when testing under the two different conditions. The average results of these tests are given in Table 1:

TABLE 1.—EFFECT OF HUMIDITY OF HYDRCGEN AND AIR ON PERMEABILITY

Order of test	Condition of hydrogen and air	Permeability, liters per square meter per 24 hours	Difference
First test	Wet	13.8	...
Second test	Dry	14.4	0.6
First test	Dry	15.1	...
Second test	Wet	14.5	0.6
First test	Wet	13.7	...
Second test	Dry	14.5	0.8
First test	Dry	14.6	...
Second test	Wet	13.9	0.7

When the hydrogen is 65 per cent saturated at 25° C there is approximately a 2 per cent decrease in the partial pressure of the hydrogen due to the addition of water vapor. This partially explains why a 4 to 5 per cent decrease in permeability was noted when changing from dry gas to wet gas. The amount of water dissolved in the rubber probably also influences the rate of penetration of the rubber by the hydrogen.

Tests showed that the moisture contained in the fabric was not completely removed by a current of dry air at 25° C after a number of hours' passage, so that it is certain that the rubber compounds under the conditions of test with dry gas still contain an appreciable amount of water vapor.

No further experiments on the effect of moisture were made, since it was evident that the difference in permeability under the two conditions of test was small—less than 1 liter in this case. For testing purposes the conditions of test which are recommended should be easily obtained and duplicated, and it is obvious that the use of dry hydrogen and air is most satisfactory in every respect. It does not introduce further complications in calculations and testing, and gives results very close to those obtained with partially saturated gas.

(*d*) *Effect of Volatile Substances in Fabric.*—The apparent permeability may be affected by the removal of volatile substances from the fabric by the current of air passing over it. There may be present in the air stream after passing over the fabric varying amounts of water vapor, carbon dioxide, or the vapor of benzol, gasoline, or other solvent used in the manufacture, in addition to the hydrogen which has penetrated the fabric. The water vapor and carbon dioxide which may have been dissolved in the rubber are removed by soda lime and calcium chloride before the air stream enters the interferometer. In case the combustion method is used, only the water vapor need be absorbed.

The presence of vapor of solvents, however, introduces a possible serious source of error into either method. If the hydrogen is estimated by use of the interferometer, the apparent permeability is too low, because the refractivity of solvent naphtha or benzol is higher than the refractivity of air or hydrogen. If the combustion method is used, the results are too high by the amount of water formed by the combustion of the solvent. This point should be carefully considered when testing fabrics of very recent manufacture, and it is of great importance in the commercial control of fabric manufacture. It is usually assumed that the solvent used in the rubber coatings when they are spread is entirely removed by the subsequent heating and curing. In some cases, notably three-ply fabrics with heavy rubber coatings, sufficient solvent may be

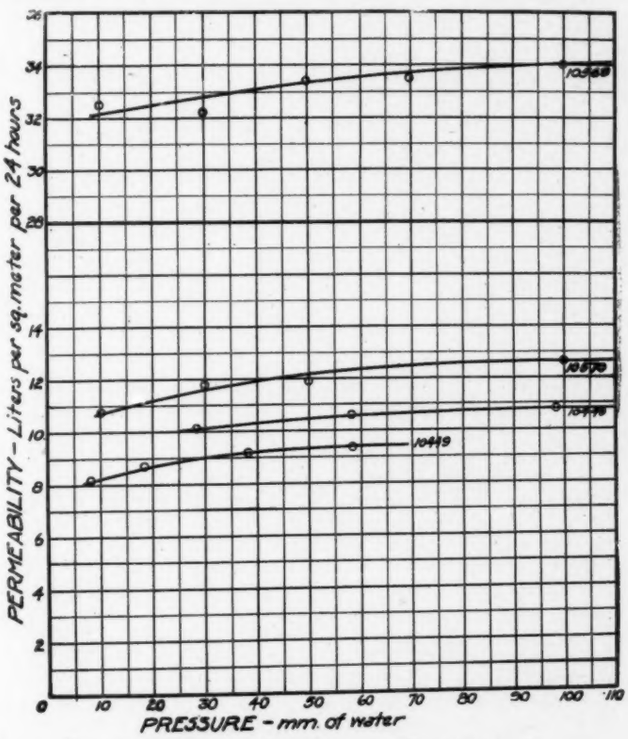

FIG. 6. EFFECT OF PRESSURE ON PERMEABILITY

left to seriously vitiate test results unless it is removed or corrected for. Its presence can usually be detected from the odor of the fabric.

The necessary correction for solvent vapor can be readily found by determining the reading of the interferometer when using air in place of hydrogen in the permeability cell. Since the amount of solvent given off by the fabric decreases with time, it is necessary to take at least three readings at short intervals to determine the rate of change of the blank; the correction at the time of the permeability test, which should follow immediately, is estimated by extrapolation. This method does not necessitate waiting for the complete removal of the solvent before beginning the test, and for most purposes is sufficiently accurate. It is of course obvious that a more accurate method would be to wait until the solvent is completely removed, thus eliminating the necessity for a blank correction.

The estimation of the blank correction is more difficult in case the combustion method is used, because it is impracticable to determine its rate of change. Its magnitude may be determined, however, and if a more accurate determination is required, a number of permeability tests can be made at suitable intervals.

Of several hundred samples tested at the Bureau only fabrics of a certain composition have shown blanks of appreciable magnitude. The possibility should not be overlooked, however, in the case of any fabric with heavy rubber coating and of very recent manufacture, particularly if the presence of solvent can be detected by the odor.

(To be concluded)

The Roland D.II Biplane*

This single-seater pursuit biplane made its first appearance on the Western front in March, 1917, and is still being used to some extent by the enemy, particularly on the Eastern sectors. A description of this machine, therefore, appears to be of timely interest.

The overall dimensions of the Roland D.II biplane are rather small, as may be seen from the following table:

Span of upper wings	8.90 m.
Span of lower wings	8.50 m.
Overall length	6.95 m.
Overall height	2.95 m.

Its weight, gross, that is, fully loaded, is 827 kg., which is slightly greater than that of the Albatros D.III pursuit biplane. The wing area being 23 sq. m., the wing loading consequently is 36 kg. per sq. m.

The Body—The construction and shape of the body deserve special attention. The body is of the monocoque type and of

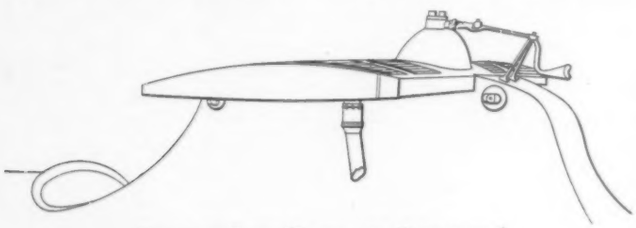

VIEW OF BODY RIDGE AND RADIATORS

oval cross-section, which ends at the rear in a vertical knife-edge. The construction is throughout excessively light, the body being built up of thin longitudinals bent to suit the curvature of the stream-line, and light bulkheads, only four of which are situated between the pilot cockpit and the tail.

As a matter of fact, the longitudinals act only in the capacity of stringers or distance pieces, for the body derives its rigidity entirely from its plating of veneer; this is built in two halves and is joined at the top and bottom of the body. The veneer plating consists of six-ply wood and is covered on its outer side with fabric; its total thickness is only 1.5 mm.

Between the pilot cockpit and the engine the body is tapered out upward until it forms a vertical ridge of 0.11 m. width, to which the upper wings are attached. The latter are partly hollowed out in the center for letting in the radiator. The lower wings are attached to wing roots integrally built with the body. A wooden tail skid, steel-shod, is fixed at the rear end of the body, its hinge being protected by a steel sheet casing.

The pilot is seated very high in the body, but even so his field of vision is not very good, because it is divided by the central ridge.

The Wings—The wings are of trapezoidal shape, without stagger or dihedral, but have a sweepback of 1½ deg. The upper and lower wings have both a chord of 1.45 m., and the gap is throughout the entire span 1.34 m.

The ribs are set perpendicular to the leading edge, and, as both members of a pair of interplane struts are attached to the same rib, it follows that, owing to the sweepback of the wings, the two struts of each pair are offset relative to the axis of flight.

The upper wings are built up of two spruce spars, situated 0.83 m. from one another, the front spar being 0.13 m. from the leading edge, and twelve ribs of gray poplar, with ash flanges. The ribs are spaced 0.37 m. and are divided by false ribs of 10 mm. thickness, which are fixed between the leading edge and the rear spar. Four compression members of steel tubing are fitted between the front and rear spars and are spaced 1.30 m. The inter-spar wiring consists of 3 mm. piano wire, and the steel tubes are 25 mm. in diameter. The wing structure is further strengthened by suitable wooden corner blocks and stout fabric straps, which alternately pass over and under the ribs; two of these straps are carried between the

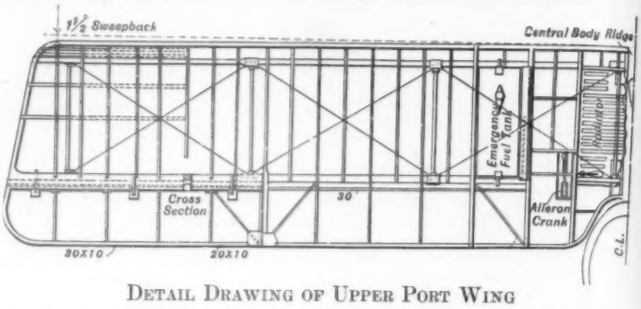

DETAIL DRAWING OF UPPER PORT WING

leading edge and the front spar, and two more are situated between the wing spars.

Non-balanced ailerons are carried on the upper wings; the aileron hinges are protected by a covering of veneer, which is fixed underneath the wing fabric. At its leading edge, that is, near the rear wing spar, the aileron has a span of 1.82 m. and a chord of 0.42 m. The aileron axle is a tube of 30 mm. diameter. The aileron cranks are operated by vertical, tubular rods, like on the Nieuport scout.

Q. D. WING BOLT

Besides the radiator, which is inset in the center portion of the upper wings, as has been said before, an emergency tank, conforming in shape to the wing curve, is carried on the upper port wing.

The upper wings are fixed to the peak of the body ridge, which supersedes on this machine the classic cabane, by means of quick detachable bolts of a system similar to that used in the L. V. G. model C.IV biplane.†

The framework of the lower wings is similar to that of the upper wings; the spacing of the wing spars is the same, but there are only ten ribs, nine of which are 10 mm. wide, while the tenth, nearest to the tips, is 25 mm. wide. The same false ribs, of 10 mm. width, occur here as on the upper wings, and the wire bracing is also the same, but the tubular compression struts between the wing spars are of smaller cross-section and are spaced differently. The outermost tube is 20 mm. in section, while the three remaining compression members are 25 mm. tubes; counting from the wing tips these tubes are spaced 1.17 m., 1.13 m. and 1.11 m., respectively. As has been said before, the lower wings are attached to wing roots built out of the body.

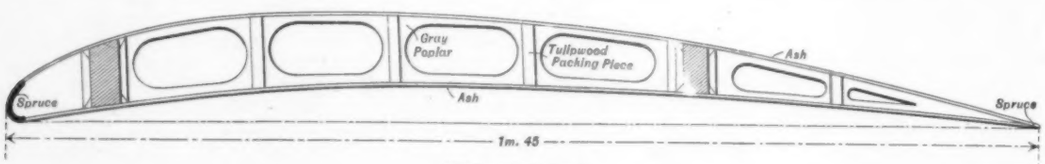

WING SECTION

Both wings are slightly washed out, the angle of incidence being 4 deg. at the second rib and 3 deg. at the seventh rib.

The interplane struts are constituted of 25 mm. steel tubes stream-lined with wooden fairings, their depth being thus brought up to 90 mm.

The Tail—The tail has, roughly, a trapezoidal outline, with, at the rear end, a triangular cut-out for affording play to the rudder. The framework of the stabilizer is of wood, while that of the elevators is constituted of steel tubing. The elevators are balanced by triangular portions.

* Translated from *L'Aérophile*.

† See the June 15, 1918, issue of AVIATION.

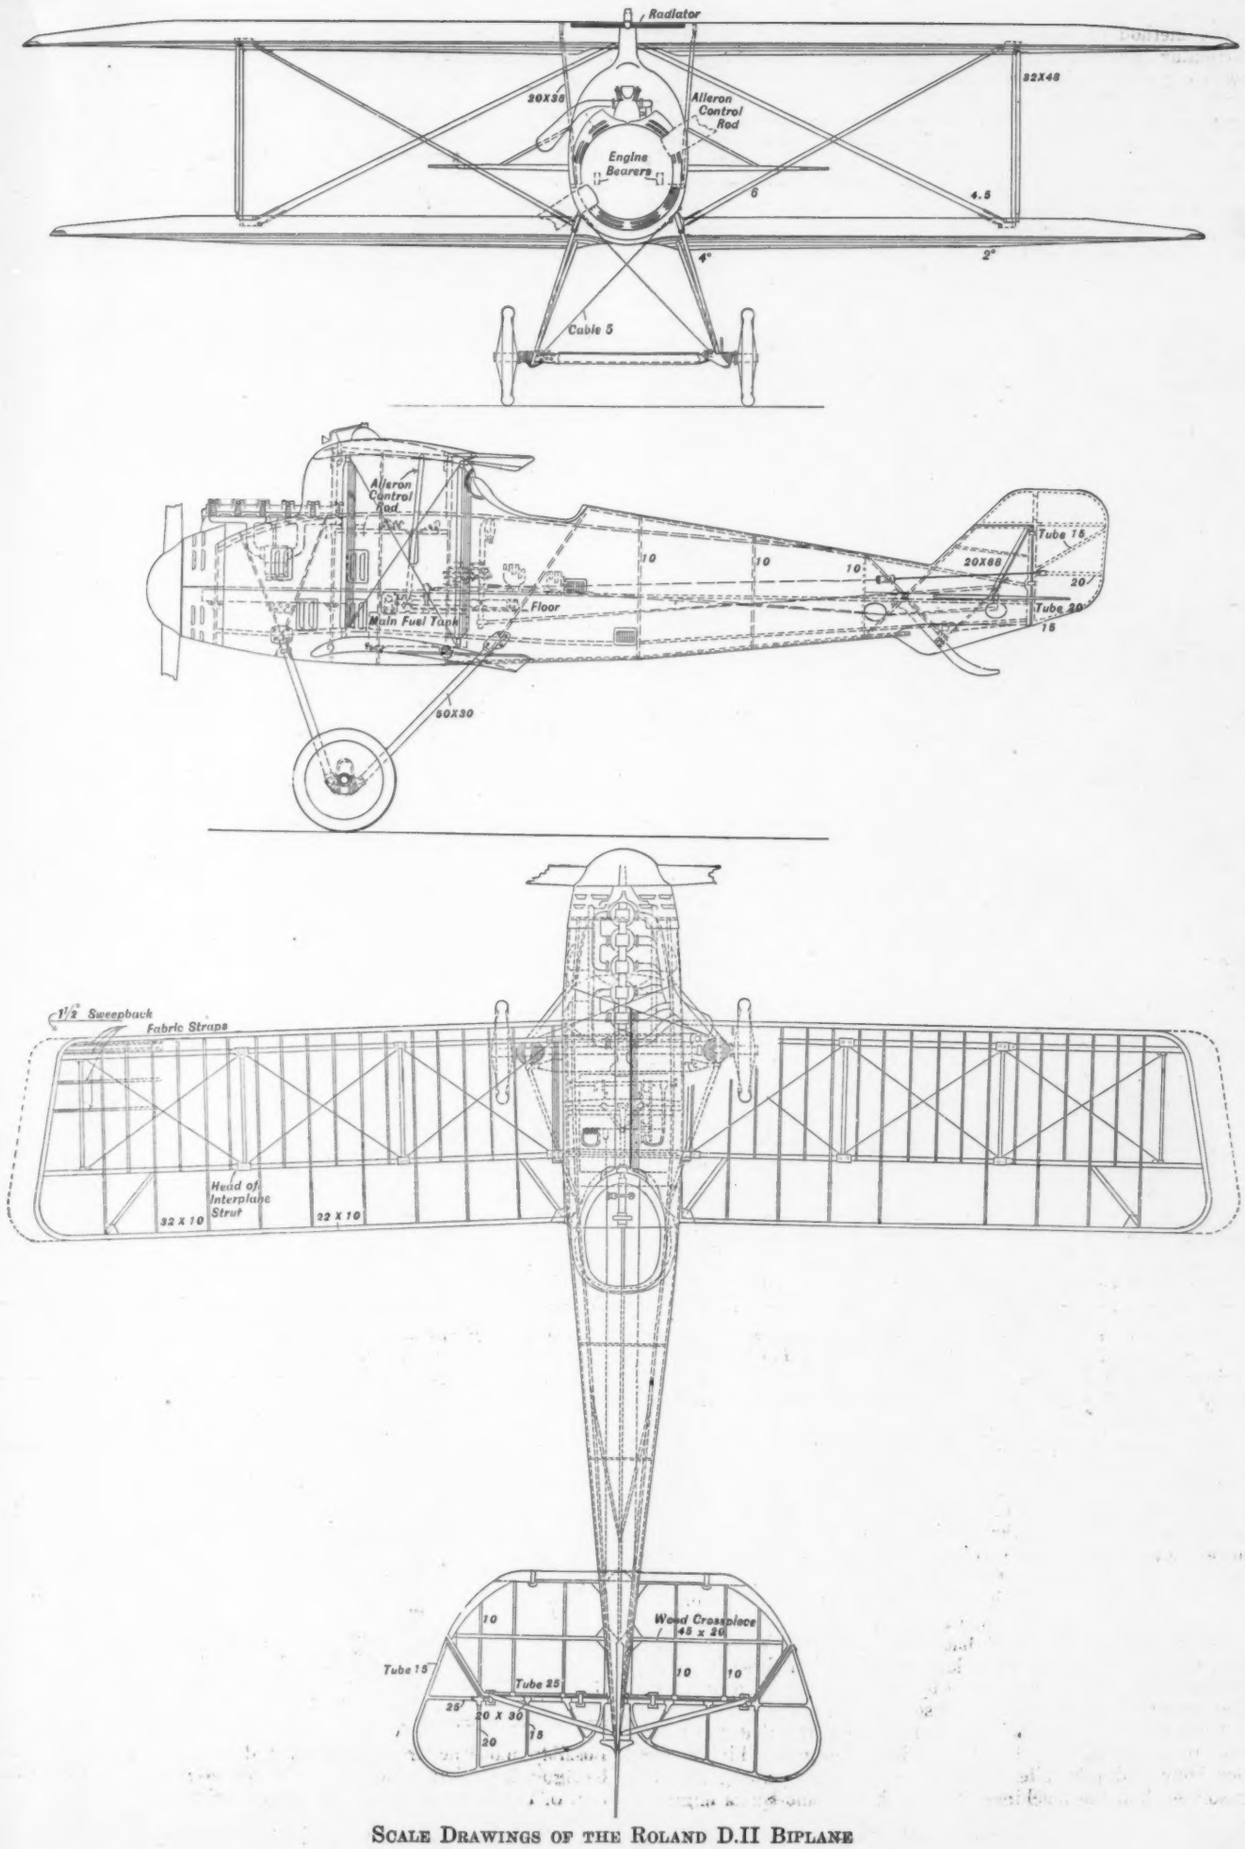

SCALE DRAWINGS OF THE ROLAND D.II BIPLANE

The method of attachment of the tail plane is worthy of particular interest; the leading edge of the stabilizer is hollowed out and fits into a horizontal cross-piece which is fixed inside of the body, and extends 0.50 m. on either side. This arrangement imparts to the tail plane a great amount of rigidity, which is further increased by two tubular struts which brace the trailing edge of the stabilizer to the stern post.

The vertical fin is built integrally with the body and is, as the latter, covered with veneer plating. The rudder embodies a triangular balanced portion, and is built up of light steel tubing. The control cables are carried inside of the body up to a point about 1 m. from the stern post.

The Power Plant—The engine is a 6-cylinder, 160 hp. Mercedes, which is fitted with a horizontal exhaust collector, carried on the starboard side. In addition to the emergency tank above mentioned, which is carried on the upper port wing, a main fuel tank is fitted underneath the rudder bar. On the model examined the airscrew was broken and could not, therefore, be identified; it was fitted with a spinner.

Armament—This consists of two Spandau machine guns, which are synchronized with the engine. They are mounted on either side of the latter, and are, but for their extremities, entirely covered by the central ridge of the body.

Undercarriage—The undercarriage is of the V-type, with a continuous axle, which is sprung by Sandows and is carried in a stream-line casing. The V-struts are steel tubes, which abut on the body against the base of two inclined body bulkheads. The track is 1.75 m., and the wheels are 760 x 100.

It is said of the Roland D.II that its very light construction often causes a distortion of the body, and that, furthermore, it easily gets into a tail spin. As no official trials have so far been made in France with this machine, one must rely upon the judgment of the aviators who have fought it to gather an opinion on the flight performances of the Roland D.II. It thus appears that this machine is listed among the best enemy pursuit machines, and though its conception, entirely novel at the time, dates back to over a year, the Roland D.II is still employed in certain enemy pursuit squadrons.

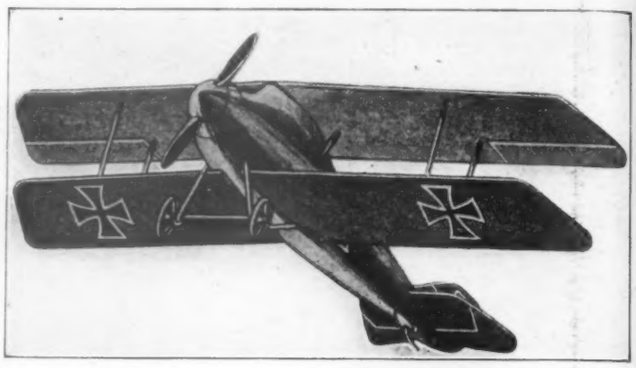

THREE-QUARTER FRONT VIEW

Cost of the Air Mail Service

The first tabulated report on the operation and maintenance of the air mail service has just been released by Otto Praeger, second assistant postmaster-general, and is printed in the accompanying tables. The report covers the period from the start of the service, on May 15, to the end of that month.

As may be seen in Table I, nine airplanes were at the time employed in the service, the first six being Curtiss JN-4H machines, fitted with 150 hp. Hispano-Suiza engines, while the three last were Curtiss R-4 biplanes fitted with 350 hp. Liberty engines. Since all these machines are the property of the Army Air Service, the Post Office authorities have no information as to their cost.

In the report no account is taken of the very important item of depreciation because no convincing data are said to be available on this subject, nor are any data furnished concerning the wear to which the machines have been subjected or their age at the time of starting the service. The items of rent, light, power, miscellaneous expenditures, dead time of pilots and hangar men, shop time of mechanics and departmental overhead charges, all of which are not directly apportionable to individual machines, are prorated equally between all airplanes. Whether it would have been more satisfactory for determining the actual work done to apportion these items in proportion to the mileage made by each machine is a question that only cost accountants could settle.

With reference to Table II, it may be noted that the three mail planes fitted with Liberty engines averaged a higher cost per hour and per mile, with lower miles run per gallon of gasoline, than the machines fitted with Hispano-Suiza engines. This was, of course, to be expected, since the Curtiss R-4 is a much larger machine than the JN-4H model, and the Liberty-12 is much more powerful than the 150 hp. Hispano-Suiza.

A careful study of the appended tables may develop many interesting points, and should give to those interested in the development of commercial aeronautics the first reliable data on which to base the cost of operating an air mail service.

TABLE I

Airplane No.	Gas	Grease and Oil	Office Force	Motor Cycles, Trucks	Rent, Light, Fuel, Power, Telephone, and Water	Misc.	Pilots		Hangar Men		Mechanics		Repairs and Accessories	Interest on Investment	Departmental Overhead Charge	Total
							Actual Time	Dead Time	On Plane	Miscellaneous	On Plane	Shop Time				
37994	$15.75	$2.71	$11.73	$12.40	$22.06	$2.66	$26.68	$21.73	$8.35	$9.72	$102.20	$9.72	$9.77	$27.56	$16.66	$229.70
38262	20.32	4.79	11.73	12.40	22.06	2.66	16.92	21.73	1.99	9.72	21.87	9.72	125.50	27.56	16.66	325.63
38274	75.13	21.83	11.73	12.40	22.06	2.66	73.32	21.73	2.00	9.72	140.12	9.72	11.05	27.56	16.66	457.69
38275	77.49	25.48	11.73	12.40	22.06	2.66	68.70	21.73	1.87	9.72	167.05	9.72	142.72	27.56	16.66	617.55
38276	54.57	10.22	11.73	12.39	22.06	2.66	66.30	21.73	1.87	9.72	152.43	9.72	27.89	27.56	16.66	447.51
38278	73.83	20.48	11.73	12.39	22.06	2.66	96.25	21.73	18.07	9.72	352.47	9.72	51.78	27.56	16.66	747.11
39365	27.90	5.58	11.73	12.39	22.07	2.66	14.54	21.74	6.73	9.72	68.98	9.72	5.42	27.56	16.66	263.40
39366	37.50	2.50	11.73	12.39	22.07	2.67	23.42	21.74	3.49	9.73	90.06	9.73	16.52	27.56	16.66	307.77
39367	22.80	4.28	11.72	12.39	22.07	2.67	13.27	21.74	1.87	9.73	34.97	9.73	4.22	27.57	16.72	215.75
Totals.	$405.29	$97.87	$105.56	$111.55	$198.57	$23.96	$399.40	$195.60	$46.24	$87.50	$1130.15	$87.50	$394.87	$248.05	$150.00	$3682.11

It will be of special interest to the Post Office authorities if readers of AVIATION AND AERONAUTICAL ENGINEERING will make suggestions as to how cost data may be expressed in a possibly more accurate manner, and how depreciation should be figured, so that a more truthful representation of the actual cost of commercial air mileage may be obtained.

TABLE II.
SERVICE AND UNIT COST.

Airplane No.	Gal. of Gas.	Total time run		Total miles run.	Miles run per gal. of gas.	Cost per hour.	Cost per mile.
		hr.	min.				
37994	62	7	19	550	8.88	$40.96	$.5449
38262	71	11	56	239	3.38	27.28	1.3624
38274	258	19	50	1365	5.29	23.08	.3353
38275	262	19	24	1247	4.75	31.83	.4952
38276	105	15	40	1024	5.52	28.56	.4370
38278	245	26	40	1719	7.01	28.01	.4346
39365	93	3	00	280	3.01	87.80	.9407
39366	125	6	28	540	4.32	47.59	.5699
39367	76	2	51	270	3.55	75.70	.7990
Totals....	1377	113	8	7234	5.25	$32.54	$.5090

Skilled Workmen May Be Retained

The Government is coming to the assistance of contractors on aircraft manufacture by enabling them to retain the services of skilled workmen who may have been drafted or who enlisted. As the labor shortage is now one of the most difficult problems facing both the Government and the manufacturers the following letters and forms will be found of not a little importance to all persons engaged in aircraft production:

WAR DEPARTMENT
OFFICE OF DIRECTOR OF AIRCRAFT PRODUCTION, WASHINGTON
Personnel Department

From: Office of the Director of Aircraft Production.
To: All Contractors.
Subject: Loss of skilled men by draft or enlistment.

1. For the purpose of assisting this office to cooperate with you in your labor problems, you are requested to fill out and return, at your earliest convenience, Forms FRI-11 and 11-a enclosed.

2. It is believed that the forms are self-explanatory. You are advised, however, that indefinite furloughs can probably be obtained for any of your skilled or technical employes heretofore drafted, in accordance with the explanation provided on Form 5 also enclosed. You are requested to bring this matter to the attention of all your sub-contractors and to cause them to communicate with this office if they desire.

Please note that in addition to checking on Forms 11 and 11-a the names of men whose return is desired, you must also fill out complete application blank in each case, as per sample attached. Additional application blanks will be sent you on receipt of a request for a stated number. When requesting such blanks, please bear in mind that an original and two copies must be furnished this office in each separate case.

4. Frequent report is made to this office through Recruit Depots in various parts of the country that skilled workmen have been drafted without a request for their release or furlough having been made by their employers. Such men can be furloughed and assigned to any plant in need of men of their respective qualifications. It is requested that you advise this office if, in the event that the names of any such men are ascertained, they may be furloughed and ordered to report for duty to you and if you are prepared to receive and give them employment on short notice. It must be borne in mind that this office cannot concern itself with the comparative excellence of the men; but it is believed that in view of the existing shortage of labor, you may be in a position to employ, without reservation, such skilled men as may be available in this manner.

Form FRI-5—Indefinite Furloughs

WAR DEPARTMENT
BUREAU OF AIRCRAFT PRODUCTION, WASHINGTON
Personnel Department

From: Office of the Director of Aircraft Production.
To: .....
Subject: Return of employees to necessary industry.

1. In reference to your communication of ..... you are advised that it is now impracticable for this office (formerly the Equipment Division of the Signal Corps) to take action to secure deferred classification for any of your employees.

2. In the event, however, that any of your skilled or technical employees are actually drafted and inducted into service, their return to you may be obtained in accordance with the following procedure.

3. Separate application for each employee must be forwarded in triplicate (i. e. one original and two carbons including all signatures) on Form FRI-1, of which a supply is furnished herewith. This application must be checked and verified by a representative of this Bureau (i. e. a Government Inspector or commissioned officer at or near your plant) or, if this is impossible, by a city, county or state official having knowledge of the facts.

4. This application should be forwarded to this office as soon as you know the camp or recruit depot to which the individual concerned has been sent; and no action will be taken on any application in which the exact location of the man is not accurately stated. You should arrange to have the man furnish you this information by telegraph, if necessary, at the earliest possible moment.

5. An indefinite furlough without pay or allowances will then be requested for the man concerned and if this is granted, the man will be ordered to report to you to resume his former occupation. He may wear the uniform if he so desires, or may wear civilian clothing, but in either case he will be paid and treated in all respects by you as though he had never been drafted.

6. The Adjutant General's Office will notify you the day the man's Commanding Officer is instructed to furlough him. Telegraphic report must be made to this office on the day on which each such furloughed man reports to you. The form of this telegram will be "(full name of man) on furlough reported for duty today (name of organization)."

7. On the last day of each subsequent month, a further report must be made by you to this office as to the continuation and character of each such furloughed man's employment. Forms for this report will be furnished you. Failure to make the report will result in the immediate termination of the furlough.

8. If, at any time, any employee so furloughed and returned to you leaves his employment or ceases to be indispensable, you will instantly telegraph this office, the Commanding General of your department and Office of The Adjutant General of the Army, Washington, D. C., as follows:

"(full name of man) who was furloughed and returned to this organization on (date) has left our employ (or, has ceased to be indispensable). His last known address is (address of man.)"

Forms to Be Filled Out

FORM FRI-11.

RETURN THIS FORM TO
OFFICE OF DIRECTOR OF AIRCRAFT PRODUCTION, PERSONNEL DEPARTMENT, WASHINGTON, D. C.

Date.....
Name of organization.....
P. O. Address.....Location of main plant.....
Location of other plants.....
Exact nature of industry.....
Approximate percentage of output going to United States Government or Allies directly..... ; indirectly.....
We now have the following shortages of skilled labor: (specify number of men actually short in each kind of job).....
No. of men between 21 and 31:.....
No. of men between 21 and 36:.....
No. of men between 18 and 36:.....
No. of men between 18 and 45:.....
No. of men over 45.....
Total No. of men employed.....
Total No. of women employed.....
To maintain scheduled or expected production on Government work, we need the following number of skilled or technical employees: (state actual number required in each trade).....

FORM FRI-11A.

LIST OF SKILLED MEN LOST BY DRAFT OR ENLISTMENT
By .....
Located at.....

Name of Man.	Present Rank.	Company.	Detachment.	Camp and Location.	Former Position.	If return is needed mark X and file application on Form Fri-1.

APPLICATION BLANK—FORM 1
When properly filled out in duplicate, mail this blank to.....
....., Washington, D. C.

APPLICATION FOR RETURN OF ENLISTED MAN IN HIGHLY SKILLED CLASS OF LABOR TO "NECESSARY" INDUSTRY

Dated at....., 191..
Application is hereby made for the return of following enlisted man:
Name..... Residence.....
Exact description of trade.....
Registered Local Board..... Order No..... Serial No.....
Last reported to Camp..... Unit.....
Taken into Army....., 191..., because.....
We ask that he be directed to report to.....
.....
We have the following direct Government Contracts:

Date.	Gov. Order No.	Quantity.	Description.	Dept. of Gov.

We are under contract with the following, who have direct Government Contracts from.....Department:
.....
We have established our status as "necessary" industry with District Board No. ..... of State.....,
located at .....
By.....(Title)
Sworn to before me at .....
this.....day of....., 191....
.....
Title of official administering oath.

I have checked the foregoing statements and have found them to be correct.
.....
Local Representative of.....Dep't.

Aeronautical Patents

ISSUED JUNE 11, 1918

1,269,185—To Edward Hately Hughes, Canton, Ohio. Aerial torpedo.
1,269,397—To Glenn H. Curtiss, Buffalo, N. Y., assignor to Curtiss Aeroplane & Motor Corp., a corporation of New York. Hydro-aeroplane-pontoon.
1,269,420—To Willis A. Gibons, Flushing, N. Y., assignor to The Goodyear's India Rubber Glove Mfg. Co., a corporation of Connecticut. Process of forming airplane structural elements.
1,269,547—To James Joseph Murray, New York, N. Y. Airplane.
1,269,570—To Glenn H. Curtiss, Buffalo, N. Y., assignor to Curtiss Aeroplane & Motor Corp., a corporation of New York. Convertible running-gear for aircraft.

ISSUED JUNE 18, 1918

1,269,645—To George M. Robbins, Newark, N. J. Airplane Hydroplane.
1,269,871—To Hartvig Sorley, Macomb, Ill. Airplane.
1,269,872—To Hartvig Sorley, Macomb, Ill. Propelling Mechanism for Airplanes.
1,269,873—To Hartvig Sorley, Macomb, Ill. Carriage Structure for Airplanes.
1,269,885—To Piotr Warminski, Baltimore, Md. Observation Device.
1,270,178—To George E. Lehtinen, E. Jaffrey, N. H. Aeronautical Compass.
1,270,200—To Charlie Peterson, Florence, Wis., assignor of one-fourth to Harvey Bowman, Florence, Wis., and one-fourth to Charles Ericson, Commonwealth, Wis. Airship.

Digest of the Foreign Aeronautical Press

L'Aeronauta, March, 1918

New Type of Observation Balloon—A new type of observation balloon has just been produced in Italy to the designs of Signor Prassone, director of the Italian Army Aircraft Works, and Major Avorio, chief of the Aerostatic Section of the Italian army.

On being tested this observation balloon has given altogether much more satisfactory results than the classic Parseval-Sigsfeld kite-balloon—which cannot be safely used in wind velocities exceeding 5-6 m. per second—and the various types

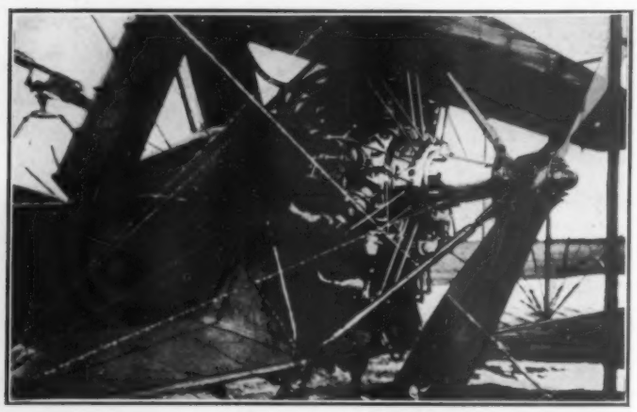

MOUNTING OF A SALMSON ENGINE IN A VOISIN BIPLANE
(C) *Kyrie Photo Service*

that have been derived therefrom, such as, for instance, the trilobal balloon of Cacquot.

Without entering into a detailed discussion of its features, it may be stated that the Prassone-Avorio balloon is essentially a spherical aerostat fitted with stabilizing means, which has been calculated as an airship, and acts as a kite. Its inherent stability is of such magnitude that the balloon may be employed in winds up to 25 m. per second velocity; it is obvious that this feature favorably affects the stability of the basket, which, owing to its method of suspension, increases in its turn the stability of the whole system.

A further advantage this balloon affords is, that for an equal load and ceiling it requires a smaller gas volume than the typical kite-balloon; thus a Prassone-Avorio of 1000 cu. m. capacity amply corresponds in its performance to a kite-balloon of 1200 cu. m. volume. It follows, that owing to its smaller dimensions the P.-A. balloon affords greater facility for transportation and housing, and a smaller target to anti-aircraft fire, while the amount of gas required for its filling is correspondingly decreased relative to older types.

On the other hand, its lesser resistance to the wind permits to employ mooring cables of smaller section, while its ability to ascend nearly vertically increases the attainable altitude; finally the increased indeformability of the envelope permits it to effect descents at a much higher rate of speed than was possible heretofore. The spherical form of this balloon as well as its considerable stability make it furthermore possible to mount defensive armament on board.

It may be finally noted that, should the mooring cable snap, the Prassone-Avorio balloon may be operated as a free balloon.

Flying (London), June 26, 1918

Allied Supremacy in the Air—In the matter of air work, it seems, the enemy made his last bid for equality at the beginning of the present series of offensives. Previously to the opening of March 21, he had concentrated and kept back as much air stuff and as many air pilots as could be managed, and, simultaneously with the opening of the first battle, he put in all that he could furnish.

In order to keep up to something like equality, he brought forward air reserves at a rate far beyond the normal; it was a policy that brought its own punishment, for even more than in the matter of infantry or artillery reinforcements, the air forces demand their full period of training, and this business of intensified reinforcement soon brought the German air forces down to a dangerously low level of quality. It is said that pilots have been captured to whom a single loop was a thing unknown, and, whatever truth there may be in this, it is certain that enemy pilots in many cases are so inexperienced that they will not risk a fight in less strength than a three to one superiority. That is the price that temporary equality cost; a definite inability to maintain even a fairly good defensive, and the probability of being wiped out of the air altogether, save for night bombers, in the course of the next three or four months, when the accession of American strength to the Allied air forces will begin to make itself felt along the front.

It was a good bid that the Germans made; away back in the days of early April enemy flyers did a good deal of damage in a legitimate way, apart from the bombing operations by machines unfitted for direct war work over the lines; as things stand at present, though, the Allied pilots hold the air, and every Hun machine that goes up flies in the knowledge that it is "up against it," and that Allied superiority is increasing.

GERMAN WIND VELOCITY METER
Central News Photo Service

Flight, June 20, 1918

British Air Raids on Germany—The following table shows the number of German towns raided by British airmen during May, together with the military objectives reached, and the number of times each town was raided:

Place	Military Objectives	No. of times raided
Bensdorf	Station and sidings	2
Coblenz	Station and barracks	1
Cologne	Stations, factories, barracks	1
Courcelles	Station and sidings	2
Diedenhofen (Thionville)	Station and sidings	14
Esch	Station and sidings	1
Hagendingen	Railways and factories	1
Karlsruhe	Station and workshops	1
Karthaus	Station and bridges	3
Kreuzwald	Electric power station	4
Landau	Barracks, station, sidings, gasworks	2
Mannheim	Chemical factory	3
Metz	Stations and sidings	2
Metz-Sablon	Stations, sidings, railway triangle	15
Saarbrucken	Factories, sidings, station	2
Spittel	Station	1

News of the Fortnight

Bristol Production Discontinued

When Archer A. Landon, Chief of the Production Division, Bureau of Aircraft Production, was in Buffalo, N. Y., last week, he ordered the discontinuance of the manufacture of Bristol fighting planes. Later he prepared the following statement for publication:

"Early last year it was decided, when the demand for two-seated fighters was great, to put into production at the Curtiss Co. an adaptation facsimile of the Bristol fighter, an English battle plane, fitted to a 12-cylinder Liberty motor. Recent flying tests have demonstrated that this machine is overpowered and not of military value, lacking maneuverability, and not having sufficient speed for war purposes. Inasmuch as the DH-4 is in production and meets the requirements and can be produced as fast as engines can be supplied, so that there will be no decrease in the number of planes going over seas, we are compelled to take the position that the country will be best served by immediately discontinuing Bristol production. We will make every effort to quickly put into production at the Curtiss Co. the SE-5 and the Caproni. These planes are well-known and are not experimental in any way. We hope that we will be able, in the near future, to re-employ the people who will have to be laid off under this order."

Some such order as this has been forecast for several weeks and makes no small change in the production program, but it is judged from the tenor of Mr. Landon's statement that it is proposed to make up the deficiency by an increased production of SE-5's or single-seat pursuit planes, Caproni night bombers and DH day bombers and probably Handley Page machines.

It is understood that the program called for the production by the Curtiss Aeroplane & Motor Corp. of 2000 or more Bristol fighting machines, and that of this order about fifty had practically been completed at the time the cancellation order was issued.

Lipsner in Charge of Air Mail

Capt. B. B. Lipsner of the United States Army, who has been acting as assistant to Captain Willoughby, in charge of the Aerial Mail Service, resigned his military commission July 13, to accept from the Postmaster General the position as Superintendent of the Aerial Mail Service.

Captain Lipsner entered upon the discharge of the duties of his new position on July 15. He will have charge of the operation and maintenance of the new system, with headquarters at Washington.

Captain Lipsner is a recognized authority on transportation and mechanical maintenance and assisted in the installation of the service. He was appointed to the Army on May 15, 1917. His home, which has been in Chicago, is now in Washington.

New Air Mail Record

After the fliers who brought the air mail from Washington and Philadelphia on July 23 had opportunity to confer with H. L. Hartung, in charge of the aerial station at Belmont Park and check up by consultation with the stations at Washington and Philadelphia, it was discovered that a record had been made.

Mr. Hartung wired the Bustleton and Washington stations and got the exact leaving time, which showed that the total lapsed time between Washington and Belmont Park, about 230 miles, was 2 hr. 10 min. At the beginning of the air mail service 3 hr. was considered good.

New American Ace

The latest American "Ace" is Lieut. James A. Meissner, who was recently decorated with the *Croix de Guerre* when he brought down his fourth machine. On July 8 he brought down his fifth.

The standing of American "Aces" is as follows now that Lieutenant Baylies and Baer are out of action:

Putnam	12
Parsons	5
Thaw	5
Campbell	5
Rickenbacker	5
Peterson	5
Meissner	5

Flying Training for Ground Officers

Maj.-Gen. W. L. Kenly, Director of Military Aeronautics, has issued this memorandum covering the instruction of flying officers of his Division:

SECTION A.

1. The policy of permitting non-flying officers to be trained as pilots is announced by the Director of Military Aeronautics for the purpose of building up in the Air Service *esprit de corps* by destroying the rapidly growing class distinction between the non-flying and the flying officer, and it is the firm belief that an officer who is trained as a pilot is of more value to the Air Service than one who is not trained as a pilot, even though his ordinary duties do not require him to pilot an airplane.

2. With the following exceptions the execution of the details of this policy rests entirely with the commanding officers of the various aviation stations:

a. No non-flying officer will be given flying instruction until after he has successfully passed the prescribed physical examination for pilot.

b. The following instruction for non-flying officers must not interfere in any way with the training of cadets.

c. Flying instruction for non-flying officers must not interfere in any way with the ordinary post and squadron duties of the officer.

d. Flying instruction for non-flying officers must be given at the convenience of the Government. It is not expected that all non-flying officers who desire flying training will be given flying training at once.

It is intended that this policy will be effected gradually.

SECTION B.

1. In view of the recent change in policy of the Department of Military Aeronautics with regard to non-flying officers being allowed to take up flying instruction, it has become necessary to formulate certain rules outlining the method to be pursued in handling those non-flying officers who are not allowed to fly. At the present time there are non-flying officers in the Air Service who may be classified as follows:

First. Men who have had no military experience whatsoever and who, due to the stress of the occasion, were granted commissions without their being given any preliminary military or theoretical course along aviation lines.

Second. Men who are graduates of training camps but who did not have sufficient basic military knowledge to hold the knowledge they gained while at these camps and consequently are little better off than the men who are in class one.

Third. Men who are graduates of training camps but who retain some knowledge along disciplinary and military lines.

Fourth. Officers of military experience who need no extra military training.

2. It is quite apparent that men in classes one and two should be required to take the entire ground school course before they are sent to a flying school, while men in class three should be given some special ground school course for the purpose of educating them along theoretical aviation lines only while men in the last class could probably receive sufficient instruction along aviation lines at a special aviation school.

It is to be noted that this is only a memorandum and is not regarded as a positive order and that the proposed instruction is not compulsory but rather permissible to those physically qualified non-flyers who may wish it. It may be construed as more in the nature of a request or a suggestion of what is considered desirable both for promoting harmony between the flying and non-flying personnel and also for making every man of the greatest possible value to the Service regardless of whether he may or may not ever be called upon to make practical or active use of his training. As such it is believed that it should and will be complied with generally as facilities permit by officers in the fourth classifications and in the manner outlined in the memorandum.

New Censor for Aeronautics

Second Lieut. F. B. Simond has been appointed censor in the Department of Military Aeronautics.

Kellogg May Join Investigators

Before the Senate Sub-Committee on Military Affairs on July 9 and 10, Maj. Cushman A. Rice of the United States Air Service overseas and lately returned from France described conditions on the Western battle front.

Maj.-Gen. W. L. Kenly, Director of the Department of Military Aeronautics, was a witness on July 20 before the Senate Sub-Committee on Military Affairs. It is understood that General Kenly was called to discuss remedies for certain unsatisfactory conditions said to have been found by the committee in its investigation of the general aircraft situation, and that among them was some remedy for the many and continued casualties at the flying fields.

It is stated that the committee has practically concluded its investigation and that the preparation of its report will be begun very soon.

It is also stated that the report will charge the waste of millions of dollars in experiments with Bristol machines; that 1200 training planes produced at a cost of $6,000,000 were "scrapped"; that these training planes were dangerous and caused the loss of lives of several aviators, and that responsibility for delay in production was due in part to amateurs in the Government employ and in part to the former Aircraft Board.

On the other hand, it is said that report will show that production under the Bureau of Aircraft Production shows greatly improved conditions, and that the Liberty engine is a complete success.

The scene of the aircraft investigation by the Department of Justice has been moved from Washington to Western manufacturing centers. The first hearing was at Dayton, Ohio, and it is understood that other hearings will be held at Detroit, Toledo and several cities.

It is reported that N. W. Kellogg, an attorney of national reputation as an investigator, has been called in to assist the official of the department and Judge Hughes, the special investigator.

Russian Expert on N. A. C.

Dr. Georges de Bothezat, of Petrograd, has been engaged by the National Advisory Committee for Aeronautics, Washington, D. C., as an adviser in aeronautics. Dr. Bothezat was lately professor of applied mechanics and aerodynamics in the Polytechnic Institute at Petrograd and enjoys international reputation as an investigator of aerodynamics. He has also acted as a consulting and designing engineer to Russian aircraft factories.

New American Combat Plane

According to the Philadelphia *Public Ledger* Bureau, the Curtiss Aeroplane Co. has just completed a combat triplane fitted with a 400 hp. engine which shows unusual climb and speed.

Army and naval officers who have seen the machine in tests are reported to be most enthusiastic over its possibilities. It carries two passengers and is equipped with two machine guns.

Castor-Bean Growing in Siam

The castor-oil plant grows wild in almost every part of Siam, but hitherto it appears that no attempts have been made in its cultivation. However, an extensive plantation has now been started by a Bangkok merchant who expects to harvest about 1000 tons of the seeds within five or six months after the planting, which is now in progress. It is the intention of this merchant to produce the oil on the premises.

Standard Increases Capital Stock

The Standard Aircraft Corp. announces an increase in capitalization from $5,000,000 to $10,000,000, divided in $7,000,000 preferred, and $3,000,000 common stock, all subscribed and taken. This has become absolutely necessary, in order to take care of the enormously increased production of the organization which, although but two years old, is now a predominant national figure in aircraft production. Of the preferred stock, $1,000,000 will, for the present, be retained in the company's treasury.

The officers of the company are: Harry Bowers Mingle, president; Edward E. Pennewill, vice-president and general manager; Max J. Finkelstein, vice-president and treasurer, and Charles H. Day, vice-president and consulting engineer.

Airplane Spruce Contingent

Provost Marshal General Crowder has issued a call for an additional 3000 men from thirty-eight states to produce spruce in the forests of the Northwest for airplane construction. From Class 1 only men who are qualified for special or limited service will be accepted.

These, as well as registrants in the second, third and fourth classes qualified for general military service, were permitted to volunteer until July 23, but after that date sufficient men will be selected from Class 1 to make up any deficieney in a state's quota.

450 American Battle Planes Ready

Four hundred and fifty American-built battle planes had been sent abroad or delivered at ports for shipment on July 5, the date of the latest complete official report reaching the War Department.

In announcing this figure, July 15, Secretary Baker disclosed also that deliveries of Liberty engines of all classes on the some date had reached 2,514.

To Inspect U. S. Air Stations Abroad

Chairman Padgett and other members of the House Committee on Naval Affairs will leave on a battleship to make a tour of inspection of the naval activities in the European war zone. Secretary Daniels has approved the idea of the trip and will detail an officer to accompany the party and make the arrangements. The committee will visit England and France where there are United States air stations of various kinds installed and maintained by the Navy. The party will be away five or six weeks.

Victor Aircraft Corporation

The A. S. Heinrich Corporation of Freeport, L. I., N. Y., has just changed title to the Victor Aircraft Corporation. The officers of the company remain the same.

A Rust Proofing

The increased cost of galvanizing and other processes of rust-proofing and the unsuitability of galvanizing or other metal as a coating for metal parts which must be inspected rigidly for defects before assembling and constantly reinspected during use, has turned attention strongly to the safety transparent, rust-proof and acid-proof finish which has been developed by the Enameling & Stamping Corporation of New York. It is said that no defects in metal can possibly be concealed by it when baked in its transparent form. Various Government and airplane manufacturers are carrying out tests of this finish. As a priming finish it grips the pores of the metal so closely that no scraping or cutting can alter the rust-proof effect, unless the metal itself is cut away. The rust-proof finish also is being applied in many cases with pigment, of all colors, in it. As it costs considerably less than porcelain enameling, it is expected to displace that finish for many articles. It is, in fact, less expensive than galvanizing or tinning under present conditions.

Barthel Joins Curtiss

T. E. A. Barthel has become associated with the Curtiss Aeroplane & Motor Corp. of Buffalo, N. Y., with duties connected with the finances of the organization. Mr. Barthel was formerly president and general manager of the King Motor Co. of Detroit.

Uncle Sam's Wars

The Widney Co., 320 S. Jefferson St., Chicago, Ill., manufacturers of advanced felt specialties, has recently issued an interesting booklet called "Uncle Sam's Wars." It is a thirty-two page booklet, and gives all of the wars since the Revolutionary conflict in which we have participated, together with photographs of the war presidents.

American Bronze Corp. Builds Addition

Owing to the increase in the demand for Non-Gran Bearing Bronze, the sole product of the American Bronze Corp., at Berwyn, Pa., a large addition to its works has been constructed and will be completed about August 1. This new plant is of fireproof factory construction, and will triple the concern's present capacity.

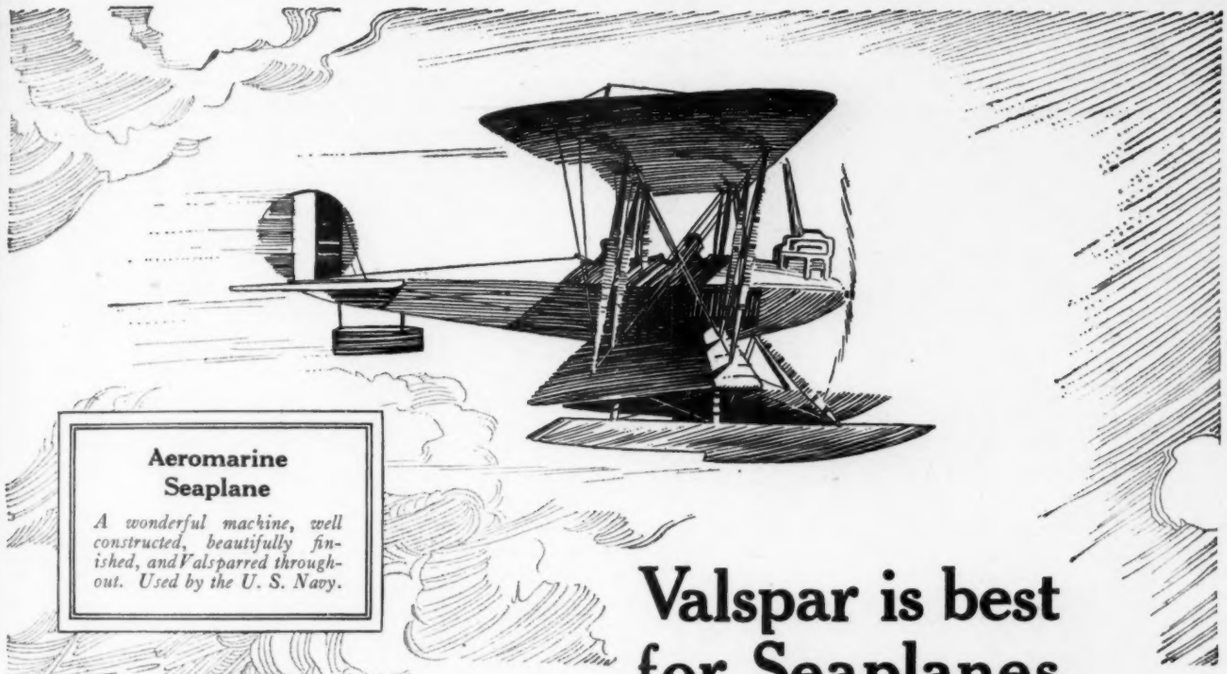

Aeromarine Seaplane

A wonderful machine, well constructed, beautifully finished, and Valsparred throughout. Used by the U. S. Navy.

Valspar is best for Seaplanes

SEAPLANE service is the most exacting in the world. But it doesn't affect Valspar, because Valspar is absolutely immune from water and extremely durable.

Valspar is extensively used on the airplanes and seaplanes of the Allies and the United States Government. It has successfully withstood the tests of actual war-service in its most strenuous phases.

Being a long-oil varnish it does not check, crack, or blister. It dries dust-free in two hours and to a hard finish in twenty-four hours. It will not turn white with the severest exposure.

Our Airplane Department is ready to give the benefit of its experience to any manufacturer. A valuable handbook on this subject will be sent to purchasing agents or superintendents of production on request.

We are Contractors to
United States Army and Navy, British Admiralty and Royal Flying Corps, Dutch and Spanish Governments

VALENTINE'S
VALSPAR
The Varnish That Won't Turn White

Valentine Products used by the world's leading airplane-makers include: Valspar Varnish, Valspar Bristol Enamel, Valspar Low Visibility Gray Enamel, Valspar Olive-Drab Enamel, Valspar Black Enamel, Valspar Filler (Wood), Valspar Primer (Metal), Valspar Primer (Wood), Valspar Khaki Enamel, Valspar Aluminum Paint. Dipping, Spraying, and Brushing coatings of all kinds, Quick-Drying Insignia Colors.

VALENTINE & COMPANY
456 Fourth Avenue, New York

Largest Manufacturers of High-grade Varnishes in the World—ESTABLISHED 1832

New York Chicago Boston TRADE VALENTINES MARK Toronto London Amsterdam

W. P. FULLER & Co San Francisco and Principal Pacific Coast Cities

Copyright, 1918, Valentine & Company.

ON THE PRESS

Aeronautical Engineering *and* Airplane Design

By SERGEANT ALEXANDER KLEMIN

Aviation Section, Signal Corps, U. S. A., in charge of Aeronautical Research Department, Airplane Engineering Department. Until entering military service, in charge of Department of Aeronautics, Massachusetts Institute of Technology and Technical Editor of *Aviation and Aeronautical Engineering.*

Based on a series of articles in *Aviation and Aeronautical Engineering* by Alexander Klemin and T. H. Huff, S.B., Aeronautical Engineer for the Standard Aero Corporation, formerly instructor in Aeronautics, Massachusetts Institute of Technology.

AN AUTHORITATIVE
HAND-BOOK : REFERENCE BOOK : TEXT-BOOK
for AERONAUTICAL ENGINEERS, DESIGNERS AND STUDENTS

Thirteen chapters on aerodynamical theory and data; twelve chapters on airplane design; profusely illustrated with photographs, charts and diagrams; printed on heavy paper; bound in cloth, lettered in gold

PRICE, POSTPAID, IN THE UNITED STATES $5.00 *net*

This book, which is based upon the course in Aeronautical Engineering at the Massachusetts Institute of Technology and prepared by the instructors at that institution, is the only complete work on the subject. It was recently printed serially in *Aviation and Aeronautical Engineering* as a " Course in Aerodynamics and Airplane Design," and was immediately recognized as the indispensable authority for the aeronautical engineer.

Owing to the great demand for this work, the text and illustrations have been thoroughly revised and brought up-to-date, and the course is being reprinted in book form.

THE GARDNER-MOFFAT COMPANY, INC.,
120 WEST THIRTY-SECOND STREET, NEW YORK CITY.

ADVANCE ORDER FORM

Send me, by parcel post C. O. D., a copy of " Aeronautical Engineering and Airplane Design " as soon as issued.

Name .....

Address .....

S-C-H No. 22 for Hardening in Lead or Potassium Cyanide and Melting Aluminum for Small Parts.

On account of its correct design and mechanical advantages this is a very popular furnace.

Strong Carlisle & Hammond

INDUSTRIAL FURNACES

for Oil, Natural Gas and Manufactured Gas

S-C-H Furnaces cover the whole wide range of heat-treating, hardening, tempering and melting. They give real service because they are built by men who know actual plant conditions. The wide variety of furnaces and the careful selection of sizes make it possible for every furnace user to secure equipment exactly suited to his needs.

Positive, uniform results, coupled with low operating cost and economical maintenance, explain why S-C-H Furnaces give such universal satisfaction.

Catalog 8-B shows the complete S-C-H line of 75 furnaces, together with a complete line of accessories for heat-treating plants. It's free —write for it today.

THE STRONG, CARLISLE & HAMMOND CO.

FRANKFORT AVENUE **CLEVELAND, OHIO**

Boston New York Chicago ←—*BRANCHES*—→ Philadelphia Detroit Pittsburgh

Remarkable Opportunity In Seaplanes and Motors

WE HAVE FOR SALE

1 Two-place complete Seaplane, twin float A 7, 90-100 HP, Hall-Scott Motor. Speed 70 miles per hour, especially constructed for schooling purposes, and equipped with Dep. Control.

2 Brand new Hall-Scott A 5a "Big Six" Navy Inspected Motors, 135-150 HP.

The Above at Very Reasonable Prices

Write for Particulars

BOEING AIRPLANE COMPANY

SEATTLE, WASHINGTON

Heat Control

"Heat Treatment — annealing, case hardening and tempering — determine more than anything else the quality of the finished product.

"Heat Control"—the secret of heat treatment — is reduced to an exact science in our plant.

Your valves, bolts and special parts are heat treated in furnaces whose temperatures are indicated by electrical pyrometers so sensitive that even a variation of less than five degrees is easily seen. An elaborate valve control system centralized at the pyrometer room enables these variations of temperature to be promptly corrected.

No element of chance enters into our heat treatment. The temperature is tested—controlled—KNOWN.

A DEPARTMENT
OF YOUR PLANT

for

Valves
Propeller Hub Bolts
Push Rods
Turnbuckles

The Steel Products Co.

Michigan Plant
Detroit, Mich.

Main Plant
Cleveland, Ohio

Metals Welding Plant
Cleveland, Ohio

P. PRYIBIL MACHINE COMPANY

MANUFACTURERS OF

FINE WOOD WORKING MACHINES

WE HAVE SERVED

CURTISS ENGINEERING CORPORATION
L. W. F. ENGINEERING COMPANY
WRIGHT-MARTIN AIRCRAFT CORPORATION
STANDARD AIRCRAFT CORPORATION
CONTINENTAL AIRCRAFT COMPANY

Why not you?

Factory, 512-524 West 41st Street, New York City
Established 1862

WIDMAN

Manufacturers of

Waterproof Ply Wood Panels of All Thicknesses and Plies

Stand Highest in Government Tests for
Strength and Water Resisting Qualities

FABRICATORS OF PARTS OF ALL KINDS

OUR ENGINEERING DEPARTMENT IS AT YOUR SERVICE

Sales Agents for Certus Glue
Absolutely Waterproof and accepted by the Government

J. C. WIDMAN & COMPANY

Fourteenth and Kirby Avenue **Detroit, Michigan**

WE USE THE CELEBRATED

LUMA

Radium Luminous Compound

For Aircraft Instruments

Manufacturers of luminous aircraft instruments will find it a great convenience and a distinct advantage to send us their dials to be Luma-lited.

Luma is absolutely guaranteed to contain only Radium as its activating agent, no Mesothorium, Radiothorium, Ionium nor Polonium being added.

It meets the requirements of the British Admiralty and specifications of the United States Government for use on military aircraft instruments and is now being used by leading manufacturers of such instruments.

We apply Luma to dials of every description. Our facilities are such that we are enabled to execute orders of any size promptly, skillfully and economically.

Estimates and full information upon request

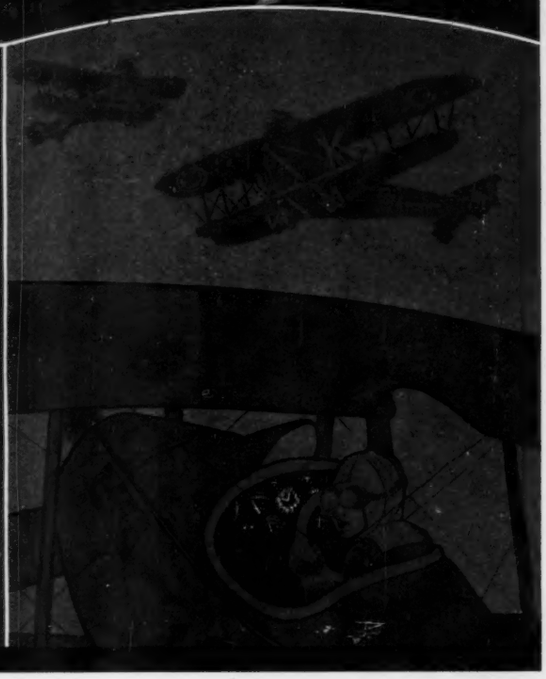

RADIUM DIAL COMPANY

GENERAL OFFICES-PITTSBURGH, PA.

LITTLE BLDG., BOSTON-MARSHALL-FIELD ANNEX BLDG., CHICAGO
501 FIFTH AVE., NEW YORK.

DIAL PAINTING FACTORIES-PITTSBURGH-LONG ISLAND CITY-CHICAGO-BOSTON

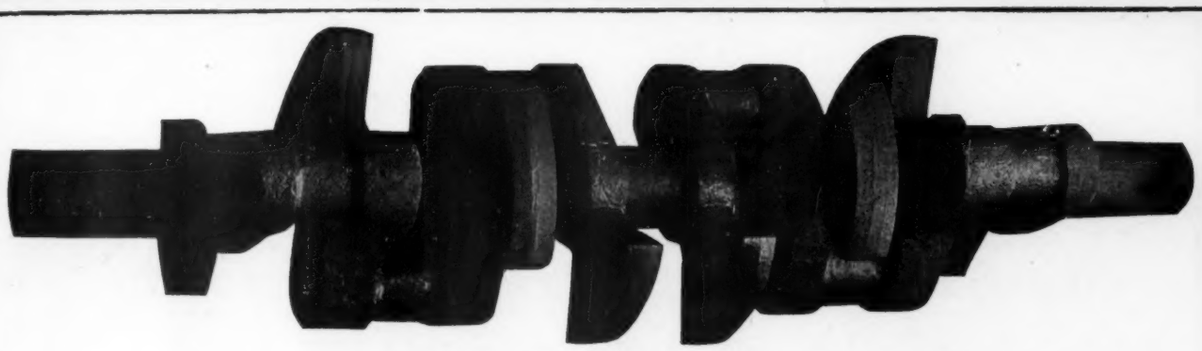

a counterbalanced aviation crankshaft . . . .

Patented July 10th, 1917

one of the 18 different
models we are now making
for 14 aviation motor companies . . .

reduces vibration and eliminates bearing pressure

We have shipped 63,771 Counterbalanced Crankshafts to July 24, 1918

THE PARK DROP FORGE CO. CLEVELAND, OHIO

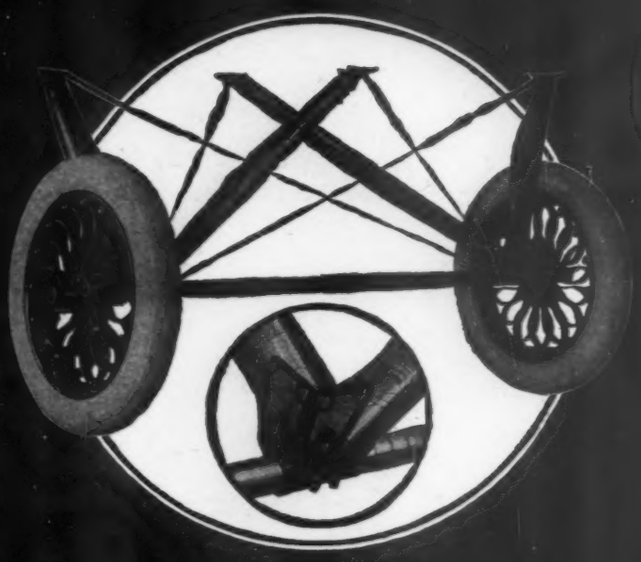

ACKERMAN LANDING GEAR

SIMPLICITY
STRENGTH
SERVICE

THE ACKERMAN WHEEL COMPANY
542 Rockefeller Building, CLEVELAND, OHIO. U.S.A.

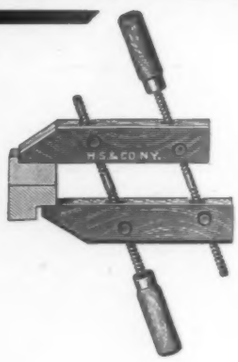

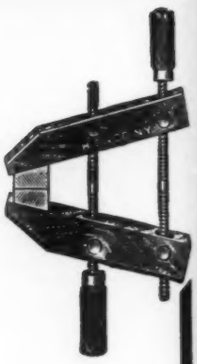

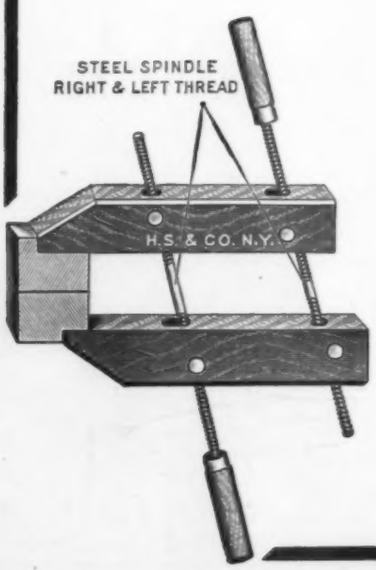

THE JORGENSEN PATENT

ADJUSTABLE HAND SCREW

is the first real improvement in years over the old style Wood Hand Screw.

JAWS CAN BE ADJUSTED TO ANY ANGLE. This is a decided advantage, as it saves the time usually spent in squaring up irregular surfaces. A *single clamp* will adjust to any of the positions shown, or any modification of them. One jaw can also be made to overlap the other.

SEND FOR SPECIAL CIRCULAR NO. 161

HAMMACHER, SCHLEMMER & CO.

HARDWARE, TOOLS AND SUPPLIES

New York, Since 1848 Fourth Avenue and 13th Street

The HOLBROOK Co.

New York City

MANUFACTURERS

Airplane Propellers
Airplane Sheet Aluminum Parts
Airplane Sheet Metal Parts
Airplane Woodwork
Airplane Upholstery

RESISTAL EYETECTS

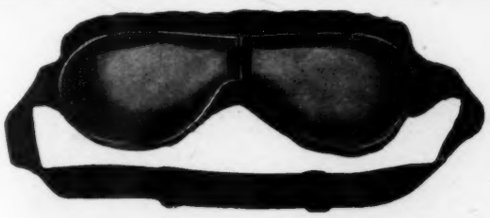

"Stand the crash better than either airplane or aviator"

—So writes a Flier in the Royal Air Force:

"Strauss & Buegeleisen:—I wish to fall in line with the many thousands of fliers who have been singing the praise of the Resistal Goggle. On November 23, 1917, I had a rather bad crash while flying at Everman Field, Fort Worth, Tex.

"I may truthfully say that Resistal Goggles stood the crash better than either the machine or me, I not having recuperated from my injuries at this date.

"I feel indebted to the Resistal for the fact that my eyesight was entirely spared me, while I received other injuries in the head and face. I am enclosing the Goggles which did the trick."—(Signed by a member of the Royal Air Force—name on request.)

GUARANTEE

THIS GUARANTEE OF RESISTAL AVIATOR GOGGLES IS TO CERTIFY THAT

1. **Resistal lenses are the same** as those tested by the **U. S. Bureau of Standards Test No. 13004,** and made the subject of **Bureau of Standards Report of March 25, 1918.**
2. They are unshatterable and will undergo with the same results the tests made by the Bureau of Standards.
3. They will not destroy, reduce, distort or impair the vision in any way, no matter when, where or for what length of time they may be continually worn. Specifically, this guarantees that the wearer of Resistal Goggles will pass the standard vision tests of the U. S. Aviator (Army or Navy) as well with Resistal Goggles as he may have without any goggles before his eyes.

STRAUSS & BUEGELEISEN

The U. S. Bureau of Standards

Says of RESISTAL glass that it is of "great importance in devices for protecting the eyes and face." And of ANTI-GLARE RESISTAL, the Bureau says:—"This type of glass should aid vision through haze and smoke since it screens off the light which is scattered most."

Write us for the Bureau of Standards full reports of March 25th and May 9th, 1918.

STRAUSS & BUEGELEISEN
Sole Manufacturers
438 Broadway **New York City**

The
Lanzius Variable Speed Aeroplane

Executive Offices
3405-3407 Woolworth Bldg., New York City
Telephone 8580 Barclay

Lanzius Aircraft Company

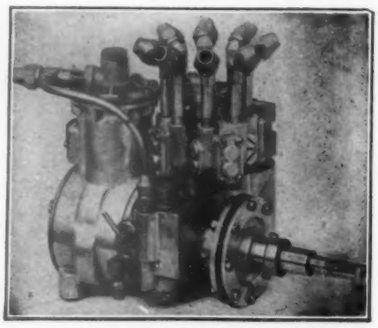

Christensen Self-Starter
FOR AIRCRAFT MOTORS

Starts any aircraft motor, 4-6-8-12 or 16 cylinders, by the touch of a button. Prevents accidents on the ground and in the air by its positive action.

Weighs 20 to 35 pounds complete.

A letter brings full information

The Christensen Engineering Co.
861 First National Bank Bldg., Milwaukee, Wis.

ENAMELING
CAPACITY 250,000 PIECES DAILY
EVERY CHARACTER — ALL COLORS
ENAMELING & STAMPING CORP'N OF NEW YORK
2ND AT WEBSTER AVE., L.I. CITY
SPECIALISTS IN BAKED-ON RUSTPROOFING TRANSPARENT OIL

A NEW BOOK ON
MAGNETO IGNITION
Its Principles and Applications with special reference to Aviation Engines
By MICH. E. TOEPEL
The instructor United States Government School for the Study of Magneto Ignition.
The first authoritative work on this subject Arranged as a questionnaire. Freely illustrated. Limp cloth. Handy pocket size. By mail $2.00.
There will be a big demand for this Book and we suggest early receipt of your order for prompt delivery.
SPON & CHAMBERLAIN, Publishers
120 W. Liberty Street, New York

Mahogany and Cedar Lumber and Veneers

Especially Manufactured and Selected for

Propellers and Fuselages

Astoria Veneer Mills and Dock Company

OFFICE, 347 MADISON AVENUE
NEW YORK, N. Y.

Telephone Call, Vanderbilt 5260

FACTORY, FOOT BLACKWELL STREET
LONG ISLAND CITY, N. Y.

WITTEMANN-LEWIS AIRCRAFT COMPANY

NEWARK, N. J.

Main Office and Factory:

Lincoln Highway near Passaic River

Telephone, Market 9096

IN THE AIR

Calls for

Speed—Strength—Ease of Control

In addition to these vital requisites the new Continental Pusher offers wide range of vision for Observer, Camera Man or Gunner.

The Continental Aircraft Corporation

Factory and Aviation Field
AMITYVILLE, L. I.

New York Office
120 LIBERTY STREET

MANUFACTURERS OF

Airplanes, Experimental Airplanes and Parts

Above picture shows a shipment of Walnut Logs received by the Hartzell Walnut Lumber Mills.

LIBERTY PROPELLERS

FROM THE LOG TO THE FINISHED PROPELLER BLADE

For many years the Hartzell Walnut Lumber Mills have been among the largest in the world. With our fine connections already established in the best sources of original supply, it was but natural, when the need was shown, that we should turn some of our excellent native Walnut into finished Airplane Propellers. Our large and splendidly equipped Propeller plant is the result. Here we turn out complete and in quantities the Liberty Propellers. New, modern and extensive equipment, the right material and plenty of it, coupled with experienced and careful workmanship, enable us to offer Airplane Manufacturers the Walnut Propeller of supreme quality—the LIBERTY.

HARTZELL WALNUT PROPELLER CO. :: PIQUA, OHIO

Thomas

THOMAS-MORSE AIRCRAFT CORPORATION

ITHACA, N.Y. U.S.A.

Contractors to U. S. Government

MATTISON

Propeller Shaping Machine

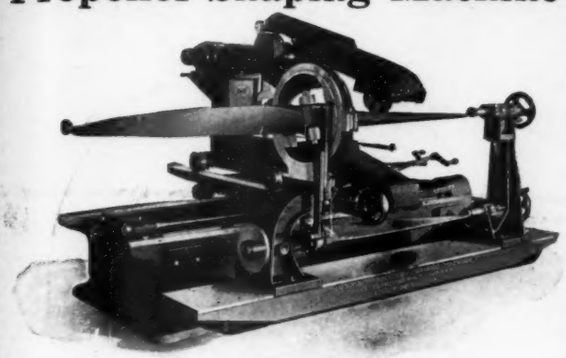

For Two, Three and Four-Bladed Screws

A brand new machine—designed and built with the thoroughness characteristic of all Mattison woodworking machines—which has been approved by many of America's largest propeller manufacturers.

It works close to finish-size, thereby eliminating the greater part of the expensive hand work which usually follows the machining operation of other methods.

Write or Wire for Details

MATTISON MACHINE WORKS

879 FIFTH STREET BELOIT, WISCONSIN

THE DEFIANCE AUTOMATIC AIRPLANE PROPELLER LATHE

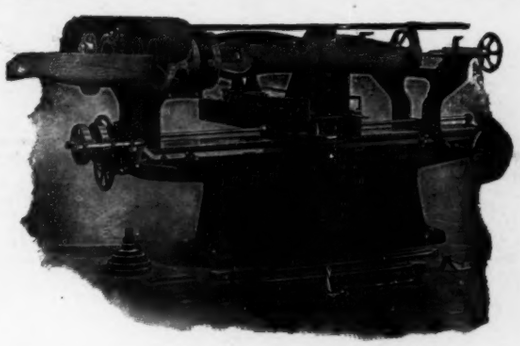

IT HAS GOVERNMENT AND MANUFACTURERS' ENDORSEMENTS

The proof of this lies in its use in England, in Italy, in Canada; its use in United States Government Arsenals, and fifteen of the leading propeller factories in America. Each machine in use releases from eight to ten skilled workmen for other duties. With one man operating a number of machines, the cost of working propeller blades close to size is reduced to a minimum. It automatically turns propeller blades of various sizes to any shape or pitch, and it will duplicate struts of irregular shape in facsimiles. Write for our circular which illustrates and describes this machine.

THE DEFIANCE MACHINE WORKS

DEFIANCE, OHIO, U. S. A.

NEW YORK *LONDON*

ERIE STANDARD AIRCRAFT METAL PARTS

DEPENDABLE SERVICE
QUANTITY-PRODUCTION

Our plant at Erie—the largest of its kind—specializes on AIRCRAFT BOLTS, NUTS and CLEVIS PINS conforming to Government Specifications.

A product as near 100% perfect in quality and machine practice as the human element will permit.

Please request our New York Office to send you copy of our catalogue.

ERIE SPECIALTY COMPANY.
8 West 40th St., New York City
Main Plant Erie, Pa.

"The Cavalry of the Clouds and The Navy That Flies"

are now being given exclusive and intimate expression through the

Air Service Journal

the official publication of the *Air Service Association*—the only service organization of the aviation branches of the Army and Navy.

The Association was organized within the service, by flying officers, who elected their own officers, and its membership is made up of the men who are fighting and will fight our air battles.

In addition to the established editorial features of AIR SERVICE JOURNAL—all the news of the Air Services each week, foreign aeronautical news, notes of the flying fields and ground schools, Air Service orders, special articles on aeronautical subjects, and photographs of aerial happenings all over the world—it will feature exclusive articles by officers of the Air Services through the editorial board of the Air Service Association.

Special offer to new subscribers—two dollars a year, 52 issues; or one dollar for six months, 26 issues. Regular price three dollars, single copies ten cents

THE GARDNER-MOFFAT CO.
INCORPORATED
120 West 32d Street New York City

THE GARDNER-MOFFAT COMPANY
120 West 32d Street, New York City

Enclosed is { money order / check } for ..... dollars, for which send me AIR SERVICE JOURNAL for { one year. / six months.

Name .....

Address .....

.....

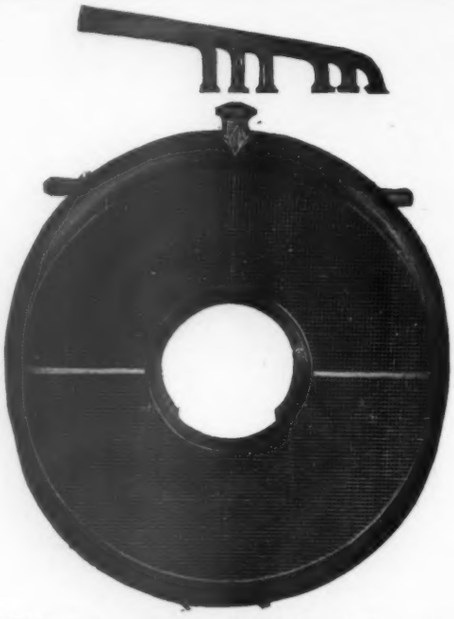

AJAX Auto and Aero Sheet Metal Company
Manufacturers and designers of
AERO RADIATORS INTAKE and EXHAUST PIPES
H. W. MEYER, 245 West Fifty-fifth Street, New York



"Flexo" Aero RADIATORS

The only core that will stand severe landing shocks.

No sharp corners to crystallize through vibration.

The only core that can be so bent without injury to the metal or soldered joints.

"FLEXO"—PATENTED

FLEXO MANUFACTURING CO.
1312-1320 E. 12th STREET LOS ANGELES, CAL.

Aeronautical Trade Directory

AVIATION AND AERONAUTICAL ENGINEERING will furnish information and addresses of companies listed below.

Names of Advertisers in this issue are printed in capitals.
See Index to Advertisers on page 68

ACCESSORIES AND INSTRUMENTS

Advance Felt Specialty & Cutting Co.
INTERNATION AERONAUTICAL INSTRUMENT CORP.
JOHNS-MANVILLE, H. W., CO.
King, Julius, Optical Co.
THE MOTO-METER CO.
National Gauge & Equipment Co.
Nelson Blower & Furnace Co.
O'Hara Waltham Dial Co.
Queen-Gray Co.
Rieker, Walter.
SPERRY GYROSCOPE CO.
Standard Aeronautical Co.
Stewart-Warner Speedometer Corp.
TAYLOR INSTRUMENT COMPANIES
Veeder Mfg. Co.
Western Electric Co.

AIRPLANES

Aeromarine Plane and Motor Co.
Blackhawk Airplane Co.
BOEING AIRPLANE CO.
Breese Aircraft Corp.
THE BURGESS COMPANY.
California Aviation Co.
CONTINENTAL AIRCRAFT CORP.
CURTISS AEROPLANE & MOTOR CORP.
Dayton Wright Airplane Co.
Des Lauriers Aircraft Corp.
Dewey Aeroplane Co.
Engel Aircraft Co.
Fisher Body Corp.
Fowler Airplane Corp.
Gallaudet Aircraft Corp.
Heinrich, A. S., Corp.
LANZIUS AIRCRAFT CO.
Lawrence-Lewis Aeroplane Co.
Lawson Aircraft Corp.
Lewis & Vought Corp.
LOENING AERONAUTICAL ENG. CORP.
Longren Aeroplane Co.
L. W. F. ENGINEERING CO.
MARTIN, GLENN L., CO.
Michigan Aircraft Corp.
ORDNANCE ENG'RING CORP.
Patterson Aeroplane Co.
Peirce, Sam'l S., Aeroplane Corp.
Smith, Kyle, Aircraft Co.
Sperry, Lawrence, Aircraft Co.
Springfield Airplane Co.
STANDARD AIRCRAFT CORP.
Sturtevant Aeroplane Co.
THOMAS-MORSE AIRCRAFT CORP.
The Willys-Morrow Co.
WITTEMANN-LEWIS AIRCRAFT CO.
Whittemore-Hamm Co.
Wright-Martin Aircraft Corp.

AIRPLANE ENGINES

Aeromarine Plane and Motor Co.
Ashmusen Mfg. Co.
Continental Motors Co.
CURTISS AEROPLANE & MOTOR CORP.
Dayton Aero Motors Co.
Detroit Gas Turbine Corp.
DUESENBERG MOTOR CORP.
General Ordnance Co.
General Vehicle Co.
Gyro Motor Co.
HALL-SCOTT MOTOR CAR CO.
Kemp Machine Works.
Kessler Motor Co.
Knox Motors Co.
Nordyke & Marmon.
Packard Motor Co.
Roberts Motor Mfg. Co.
Rolls-Royce, Ltd.
Springfield Motors Co.
Sterling Engine Co.
Sturtevant, B. F., Co.
Trego Motors Corp.
THOMAS - MORSE AIRCRAFT CORP.
UNION GAS ENGINE CO.
Van Blerck Motor Co.
Willys-Overland Co.
WISCONSIN MOTOR MFG. CO.
World's Motor Co.
Wright-Martin Aircraft Corp.

AIRPLANE PARTS

Aircraft Parts Mfg. Co.
American Body Co.
ASTORIA VENEER MILL & DOCK CO.
BARCALO MFG. CO.
Century Telephone Construction Co.
Chicago Aeronautical Supply Co.
DAYTON METAL PRODUCTS CO.
ERIE SPECIALTY CO.
GENERAL BAKELITE CO.
HOLBROOK CO.
KAWNEER MFG. CO.
Levett, Walker M., Co.
New Jersey Veneer Co.
Pressed & Welded Steel Products Co.
Rogers Construction Co.
Standard Parts Co.
Welch Mfg. Co.
Whittemore-Hamm Co.
WIDMAN, J. C., & CO.
Willys-Morrow Co.
Wilson Cabinet Co.

ALUMINUM

Acieral Co. of America
Aluminum Castings Co.
ALUMINUM CO. OF AMERICA
American Metal Co., Ltd.
Levett, Walker M., Co.
LEYGRAND & CO.
McAdamite-Aluminum Co.
SO-LUMINUM MFG. & ENG. CO. (SOLDER)
STIMPSON, EDWIN B., CO.
United Smelting & Aluminum Co.

AVIATION SCHOOLS

American School of Aviation
America Trans-Oceanic Co.
Atlantic Coast Aeronautical Station
Beam Airplane Co.
Blackhawk Airplane Co.
Curtiss Training Schools
EAGLE AVIATION SCHOOL
The Hydrerocraft Co.
Michigan State Auto School
Moler Aviation Instructors
Penn. State School of Aero-Mechanics
Stinson School of Aviation
Whittemore-Hamm Co.

(*Continued on page 57*)

FOX

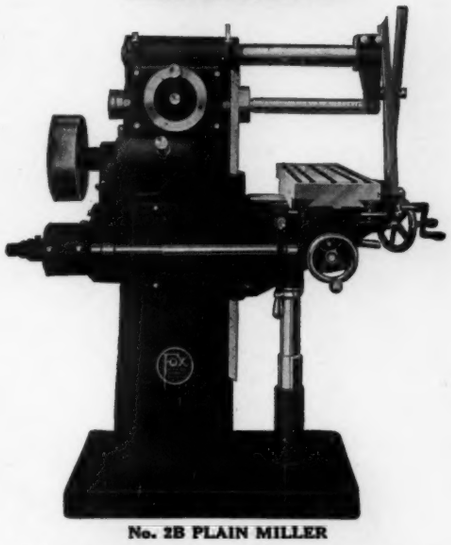

No. 2B PLAIN MILLER

Single Pulley Drive

12 changes to spindle speeds
6 changes to each spindle speed
No. 9 taper in spindle.
Table 8½ x 37"

Hardened machine steel gears throughout insure maximum driving power at all speeds.

We also build Universal Millers, Dividing Heads, Vertical Attachments and Vises.

Write for Circular

THE FOX MACHINE COMPANY
1810 W. Gavson St., Jackson, Mich.
Formerly of Grand Rapids, Mich.

"DALTON SIX"

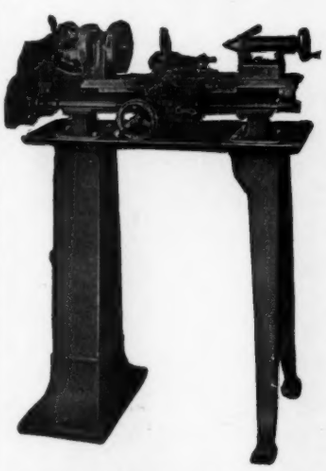

In the Manufacture of Aeroplanes or the many small parts comprising a Unit

"Dalton Six"

is indispensable.

Furnished for English or Metric Thread Cutting.

One Manufacturer of fine instruments for aeroplanes now has

(36) "DALTON SIXES" Installed

Why Not Investigate?

BULLETIN B602C GIVES DETAILS

Dalton Manufacturing Corp.
Successors to Dalton Mach. Co., Inc.
1911 Park Avenue New York, U. S. A.

FALCON
PROPELLERS

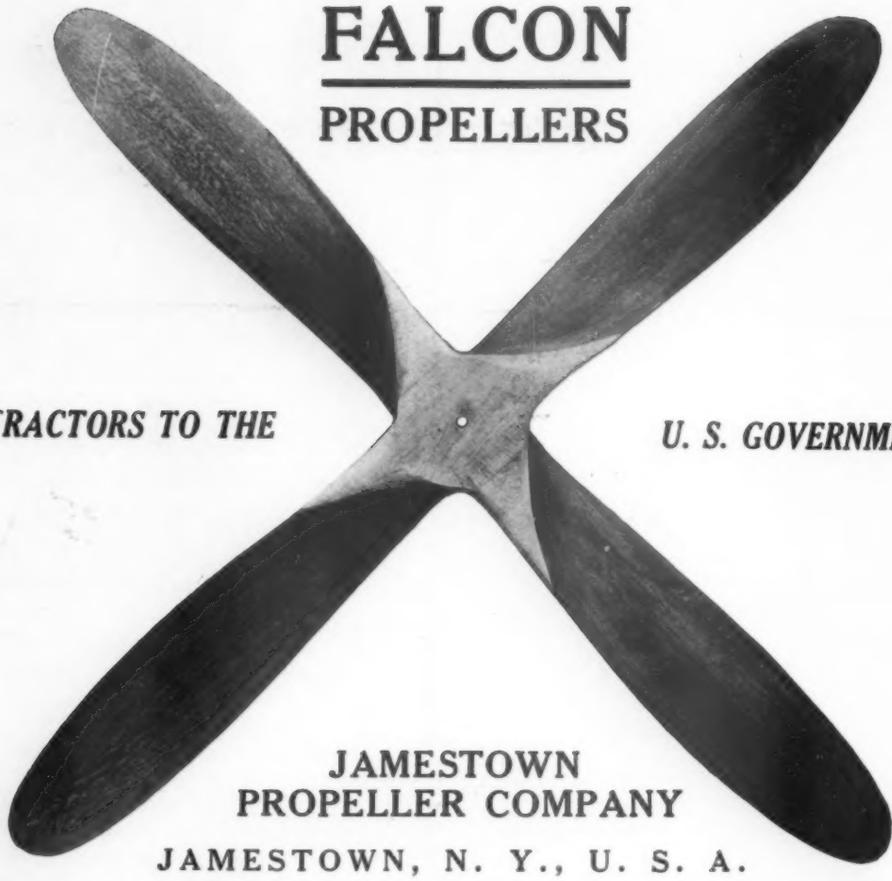

CONTRACTORS TO THE *U. S. GOVERNMENT*

JAMESTOWN
PROPELLER COMPANY
JAMESTOWN, N. Y., U. S. A.

FUEL LEVEL GAGES

This cut shows our Model 51 Gage which is standard on practically all type of military training machines.

Other types of gages in large quantities are "doing their bit" as part of the equipment of English Government Warplanes.

SPECIAL TYPES DESIGNED FOR YOUR ESPECIAL NEEDS.

BOSTON AUTO GAGE CO.
8 WALTHAM STREET, BOSTON, MASS.

ROME AERONAUTICAL RADIATORS

Developed from years of experience in building all types of radiators.
They possess every feature and qualification necessary for a high grade product.

STRONG
EFFICIENT
DURABLE

Used on the best American flying machines.
Our engineering department is at your service.

Rome-Turney Radiator Company
Rome, N. Y., U. S. A.

Aeronautical Trade Directory—*Continued*

BALL BEARINGS
The Fafnir Bearing Co.
GURNEY BALL BEARING CO.
Hess-Bright Mfg. Co.
NEW DEPARTURE MFG. CO.
Norma Company of America
S. K. F. Ball Bearing Co.
U. S. Ball Bearing Mfg. Co.

BALLOONS: DIRIGIBLES
Burdette Oxygen Co.
Connecticut Aircraft Co.
Custer Specialty Co. (Statoscope)
Gas Engineering Co. (Gas Plants)
GOODYEAR TIRE AND RUBBER CO.
United States Rubber Co.

BAROGRAPHS AND BAROMETERS
Green, Henry J.
INTERNATIONAL AERONAUTICAL INSTRUMENT CORP.
Sussfield & Lorch
TAYLOR INSTRUMENT COMPANIES

BEARING METALS
Aluminum Castings Co.
American Bronze Corp.
FAHRIG METAL CO.
Levett, Walker M., Co.
Magnolia Metal Co.

BUSHINGS
Aluminum Castings Co.
American Bronze Corp.
Bound Brook Oil-less Bearing Co.

CARBURETORS
H. & N. Mfg. Co.
Master Carburetor Co.
Miller Carburetor Co.
Stromberg Motor Devices Co.
Wheeler & Schebler
ZENITH CARBURETOR CO.

CLOCKS AND WATCHES
Chelsea Clock Co.
Depollier, J., & Son
Hamilton Watch Co.
Ingersoll, Robert H., & Bros.
Waltham Watch Co.

CLOTHING
Abercrombie & Fitch
Cross, Mark
N. Y. Sporting Goods Co.
Rainwear Co.
Rogers, Peet & Co.
Sanders Company
Spalding, A. G., & Bros.

COMPASSES
SPERRY GYROSCOPE CO.
Star Compass Co.
TAYLOR INSTRUMENT COMPANIES

DOPE AND VARNISH
Adams & Elting Co.
American Emaillite Co.
BROOKLYN VARNISH MFG. CO.
CERTUS COLD GLUE CO.
CHEMICAL PRODUCTS CO.
Conover, The C. E., Co.
DU PONT CHEMICAL WORKS
Flexible Compound Co.
Harland, Wm., & Son
Howe Varnish Co.
Lucas, John, Company
Masury, John W., & Son
Perry-Austen Company
PRATT & LAMBERT
SHERWIN-WILLIAMS CO.
Smith, Edward, & Co.
Standard Varnish Works
VALENTINE & COMPANY
Weeks & Co.

DRIFT INDICATOR
SPERRY GYROSCOPE CO.

DRY KILNS
Cutler Dry Kiln Co.
Grand Rapids Veneer Works

DYNAMOMETER
Sprague Electric Works

ENGINE PARTS
Allegheny Forging Co.
Aluminum Castings Co.
Anderson Forge & Machine Co.
BARCALO MFG. CO.
BROOKS MACHINE CO.
Burd High Compression Ring Co.
Crosby Steam Gage & Valve Co.
Dallet, Thos. H., Co.
DOEHLER DIE CASTING CO.
ERIE SPECIALTY CO.
Fibre Finishing Co.
Gifford, Leland, Co.
Gill, P. H., & Sons
Hayes Mfg. Co.
Hydraulic Pressed Steel Co.
Levett, Walker M., Co.
Meisel Press Mfg. Co.
PARK DROP FORGE CO.
Pressed & Welded Steel Products Co.
Standard Parts Co.
STIMPSON, EDWIN B., CO.
Taft-Peirce Mfg. Co.
TIOGA STEEL & IRON CO.
Williams, J. H., & Co.
Whitman & Barnes Mfg. Co.
WYMAN-GORDON CO.

ENGINEERING
Automotive Engineering Co.
ORDNANCE ENGINEERING CO.
White, J. G., Engineering Corp.

FABRICS
Courtrai Mfg. Co.
Hutchinson, Scott Co.
Lamb, Finlay & Co.
McBratney, Robt., & Co.
Whitman, Clarence & Co.

FELT
Advance Felt Specialty & Cutting Co.
Booth Felt Co.
Western Felt Works

FIRE EXTINGUISHERS
Fyr-Fyter Co.
JOHNS-MANVILLE, H. W., CO.
Pyrene Mfg. Co.

GAGES
Advance Felt Specialty & Cutting Co.
BOSTON AUTO GAUGE CO.
Crosby Steam Gauge & Valve Co.
FOXBORO CO., INC.
Greenfield Tap & Die Corp.
United States Gage Co.

GASKETS
Advance Felt Specialty & Cutting Co.
Booth Felt Co.
Fibre Finishing Co.

GLUE
Armour Glue Works
Baeder & Adamson
Ferdinand, L. W., & Co.
WIDMAN, J. C., CO.

(*Continued on page* 59)

Johns-Manville

Aeronautic Instruments

OUR designing staff and manufacturing organization are both at the call of those who require *speed indicating* and *revolution recording* instruments.

We invite your special problems in airplane accessory apparatus.

H. W. Johns-Manville Co.
New York City

10 Factories. Branches in 60 Cities

VENUS PENCILS

have won world wide recognition for their superb quality. The lead is smooth, even, gritless, true to grade and peerless for severe service.

Specify VENUS and get VENUS

17 black degrees
(with and without eraser tips)
6B softest to 9H hardest
and hard and medium indelible copying
all perfect!

FREE!

(except packing and postage)

Send 6c in stamps to cover actual cost of packing and postage and we'll send FIVE trial length VENUS Pencils and VENUS ERASER for test!

American Lead Pencil Co.
242 Fifth Avenue, NEW YORK
and Clapton, London, Eng.

WIRE WHEELS

FOR COMBAT AND ALL OTHER TYPES OF

AIRPLANES

CONTRACTORS TO
LEADING AIRPLANE COMPANIES

Our Engineering Department will gladly cooperate with you in your experimental work

SPRANGER WIRE WHEEL CORPORATION

DETROIT, U. S. A.
NEW YORK REPRESENTATIVE
THOS. C. CHEASLEY
137 West 47th Street Phone Bryant 8570

Multiple Storage Batteries

deliver

20 Watt Hrs. per lb. of Elements. Multiple Storage Batteries are the LIGHTEST and most POWERFUL manufactured for aeronautical motor ignition and starting systems.

Correspondence invited

MULTIPLE STORAGE BATTERY CO.,
427 West 50th Street, New York City

IN ACTUAL DAILY PERFORMANCE

In every branch of military service—Engineering Corps, Aviation Section, Quartermaster Corps, and general Patrol, Scout, and Dispatch duty—you will find the

Indian Motocycle With Powerplus Motor

Greatest strength, endurance, speed, power, accessibility, and all-round dependability.
We will be pleased to arrange demonstrations of all Indian models for interested military officials

Illustrated Indian Catalog and other descriptive literature sent anywhere on request

HENDEE MANUFACTURING COMPANY
(*Largest Motorcycle Manufacturers in the World*)
767 STATE STREET SPRINGFIELD, MASSACHUSETTS

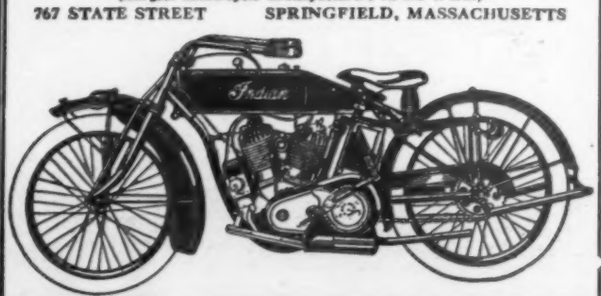

WEST WOODWORKING COMPANY

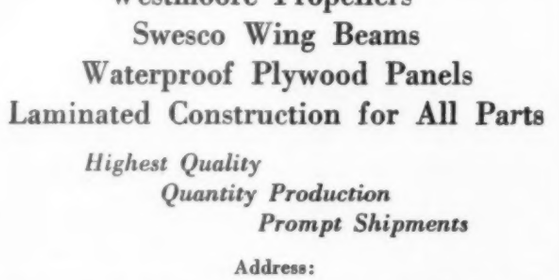

(Patent Pending)

Manufacturers of

Westmoore Propellers
Swesco Wing Beams
Waterproof Plywood Panels
Laminated Construction for All Parts

Highest Quality
Quantity Production
Prompt Shipments

Address:

WEST WOODWORKING COMPANY
308-324 N. Ada Street Chicago
Cable address "SWESCO"

Cabinet makers with over thirty years' successful business behind them

Aeronautical Trade Directory—*Continued*

GOGGLES

Hardy, F. A. Co.
Meyrowitz, E. B.
STRAUSS & BUEGELEISEN
Strong, Kennard & Nutt
Triplex Safety Glass Corp.
Willson, T. A., & Co., Inc.

HANGARS

American Bridge Co.
Anchor Corrugating Construction Co.
Ashley Steel Bldg. Co.
Austin Co., The
Barney, John M.
Howell, Field & Goddard, Inc.
Keasby & Mattison
Milliken Brothers
Pruden, The C. D., Co.
Steel Fabricating Co., The
Virginia Bridge & Iron Co.

HOISTS

YALE & TOWNE MFG. CO.

IGNITION

PHILIPS-BRINTON CO., THE

LIFE PRESERVERS

Robinson-Roders Co.
Universal Safety Mattress Co.

LUMBER

Alcock Co., John L.
American Balsa Corp.
ASTORIA VENEER MILLS & DOCK CO.
Chetham Lumber Co.
Delatour, J.
Dutton, A. C., Lumber Corp.
Ludlow, Israel
Mengel, C. C., & Bros. Co.
New Jersey Veneer Co.
Sheip & Vandergrift

LUMINOUS COMPOUND

COLD LIGHT MFG. CO.
Cummings, W. L., Chemical Co.
RADIUM DIAL CO.
RADIUM LUMINOUS MATERIAL CORP.

MACHINERY, METAL WORKING

DALTON MFG. CORP.
DEFIANCE MACHINE WORKS
FOX MACHINE CO.
Warner & Swasey Co.

MACHINERY, WOOD-WORKING

Curtis Machine Corp.
DEFIANCE MACHINE WORKS
Fay, J. A., & Egan Co.
FOX MACHINE CO.
Machinery Merchants, Inc.
MATTISON, C., MACHINE WORKS
Olney & Warrin
PRYIBIL, P., MACHINE CO.
YATES, P. B., MACHINE CO.

MAGNETOS

Berkshire Magneto Corp.
Bosch Magneto Co.
ERICSSON MFG. CO.
Remy Electric Co.
Splitdorf Electrical Co.

MANIFOLDS

AJAX AUTO & AERO SHEET METAL CO.
Pressed & Welded Steel Products Co.

METALS

Acieral Co. of America
AMERICAN BRONZE CORP.
American Vanadium Co.
Bethlehem Steel Co.
BETZ-PIERCE CO., THE
BLUM, JULIUS & CO.
Detroit Pressed Steel Co.
Federal Pressed Steel Co.
Garland Ventilator Co.
Gueder, Paeschke & Frey Co.
KAWNEER MFG. CO.
La Salle Steel Co.
Levett, Walker M., Co.
Rumford Metal Co.
SO-LUMINUM MFG. & ENG. CO.
Standard Alloys Co.
Steel Sales Corp.
STEEL PRODUCTS CO.
STIMPSON, EDWIN B., CO.
Wheeler, Frank H., & Son

MODEL AIRPLANES

Ideal Aeroplane Supply Co.
Wading River Mfg. Co.

MOTORCYCLES

Excelsior Motor Mfg. Supply Co.
HENDEE MFG. CO.
Harley-Davidson Co.
Militare Motor Vehicle Co. of America

OILS AND LUBRICANTS

BAKER CASTOR OIL CO.
Graphite Lubricant Co.
Gulf Refining Co.
Sheppard Ideal Oil Co.
Sun Co., The
Standard Oil Co.
Swan & Finch
Texas Co., The
Vacuum Oil Co.
WAKEFIELD, C. C., & CO., LTD.

PACKING

Advance Felt Specialty & Cutting Co.
Booth Felt Co.
Fibre Finishing Co.

PHOTOGRAPHY

BROCK, ARTHUR, JR.
Herbert & Huesgen Co.

PISTONS

Aluminum Castings Co.
Levett, Walker M., Co.

PISTON RINGS

American Piston Ring Co.

PONTOONS

Niagara Boat Co.
PALMER-SIMPSON CO.
Welin Marine Equipment Co.

PROPELLERS

AMERICAN PROPELLER & MFG. CO.
American Sash & Door Co.
Aviauto Mfg. Co.
Breitung & Co., Ltd.
C. M. O. Physical Laboratory
DOYLE, W. A.
HARTZELL WALNUT PROPELLER CO.
JACUZZI BROS.
JAMESTOWN PROPELLER CO.
Lang Propeller Co. of America
Steves Sash & Door Co.
Reinforced Propeller & Insulating Co., The
United States Aero Propeller Co.
Washington Aeroplane Co.
WEST WOODWORKING CO.

(*Continued on page* 61)

MARVELITE
Alight at Night

A new book on

Self-Luminous Radium Compounds

Sent free on request

Valuable scientific information for Watch, Clock, Compass and Instrument Manufacturers, who use luminous dials. Tells you how to select material that will meet your particular needs economically, and points out mistakes to be avoided. Contents, in brief:

Phosphorescent Materials. Radium Luminous Compounds. Inspection of Self-Luminous Radium Compounds. Life of Such Compounds. Comparative Luminosity of Fine and Coarse Crystals. High and Low Grade Marvelite.

Send for the book today, and be fully informed on a subject which is going to be a vital one in your business. Keep it for reference.

COLD LIGHT MFG. CO.
558 West 158th Street : : New York

Cold Light Mfg. Co., 558 West 158th St., New York
Please send us, without charge, your book on Self-Luminous Radium Compounds.

Name .....
Address .....
A

RLM *in Active Service*



A snap, a spin and one of the first airplanes to carry an RLM-equipped instrument "over there," fell a twisted mass of wreckage. That was in 1915 after a few months of service. Not injured by the fall, the instrument was transferred to a second plane. This suffered a similar fate, yet neither the efficiency of the instrument nor the RLM luminosity was impaired.

Once again the instrument was transferred and a few months ago the third plane was shot down and rendered useless. The instrument, still unharmed, was returned to the United States where Government tests proved the RLM was, for all practical purposes, as good as on its first day of usefulness, even after these three years of constant and trying service.

The above is but one proof that RLM is the superior self-luminant. If you would know more address Dept. K.

RADIUM LUMINOUS MATERIAL CORPORATION

55 Liberty St.
New York City

SEES AT NIGHT

Plants: Orange, N. J.
Boonton, N. J.
Mines: Colorado, Utah

Elastic Aviation Cord

For Shock Absorbers on Airplanes

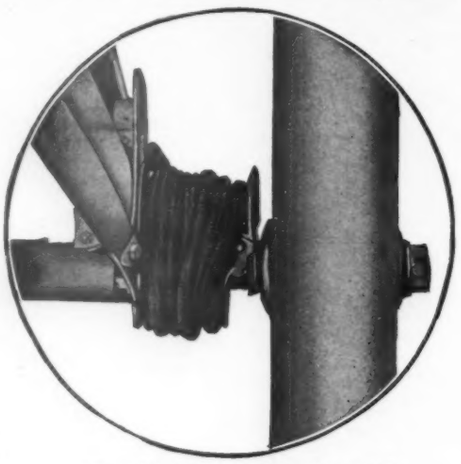

We originated and have developed this special heavy elastic cord for airplane shock absorbers.
We are the largest manufacturers in the world of Heavy Elastic Cord and owing to our factory capacity we can make prompt deliveries.

Samples on request

J. W. WOOD ELASTIC WEB CO.
FACTORY: STOUGHTON, . ASS.

OFFICES

45 East 17th Street . . . . . New York
181 W. Lake Street . . . . . Chicago
32 St. Peter Street . . . . . Montreal, Canada

Fahrig Anti-Friction Metal

The Best Bearing Metal on the Market
A Necessity for Aeroplane Service

Fahrig Metal Quality has become a standard for reliability. We specialize in this one tin-copper alloy which has superior anti-friction qualities and great durability and is always uniform.

When you see a speed or distance record broken by Aeroplane, Racing Automobile, Truck or Tractor Motor, you will find that Fahrig Metal Bearings were in that motor.

FAHRIG METAL CO., 34 Commerce St., N.Y.

TURNBUCKLES

of the

Highest Quality

to Meet the Most
Exact Requirements

Standard Turnbuckle Company

CORRY, PA.

New York Office: Woolworth Building

Aeronautical Trade Directory—*Continued*

PYROMETERS
FOXBORO CO., INC., THE
Moto-Meter Co.
Shore Instrument & Mfg. Co.
TAYLOR INSTRUMENT COMPANIES

RADIATORS
AJAX AUTO & AERO SHEET METAL CO.
A-Z Co.
Bush Mfg. Co.
El Arco Radiators Co.
English & Mersick Co.
FLEXO MFG. CO.
Harrison Radiator Co.
Livingston Radiator Co.
McCord Mfg. Co.
ROME-TURNEY RADIATOR CO.
STANDARD ROLLER BEARING CO.

RIVETS
STIMPSON, EDWIN B., CO.

SCELEROSCOPE
Shore Instrument & Mfg. Co.

SHEET METAL FITTINGS
BLUM, JULIUS & CO.
Rogers Construction Co.

SHOCK ABSORBERS
Dural Rubber Corp.
General Rubber Goods Co.
RUSSELL MFG. CO.
WOOD, J. W., ELASTIC WEB CO.

SPARK PLUGS
Bosch Magneto Co.
Champion Ignition Co.
JOHNS-MANVILLE, H. W., CO.
Rajah Auto Supply Co.
Silvex Co., The
Splitdorf Electrical Co.

SPEED INDICATORS
FOXBORO CO., INC.
JOHNS-MANVILLE, H. W., CO.
Stewart-Warner Speedometer Corp.

STABILIZERS
Greene Aeronautical Co.
Martin Aerodynamic Stabilizer.
SPERRY GYROSCOPE CO.

STAMPINGS
BLUM, JULIUS & CO.
ENAMELING & STAMPING CORP. OF NEW YORK
LANSING STAMPING & TOOL CO.
Dewes Co., The A.
STIMPSON, EDWIN B., CO.

STARTERS
Bijur Motor Lighting Co.
Bosch Magneto Co.
CHRISTENSEN ENGINEERING CO., THE
Dayton Engineering Laboratories Co.
MOTOR-COMPRESSOR CO.
Northeast Electric Co.
Remy Electric Co.
Wagner-Hoyt Electric Co.

TANKS
Janney, Steinmetz & Co.

THERMOMETERS
FOXBORO CO., INC., THE
MOTO-METER CO.
TAYLOR INSTRUMENT COMPANIES.

TIRES AND RUBBER
Dural Rubber Corp.
GOODYEAR TIRE & RUBBER CO.
Hodgman Rubber Co.
United States Rubber Co.
WOOD, J. W., ELASTIC WEB CO.
Whitley Exerciser Co.

TOOLS
American Tool Works Co.
Bass Brothers
BLUM, JULIUS & CO.
BROOKS MACHINE CO.
Browne & Sharpe
Buffum Tool Co.
Cooper Aeroplane Co., The John D.
HALL-SCOTT MOTOR CAR CO.
HAMMACHER, SCHLEMMER & CO.
LANSING STAMPING & TOOL CO.
Peck, Stowe & Wilcox Co.
Rich Tool Co.
Rogers Works, John M.
Smith & Hemenway
WHITMAN & BARNES MFG. CO.

TRUCKS AND TRAILERS
Federal Motor Truck Co.
Four Wheel Drive Auto Co.
Fruehauf Trailer Co.
Nash Motors Co.
Packard Motor Car Co.
Sechler Company, The
Service Motor Truck Co.
White Company, The

TUBING
American Tube Co.
BLUM, JULIUS & CO.
Dewes Co., The A.
Empire Art Metal Co.
Frasse & Co., Peter A.
National Tube Co.
PENNSYLVANIA FLEXIBLE METALLIC TUBING CO.
STIMPSON, EDWIN B., CO.

TURNBUCKLES
Aero Mfg. & Accessories Co.
DAYTON METAL PRODUCTS CO.
Dillner-Meyer Mfg. Co.
ERIE SPECIALTY CO.
National Aeroplane Co.
New York & Hagerstown Metal Stamping Co.
STANDARD TURNBUCKLE CO.
STEEL PRODUCTS CO.

WHEELS
ACKERMAN WHEEL CO.
Dayton Wire Wheel Co.
Hayes Wheel Co.
Mott Wheel Works
NATIONAL WIRE WHEEL WORKS
SPRANGER WIRE WHEEL CORP.
Watson Wheel & Rim Corp.
Wire Wheel Corporation of America

WIRE
American Steel & Wire Co.
Century Telephone Construction Co.
Electric Cable Co.
NEW YORK WIRE AND SPRING CO.
Rathbone, A. B. & J.
ROEBLING'S SONS, JOHN A.
Simplex Wire & Cable Co.
Upson-Walton Co.

WIRELESS
American Radio & Research Corp.
American Wireless Telegraph Co.
Cutting & Washington, Inc.
Crocker-Wheeler Co.

YALE TRADE MARK

Yale Spur-Geared Block Serving a War Machine

Safety, unskilled labor and the Yale Spur-Geared Block make a fine combination.

The block will *not* drop the load. This means no accidents. It's speedy; saves men, and Yale quality is featured in the construction.

For factory locking equipment use a Yale Master-Key System. Write for particulars.

For Sale by Machinery Supply Houses

Put Your Hoisting Problems Up to Us

The Yale & Towne Mfg. Co.

No. 9 East Fortieth Street New York

Yates

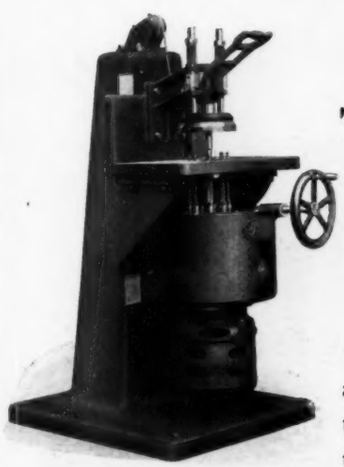

Type C-20 Propeller Boring Machine

A recently perfected machine for automatically boring the necessary holes in the modern aeroplane propeller hub in one operation. Extremely durable, compact, and efficient. Does absolutely accurate and uniform work. Specially designed so that no oil can get on and injure the stock. Either belt or direct motor drive.

Send today for complete details

P. B. Yates Machine Co.

BELOIT, WISCONSIN, U. S. A.

Factors of Safety

These Count in Aeroplane Construction

NON-INFLAMMABLE

Cellulose Acetate Base

Celestron Cloth Varnishes

provide another SAFETY FACTOR

NON-INFLAMMABLE

Celestron Sheets AND Films

Transparent — Waterproof

MANUFACTURED BY

Chemical Products Company

93 Broad Street **Boston, U. S. A.**

Manufacturers of Cellulose Acetate for nearly 15 years

GROVER C. LOENING

Announces

THE NEW 1918 EDITION

ENLARGED

and

SIMPLIFIED

Of his extensively used textbook

Military Aeroplanes

Almost doubled in size and with the finest halftone and linecuts available

For sale
GROVER C. LOENING
45 Eleventh St.
Long Island City, N. Y.

Price $4.75

Air Speed Indicators

Altimeters

Barographs

Compasses, etc.

International Aeronautical Instrument Corporation

(Formerly A. HAUSTETTER)

308 Madison Avenue **New York**

JACUZZI BROTHERS

2034 San Pablo Avenue, Berkeley, Calif.

Propeller Manufacturers

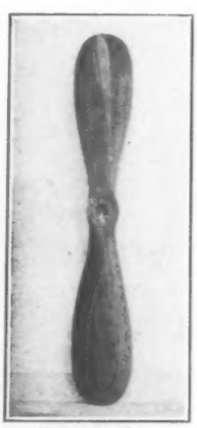

For Airships

For Airplanes

OVER TWENTY TYPES OF PROPELLERS ARE MANUFACTURED CONTINUALLY AT OUR PLANT

WE DESIGN PROPELLERS TO MEET DIFFERENT REQUIREMENTS

Write for our price list

STIMPSON-RIVETS

LARGE STOCK REGULAR SIZES — SPECIAL TO ORDER

WE MAKE SCREW HEAD NAILS AND RIVETS FOR EVERY PURPOSE.
EYELETS, HOOKS, GROMMETS AND WASHERS FOR SHOES, SHELTER TENTS, CORSETS, LEGGINS, MAIL BAGS.

70 FRANKLIN AVENUE 70 BROOKLYN, NEW-YORK

FOXBORO

QUALITY INSTRUMENTS FOR AIRPLANES

Airspeed Indicator or Buoyancy Meter
Gasoline Level Indicator
OIL PRESSURE GAUGE

Indicating Dial Type Thermometer
for circulating oil and water
AIR PRESSURE GAUGE

The Foxboro line also includes many different types of indicating and recording gauges and thermometers designed for all sorts of conditions and purposes.

THE FOXBORO CO., Inc., FOXBORO, MASS., U.S.A.

NEW YORK CHICAGO PITTSBURGH PHILADELPHIA ST. LOUIS
SAN FRANCISCO BIRMINGHAM, ALABAMA PEACOCK BROS., MONTREAL

Aluminum Company of America

PITTSBURGH, PA.

MANUFACTURERS OF

Aluminum Ingot, Sheet, Tubing, Wire, Rod, Rivets, Moulding Extruded Shapes, Electrical Conductors

GENERAL SALES OFFICE,
2400 Oliver Building, Pittsburgh, Pa.

BRANCH OFFICES:

Boston.....131 State Street
Chicago.....1500 Westminster Building
Cleveland.....950 Leader-News Building
Detroit.....1512 Ford Building
Kansas City.....308 R. A. Long Building
New York.....120 Broadway
Philadelphia....1216-1218 Widener Building
Rochester.....1112 Granite Building
San Francisco.....731 Rialto Building
Washington..509 Metropolitan Bank Bldg.

CANADA
Northern Aluminum Co., Ltd.....Toronto

LATIN AMERICA
Aluminum Co. of So. Am...Pittsburgh, Pa.

ENGLAND
Northern Aluminium Co., Ltd.....London

Send inquiries regarding aluminum in any form to nearest Branch Office, or to General Sales Office

Certus Cold Glue

The Glue with a Grip that Never Lets Go

Certus is the original waterproof glue, every package bears the trade mark, use no imitation. Certus met all government requirements. It's the one glue that does more than asked for.

Get in touch with

Certus Cold Glue Co.

Factories at
Detroit, Mich. Minneapolis, Minn.

SEAMLESS STEEL TUBING

Large Stock on Hand

Prompt Mill Deliveries

COLD DRAWN SHAFTING AND SCREW STEEL

Eastern Distributor: BORDENTOWN STEEL & TUBE CORP.

JULIUS BLUM & COMPANY **510-512 West 24th Street, New York, N. Y.**

Branches: Boston, Chicago, Philadelphia

ORDNANCE ENGINEERING CORPORATION

NEW YORK OFFICE
120 Broadway, Equitable Building

LONDON OFFICE
19 Queen Anne Chambers, Westminster, S. W.

Government Contractors : : Consulting Engineers

Manufacturers of Illuminating Shells, Trench Howitzers, Hand Grenades, etc., etc.

Naval and Military Appliances and Parts designed, developed and perfected

Designers and Builders of Military and Naval
AIRCRAFT

PHOTOGRAPHIC TESTING DEPARTMENT OF CAMERAS

THE BROCK AUTOMATIC CAMERAS

are the only cameras that make good negatives with shutter speeds of 1/100th of a second or less at speeds of over 100 miles per hour.

ARTHUR BROCK, JR.

OFFICE—511 Bullitt Building, 131 South Fourth Street
FACTORY—533 North Eleventh Street
PHILADELPHIA, PA.

Scientific Instruments, Tools, Dies, Jigs and Fixtures

Factory occupies 23,000 square feet of floor space
Screw Machine Capacity up to 2¼ inches

K-A-U-R-I

TRADE MARK

WATERPROOF VARNISH
KAURI PAINT
Khaki and Gray
GLOSS BLACK ENAMEL

Used on wings, hulls and pontoons by the largest airplane manufacturers and boat builders because they are most durable, elastic, waterproof and economical. On the United States Government approved list.

BROOKLYN VARNISH MFG. CO.
35 Nostrand Avenue, Brooklyn, New York

FLYING SCHOOL can accommodate six more students at once, teaching the United States and French methods of flying, using Military Tractors, dual Dep control and Curtis motors. Excellent living accommodations—hotel or private. Ideal field and surroundings for grasscutter and solo flights.

Special Offer to Mechanical Students

ELLING O. WEEKS, Chief Instructor
WM. T. COOK, General Manager and Consulting Engineer

INDEPENDENCE AIRCRAFT COMPANY
INDEPENDENCE, KANSAS

DUESENBERG

THE POWER OF THE HOUR

DUESENBERG MOTORS CORPORATION
120 BROADWAY, NEW YORK CITY
CONTRACTORS TO THE UNITED STATES GOVERNMENT

AIRPLANE MANUFACTURERS

The United States Government uses and endorses

THE WARNER AIRPLANE CONTROL

"There's a Reason"

particulars furnished upon request

Wm. Deshler Warner—*Sole Mfgr.*
Eight · East · Broad · Street
COLUMBUS····OHIO

DON'T SCRAP ALUMINUM PARTS

USE SO-LUMINUM—NEW WELDING SOLDER

Broken 90 H. P. Fiat crank case repaired for the United States Navy in six hours' time and at $15.00 expense by use of So-Luminum, as against $400.00 and five months' time to get a new one—it in perfect condition after two years' use. Use gasoline or blow torch—no flux or special tools required.

Booklet and directions on request. Sample bar, $1.00. Used and indorsed by the United States Army and Navy, auto and aero. companies, and indorsed by the British Munitions Board.

SO-LUMINUM MFG. & ENG. CO., Inc
Room 25, 1790 Broadway New York City

HULLS FOR FLYING BOATS

PONTOONS FOR SEAPLANES

Palmer-Simpson Corporation
Saranac Lake, N.Y.

AMERICAN PROPELLER & MFG. CO.
TRADE MARK
PARAGON
BALTIMORE MARYLAND U.S.A.

D'Orcy's Airship Manual

"A singularly timely and useful work, which does for the aerial navies of the world something like what Brassey's Annual does for the marine fleets."—*New York Tribune, June* 8, 1918.

$4.00

THE GARDNER-MOFFAT CO., INC.
120 West 32d Street New York

ROEBLING AIRCRAFT WIRE

STRAND AND CORD

Thimbles and Ferrules

John A. Roebling's Sons Co.
TRENTON, NEW JERSEY

Agencies and Branches
New York Boston Chicago Philadelphia Pittsburgh Cleveland
Atlanta San Francisco Los Angeles Seattle Portland, Ore.

All recognized builders of airplane motors in America use *Zenith* on their product.

Zenith Carburetor Company

New York DETROIT Chicago

PROPELLERS

WA DOYLE
TRENTON NJ

CAPITAL INTERNAL GRINDER **STAMPINGS** JIGS TOOLS DIES

WE realize *in air* or *at sea* there should be *no faulty* material. All machine parts must be made *right* and perform their functions *properly*, hence we have equipped our new plant to turn out work of the highest quality. We offer our facilities to you and trust we may be of service.

Will you give us a trial?

LANSING STAMPING & TOOL CO.

LANSING, MICHIGAN

PENNSYLVANIA INTERLOCKING METAL HOSE

METAL HOSE

For every Airplane Requirement

Write for specifications and prices

PENNSYLVANIA FLEXIBLE METALLIC TUBING COMPANY

Broad and Race Streets, Philadelphia

New York, Boston, Chicago, Detroit, Cleveland

LEYGRAND & CO.

120 Broadway, New York

MILL AGENTS

ALUMINUM SHEETS

Screw Stock, Rod and Wire

Tycos

Aviation Barometer

Made in U. S. A.

Write for Information

Taylor Instrument Companies

Rochester, N. Y. U. S. A.

For over sixty years makers of scientific instruments of superiority

THE BROOKS MACHINE CO.

Designers and Manufacturers of

SPECIAL TOOLS,
GAUGES OF ALL KINDS,
JIGS, FIXTURES *and* PARTS *for*
AIRPLANE ENGINES

YORK, PENNA.

Wisconsin

CONSISTENT

AEROPLANE MOTORS

are correctly designed with the highest quality materials and workmanship.

Write for catalog of 6 and 12 cylinder models.

WISCONSIN MOTOR MFG. CO.

Station A. Dept. 338. Milwaukee, Wis., U. S. A.

The "Perfect Starter"

Two Models



This starter is idle when not in use and leaves the motor entirely free, so that interference with the engine is impossible. The United States Government and the British, Dutch, Norwegian, and Swedish Governments as well, have tested and approved this device.

Write for Free Booklet

THE MOTOR-COMPRESSOR COMPANY, Newark, N. J., U. S. A.

Berling Magneto

insures a hot, fat spark at any altitude

Worth more
Does more

Manufactured by the
Ericsson Mfg. Co.
Buffalo N.Y. U.S.A.

DOEHLER

BABBITT-LINED BRONZE

BEARINGS

have been used for years with the utmost success by the leading motor manufacturers in the automobile and airplane industries.

DOEHLER DIE-CASTING CO.

MAIN OFFICE AND EASTERN PLANT
BROOKLYN. N.Y.

WESTERN PLANT
TOLEDO. OHIO.

NEW JERSEY PLANT
NEWARK. N.J.

Also Die-Cast Babbitt Bearings, Die-Castings in Brass & Bronze Aluminum and White Metal Alloys

Aeroplane Cylinder Forgings

We make a specialty of hollow forging in dies under our hydraulic presses, aeroplane cylinder forgings of high and low carbon O.H. or alloy steels.

We have furnished cylinder forgings to practically all the engine builders in the United States.

Also Propeller Hubs, Flanges and Shafts, etc

Miscellaneous steam hammer and hydraulic press die forgings of all types.

Quick service our specialty

TIOGA STEEL & IRON COMPANY

52nd & Grays Avenue Philadelphia, Pa., U. S. A.

"Supremacy in the Air the Key to Victory!"

Learn Aviation Mechanics

Train Yourself for the Aviation Service and the Aircraft Industry by taking advantage of

Our Ground Course in Aviation Mechanics

Affording preparation prior to entering Government Ground School, covering aero-dynamics, aero-engines, rigging and Lewis gunnery. Previous experience unnecessary.

WE ARE THE PIONEER AVIATION SCHOOL

Aviation Mechanics Course (6 weeks)..... $60

Aero-Engine Course (4 weeks)..... $35

Wireless Course (4 weeks)... $25

Write for our Illustrated Booklet "F"—"A Message to You on Aviation"

EAGLE AVIATION SCHOOL

110-114 West 42d Street

Telephone Bryant 9078

New York

Quality Springs

Specialists in Heat-Treating Vanadiums

New York Wire & Spring Company

586 Washington Street, New York

Classified Advertising

10 cents a word, minimum charge $2.00, payable in advance. Address replies to advertisements with box numbers, care of AVIATION AND AERONAUTICAL ENGINEERING, 120 West 32d Street, New York.

FOR SALE—Two Model "O" Curtiss and "80" eight-cylinder aviation motors complete with blades, tanks and radiators. These motors practically new. Priced right for cash. Address C. C. Sidnam, P. O. Box 275, Anaheim, Cal.

WANTED—Experienced draftsmen or draftswomen immediately. State experience, age, salary expected and reference. Gallaudet Aircraft Corp., East Greenwich, R. I.

FOR SALE—Tractor seaplane, new, nearly completed. Farman-Curtiss pusher. Exhibition pusher two-thirds completed. Monoplane parts. Pontoons. Propellers. At small fraction of cost. 986 Trumbull Ave., Detroit, Mich.

WANTED—Six-cylinder Anzani motor in good condition, Box 85.

FOR SALE—U. S. Aeroplane Patent. Does not infringe on Wright Patent. Has automatic ailerons, universal rudder, stagger type to up date model. Address Otto Fenn, Lincoln Park, N. J.

INDEX TO ADVERTISERS

A

Ackerman Wheel Co. ... 48
Ajax Auto & Aero Sheet Metal Co. ... 54
Aluminum Co. of America ... 63
American Bronze Corp. ... 11
American Lead Pencil Co. ... 57
American Propeller & Manufacturing Co. ... 65
Astoria Veneer Mills & Dock Co. ... 50

B

Barcalo Mfg. Co. ... 18
Betz-Pierce Co., The ... 9
Blum, Julius, & Co. ... 64
Boeing Airplane Co. ... 44
Boston Auto Gage Co. ... 56
Brock, Arthur, Jr. ... 64
Brooklyn Varnish Co. ... 64
Brooks Machine Co. ... 66
Burgess Co., The ... 4

C

Certus Cold Glue Co. ... 63
Chemical Products Co. ... 62
Christensen Engineering Co., The ... 50
Cold Light Manufacturing Co. ... 59
Continental Aircraft Corp. ... 51
Curtiss Aeroplane & Motor Corp. ... 72

D

Dalton Manufacturing Corp. ... 55
Dayton Metal Products Co. ... 17
Defiance Machine Works ... 53
Doehler Die Casting Co. ... 67
Doyle, W. A. ... 66
Duesenberg Motors Corp. ... 65
Dupont American Industries ... 12

E

Eagle Aviation School ... 67
Enameling and Stamping Corp. ... 50
Ericsson Manufacturing Co. ... 67
Erie Specialty Co. ... 53

F

Fahrig Metal Co. ... 60
Flexo Manufacturing Co. ... 54
Foxboro, The, Co. ... 63
Fox Machine Co. ... 55

G

General Bakelite Co. ... 8
Gillette Safety Razor Co. ... 69
Goodyear Tire & Rubber Co. ... 14
Gurney Ball Bearing Co. ... 71

H

Hall-Scott Motor Car Co. ... 3
Hartzell Walnut Propeller Co. ... 52
Hammacher, Schlemmer & Co. ... 48
Hendee Manufacturing Co. ... 58
Holbrook Co., The ... 49

I

Independence Aircraft Corp. ... 65
International Aeronautical Instrument Corp. ... 54

J

Jacuzzi Bros. ... 62
Jamestown Propeller Co. ... 56
Johns-Manville Co., The H. W. ... 57

K

Kawneer Mfg. Co. ... 13

L

L. W. F. Engineering Co. ... 5
Lansing Stamping & Tool Co. ... 66
Lanzius Aircraft Co. ... 50
Leygrand & Co. ... 66
Loening, Grover C. ... 62

M

Martin, Glenn L., Co. ... 2
Mattison, C., Machine Works ... 53
Moto Meter Co., Inc., The ... 10
Motor-Compressor Co. ... 67
Multiple Storage Battery Co. ... 58

N

New Departure Mfg. Co. ... 20
New York Wire & Spring Co. ... 67

O

Ordnance Engineering Co. ... 64

P

Palmer-Simpson Co. ... 65
Park Drop Forge Co. ... 47
Penn. Flexible Metallic Tubing Co. ... 66
Pratt and Lambert, Inc. ... 70
Philips-Brinton Co. ... 15
Pryibil, P., Machine Co. ... 46

R

Radium Dial Co. ... 47
Radium Luminous Material Corp. ... 60
Roebling's, John A., Sons Co. ... 65
Rome-Turney Radiator Co. ... 56

S

So-Luminum Mfg. & Eng. Co. ... 65
Sherwin-Williams Co. ... 16
Sperry Gyroscope Co. ... 19
Spon and Chamberlain ... 50
Standard Aircraft Corp. ... 7
Standard Turnbuckle Co. ... 60
Steel Products Co., The ... 45
Stimpson, Edward B., Co. ... 63
Strauss & Buegeleisen ... 49
Strong, Carlisle & Hammond Co. ... 43

T

Taylor Instrument Companies ... 66
Thomas-Morse Aircraft Corp. ... 52
Tioga Steel & Iron Co. ... 67

U

Union Gas Engine Co. ... 6

V

Valentine & Co. ... 41

W

Wakefield, C. C., Co., Ltd. ... 51
Warner, Wm. Deshler ... 65
West Woodworking Co. ... 58
Widman, J. C., & Co. ... 46
Wisconsin Motor Manufacturing Co. ... 66
Witteman-Lewis Aircraft Co. ... 51
Wood, J. W., Elastic Web Co. ... 60
Wyman-Gordon Co. ... 18

Y

Yates, P. B., Machine Co. ... 61
Yale and Towne Mfg. Co. ... 61

Z

Zenith Carburetor Co. ... 66

Gillette SAFETY RAZOR

The New U.S. Service Set—A solid metal case, heavy nickel-plated and embossed with the Insignia of the U. S. Army and Navy. Strong, thin, compact: 1⅞ inches wide, 4 inches long, ⅝ inch thick. 12 double-edged Gillette Blades (24 Shaving Edges). Contains a nickel-plated Gillette Safety Razor and Blade Box. Indestructible Trench Mirror inside the lid. **$5**



Military Set No. 18—For Uncle Sam's Officers, a Gillette Combination Set, in case of U. S. Regulation Khaki twill — nickel-plated "Bulldog" Razor; indestructible Trench Mirror fitted in pocket in lid; Shaving Brush and Stick Gillette Shaving Soap in nickel-plated Holders; two Blade Boxes; 12 double-edged Gillette Blades (24 Shaving Edges). **$7**

When you are overseas—you'll need a Gillette even more than you do here in camp

Trench life is harder. Shaving more difficult. A Soldier's skin is apt to be burned or chapped. Hot water seldom to be had. Four years of war have done more to prove Gillette *principles* and demonstrate Gillette *service* than fifty years of peace.

The principle of No Stropping, No Honing saves time. It saves space and weight. It does away with strop and hone—gives the fighting man his shaving kit in one compact unit. There is no shaving edge anywhere so good and *lasting* as the edge of the Gillette Blade.

Have you seen the new Gillette Sets specially made for the fighting man? Two of them are illustrated on this page. They were designed by members of the Gillette Organization in the Service — men who know what the fighting man is up against.

Simple and compact, fit the pack, the pocket or the ditty box. No strops or hones to clutter up the kit. Blades always sharp, always ready. No Stropping—No Honing. When a man wants new Blades he can get them in any Post Exchange, Ship's Canteen, or Y.M.C.A. Hut, here in America or overseas.

Our Paris Office carries stocks — is constantly supplying the American Expeditionary Forces. Gillette Safety Razors and Blades on sale everywhere in France, England, Italy, and the Eastern battle fronts.

Here's the Way to Get 100% Efficiency Out of Your Gillette

Try this when you shave tomorrow morning. Lather the beard thoroughly, and rub well in — that's essential with any shave. Put in a new blade and screw the handle down *tight*. If you want a specially close shave, *unscrew* the handle a *part turn*.

Hold the razor *naturally* and *easily*, and tilt the handle so you can just feel the blade engage the beard. Then shave with short slanting strokes. It doesn't require any brute force to shave with a Gillette—the razor does the work.

Gillette Safety Razor Co.
of Canada, Ltd.
73 St. Alexander St.
Montreal, P. Q., Canada

Gillette Safety Razor Societe
Anonyme
17 Bis, Rue La Boetie
Paris, France

Gillette Safety Razor, Ltd.
200 Great Portland St.
London, W., England

A. G. Micheles
53 Liteiny, Petrograd, Russia

Vedova Tosi Quirino & Figli
Via Senato, 18
Milan, Italy

Gillette Safety Razor Company
Boston Mass·U·S·A·

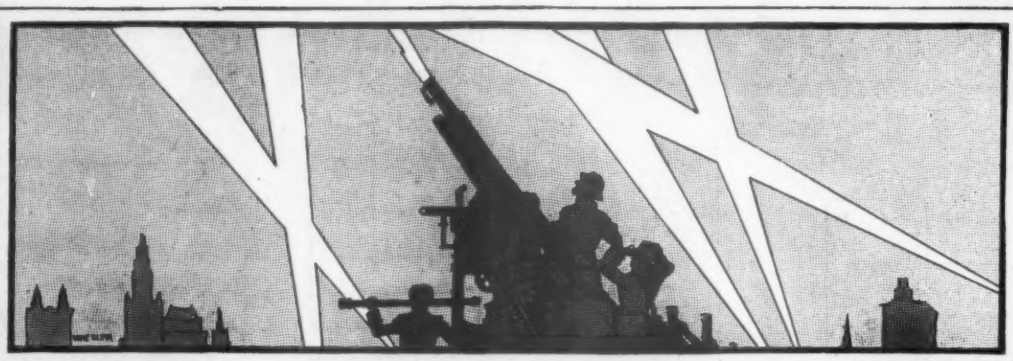

PRATT & LAMBERT AIRPLANE VARNISHES

AS pioneers in the study of the application of varnish requirements to the airplane industry, we offer to all airplane manufacturers an unusual experience and service through our Airplane Varnish Laboratory.

We are manufacturers of air-drying and baking varnishes, enamels and finishes for brushing, spraying and dipping, for all aircraft purposes, including the following:

Impermakin — *a waterproof varnish for wood and fabric*
Anti-Actinic Wing Enamel, *all colors* Navy Pontoon Enamel, *all colors*
Liquid Wood Filler Metal Fittings Lacquer
Propeller Varnish Insignia Coatings

PRATT & LAMBERT-INC.
Pioneers in the Manufacture of Airplane Finishes
134 TONAWANDA STREET
BUFFALO, N. Y.

FACTORIES
NEW YORK BUFFALO CHICAGO
BRIDGEBURG, ONTARIO

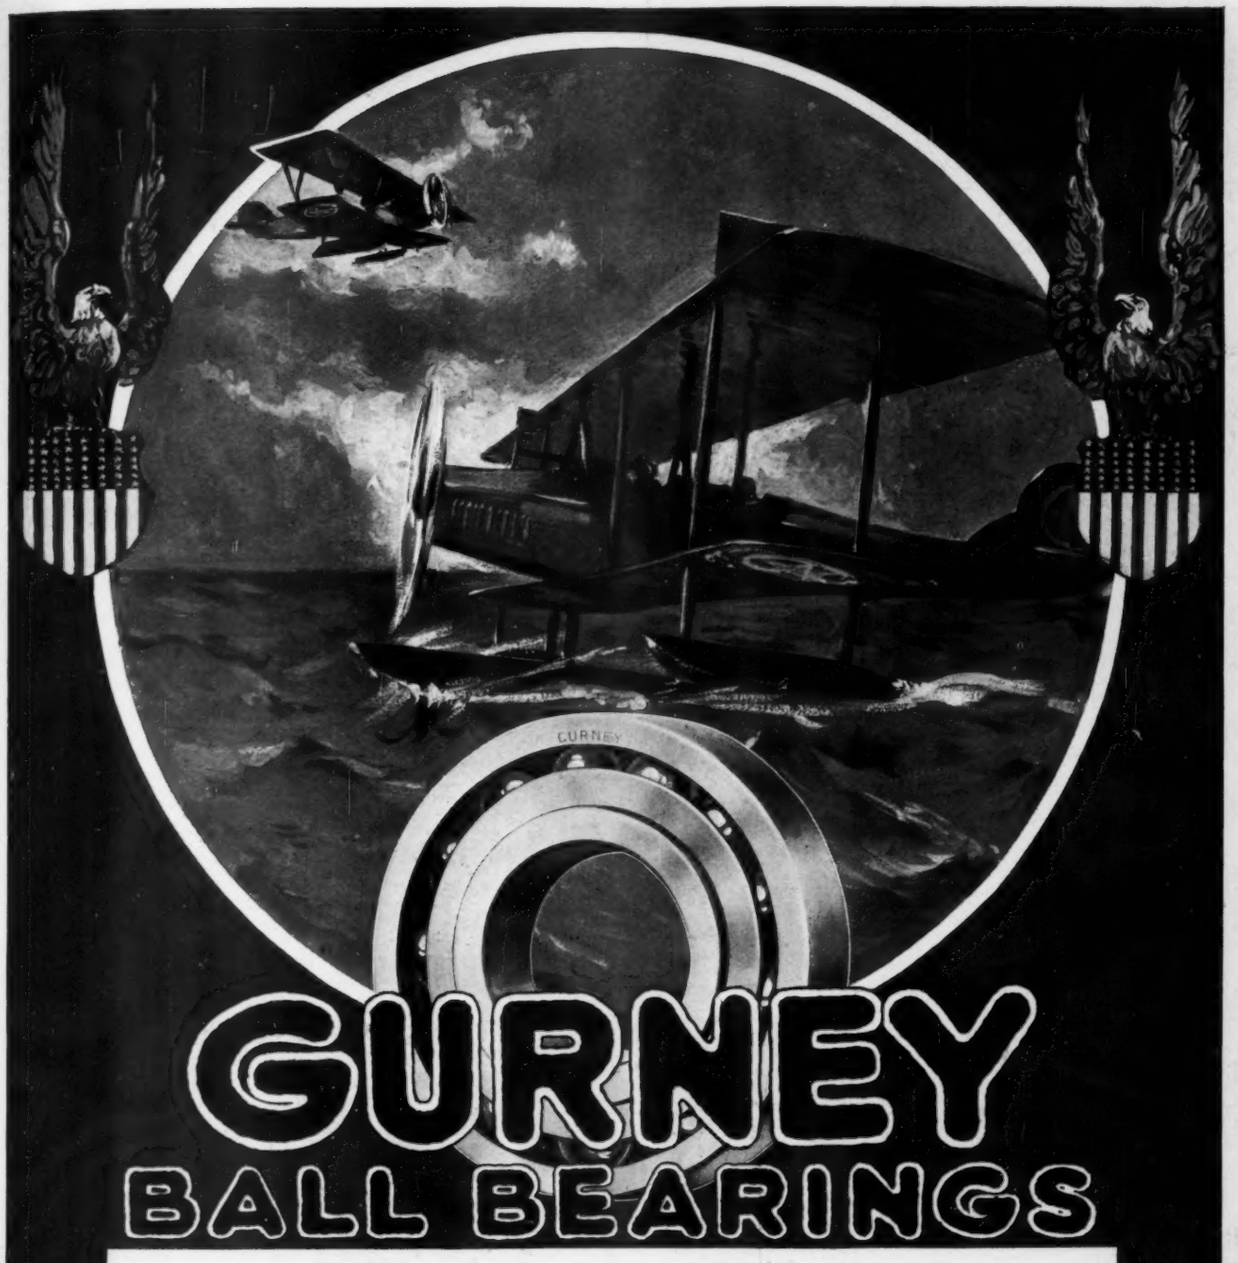

GURNEY
BALL BEARINGS

For Speed, Simplicity and Lightness

GURNEY Radio-Thrust Bearings give simplicity and lightness where thrust loads must be carried, because the single bearing carries both the radial and thrust loads on a single row of balls.

This eliminates the necessity of separate radial and thrust bearings.

Three different types of radio-thrust bearings are furnished to carry various combinations of radial and thrust loads.

The "200% type" of bearing carries thrust loads twice as great as the radial capacity of the bearing.

All Gurney Ball Bearings have greater load capacity, because the patented method of assembling permits the assembly of more and larger balls in the raceways.

GURNEY BALL BEARING CO.

Conrad Patent Licensee

Jamestown, New York

286

THE WILLIAMS PRINTING COMPANY, NEW YORK

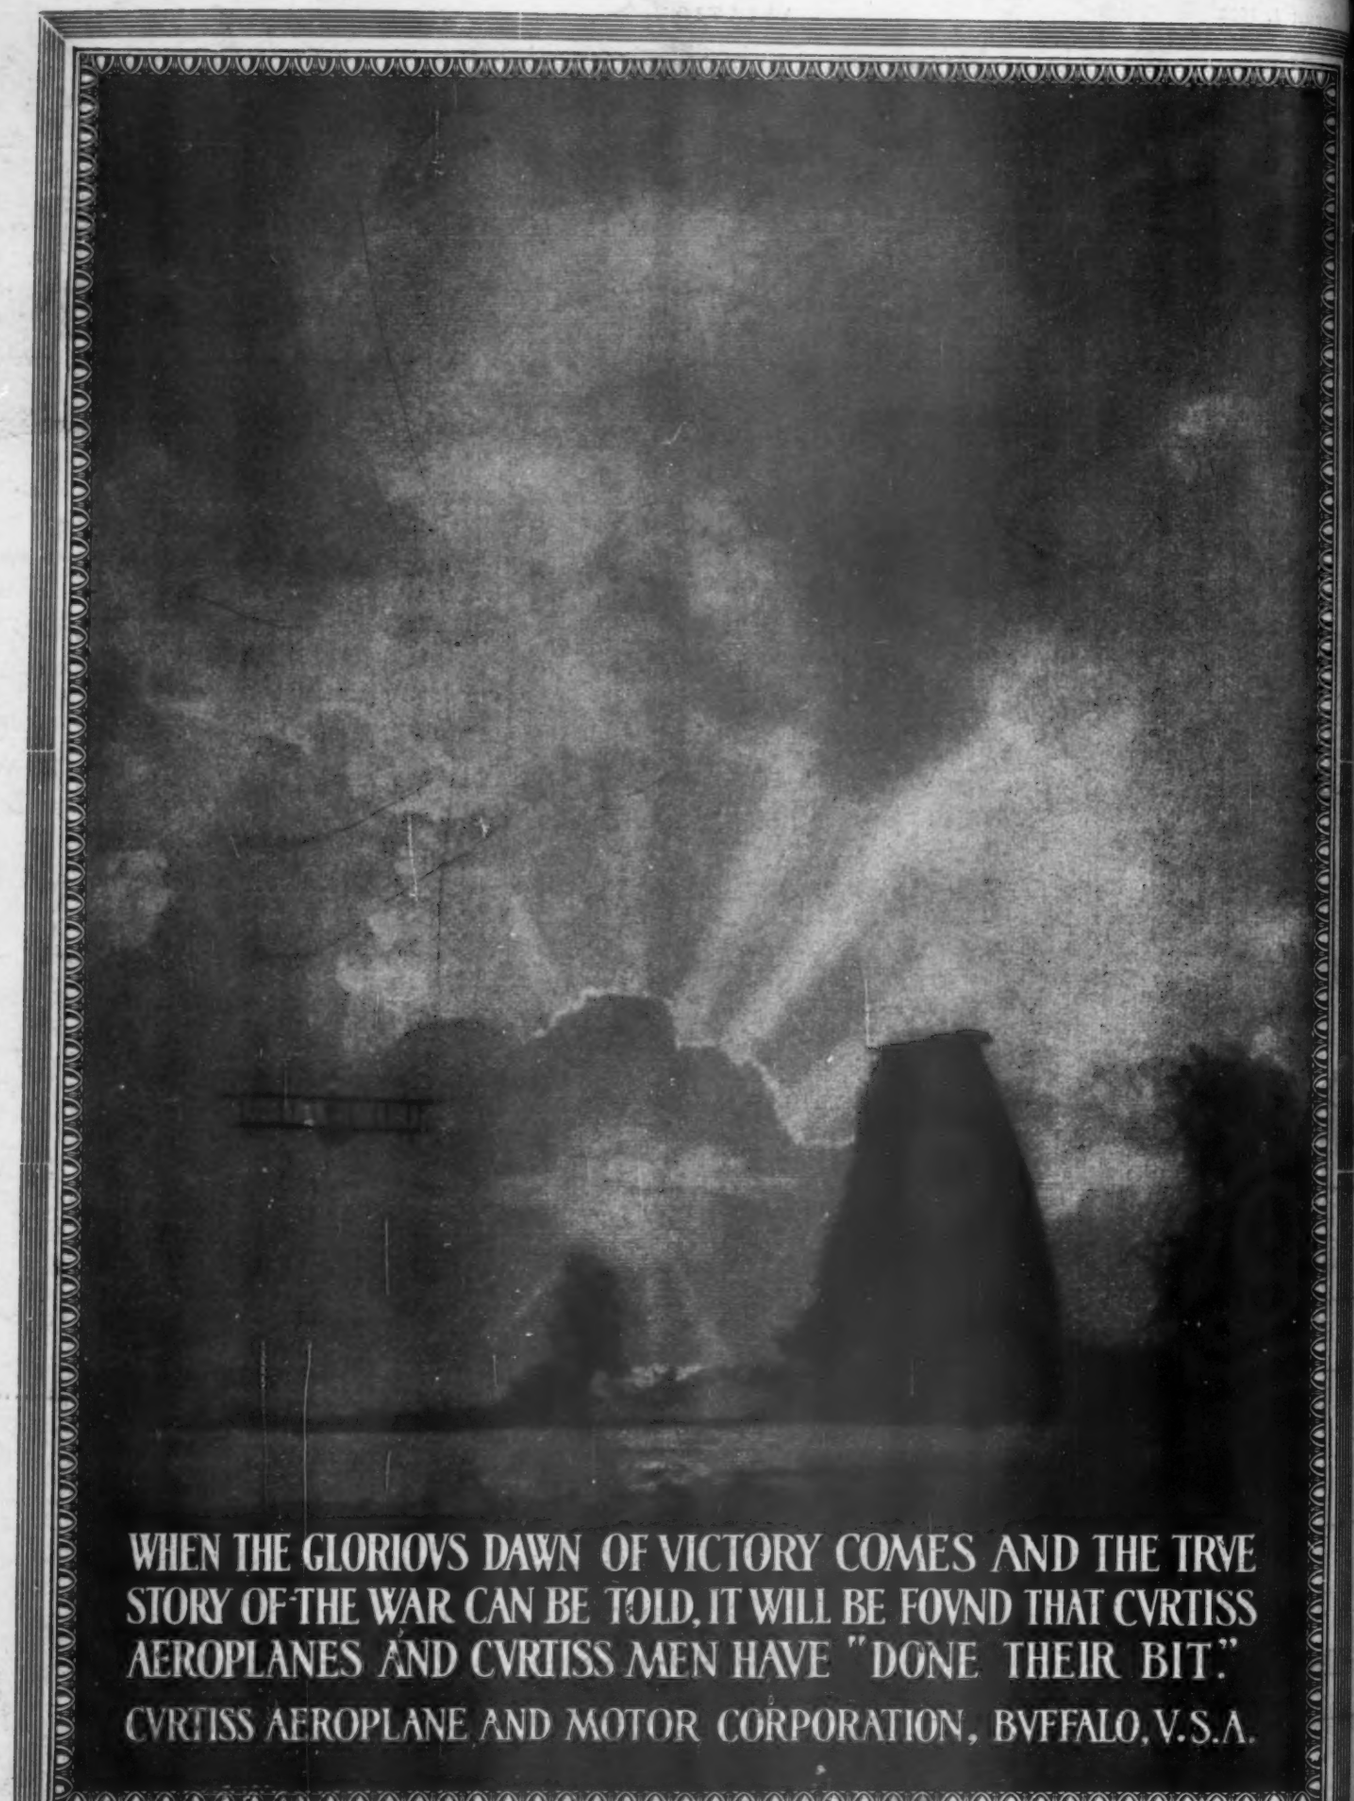

WHEN THE GLORIOVS DAWN OF VICTORY COMES AND THE TRVE STORY OF THE WAR CAN BE TOLD, IT WILL BE FOVND THAT CVRTISS AEROPLANES AND CVRTISS MEN HAVE "DONE THEIR BIT."

CVRTISS AEROPLANE AND MOTOR CORPORATION, BVFFALO, V.S.A.